
FLARE NUT 60°

10mm (3/8") BSP Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56002LF**

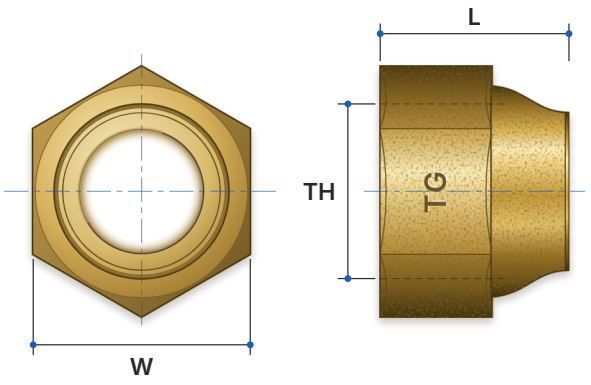



SIZING CHART (MM)

Part No.	L	W	TH
56002LF	18.0	20.7	G 3/8"

L = overall length. W = hex across flats. TH = female thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **3/8" copper tube, 60° flare** (G 3/8" BSP female)

MATERIAL CHART

Part	Material
Flare Nut	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 60° flare compression
- Threads to AS 1722.2
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.