
FERRULE BEND

20mm Male BSP / Capillary Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71186LF**

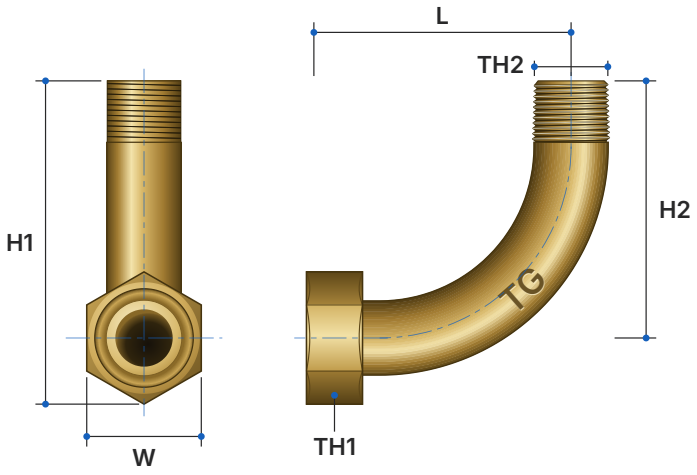



SIZING CHART (MM)

Part No.	L	H1	H2	W	TH1	TH2
71186LF	88.0	111	88.0	39.2	G 1"	R 3/4"

L = outlet face to inlet centre. H1 = overall height (inlet face to nut corner). H2 = inlet face to outlet centre. W = nut across flats. TH1 = nut thread. TH2 = inlet thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 3/4" male x G 1" nut** (20 mm capillary inside)

MATERIAL CHART

Part	Material
Bend	DR Lead Free Brass (CW511L)
Nut	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

100% pressure tested

Threads to AS ISO 7.1 and AS 1722.2

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.