
COMPRESSION TEE FEM

15mm (1/2") Compression x Female 1/2" branch, nyl

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **54072LF**

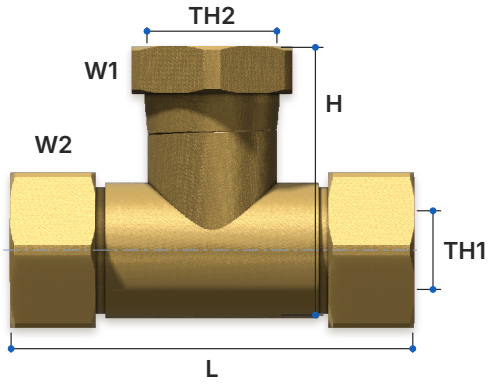



SIZING CHART (MM)

Part No.	L	H	W1	W2	TH1	TH2
54072LF		43.2	25.8	25.0	1/2" copper tube	G 1/2"

L = overall length across the run, assembled. H = bottom of run body to branch thread face. W1 = branch hex across flats. W2 = compression nut across flats. TH1 = run (tube). TH2 = branch. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Connection **1/2" copper tube x G 1/2" female**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Nylon olive included

Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Compression nut	DR Lead Free Brass (CW511L)
Olive	Nylon

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.