
METER COUPLING

20mm Extendable x Rp 3/4" Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **C2170LF**

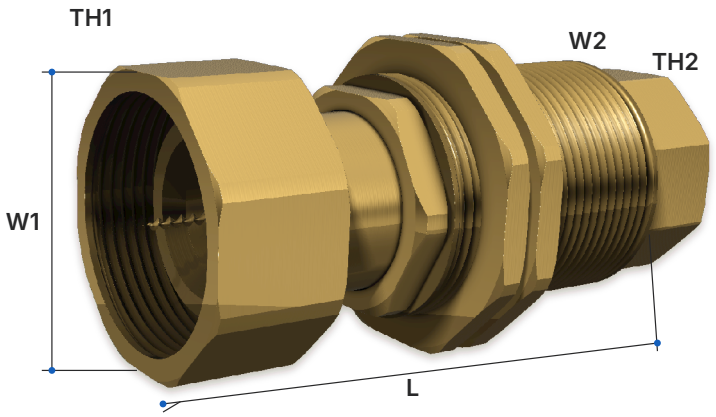



SIZING CHART (MM)

Part No.	L	W1	W2	TH1	TH2
C2170LF		42.0	31.2	36.6mm/14 TPI	Rp 3/4"

L = overall length (extendable, set on installation). W1 = meter nut across flats. W2 = body / second nut across flats. TH1 = meter nut thread. TH2 = outlet connection. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Connection **36.6mm/14 TPI meter nut (Whitworth) x Rp 3/4" female**

Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Extendable length, locked with twin lock nuts
- Pressure tested to 1500 kPa
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Meter nut, tail, bush, body, lock nuts	DR Lead Free Brass (CW511L)
Double cone olive	Nylon
Spring	Stainless steel 304

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.