
# FLARE UNION MALE

50mm (2") 60° Flare x R 2" Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56098LF**

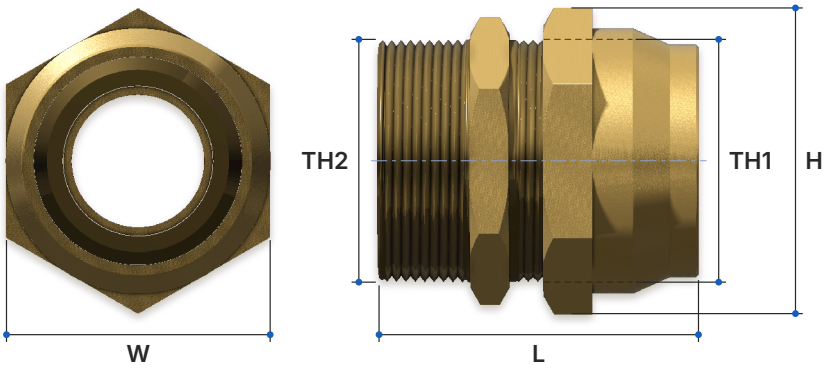





## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 56098LF | | 75.1 | 65.0 | G 2" 60° flare | R 2" |

L = overall length assembled. H = overall height (largest hex across corners). W = largest hex across flats. TH1 = flare nut thread. TH2 = body end. All dimensions in millimetres.

## SPECIFICATIONS

Connection **G 2" 60° flare x R 2" male**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Lead Free Brass (CW511L) |
| Flare nut | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 60° cone flare seat
- Tested and certified to AS 3688


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.