
LUGGED ELBOW NO.19

15mm (1/2") Tube x G 1/2" Male, 95mm Extended Le

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52406LF**

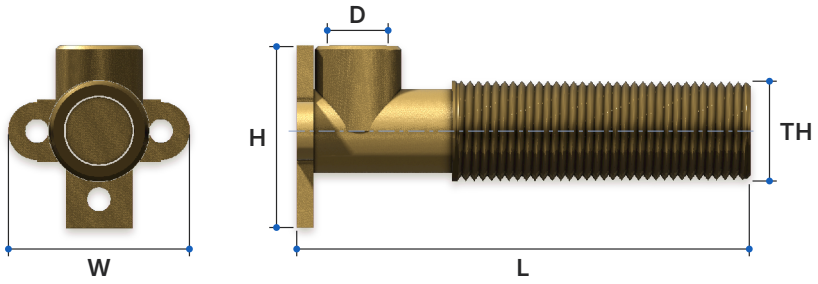



SIZING CHART (MM)

Part No.	L	H	W	D	TH
52406LF	95.0	38.0	38.0	12.75 - 12.82	G 1/2"

L = back of wall plate to thread end. H = wall plate height. W = wall plate width. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1/2" copper tube (capillary) x G 1/2" male**

MATERIAL CHART

Part	Material
Lugged Elbow	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS 1722.2

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.