
CONNECTOR NO.62

20mm (3/4") Tube x G 3/4" Union Nut Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52432LF**

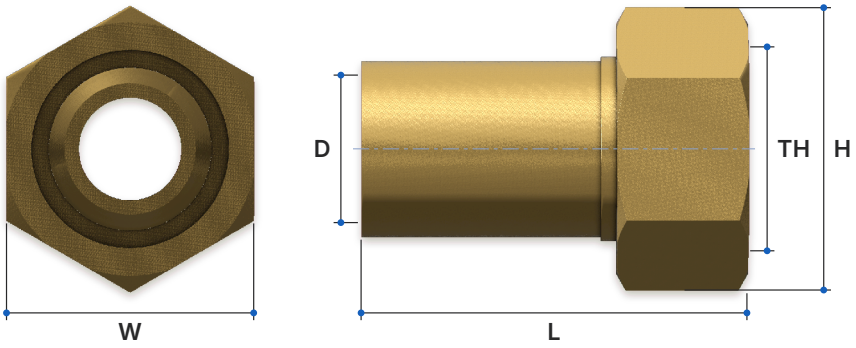



SIZING CHART (MM)

Part No.	L	H	W	D	TH
52432LF		36.6	31.7	19.07 - 19.17	G 3/4"

L = overall length assembled. H = overall height (nut across corners). W = nut across flats. D = capillary socket bore for copper tube (min - max). TH = nut female thread. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

- Working Temperature **1°C to 95°C**
- Maximum Pressure Rating **1600 kPa**
- Connection **3/4" copper tube (capillary) x G 3/4" female union nut**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS 1722.2
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Connector	DR Lead Free Brass (CW511L)

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.