
# CONNECTOR NO.68

20mm (3/4") Tube x G 1" BSP Nut Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52445LF**

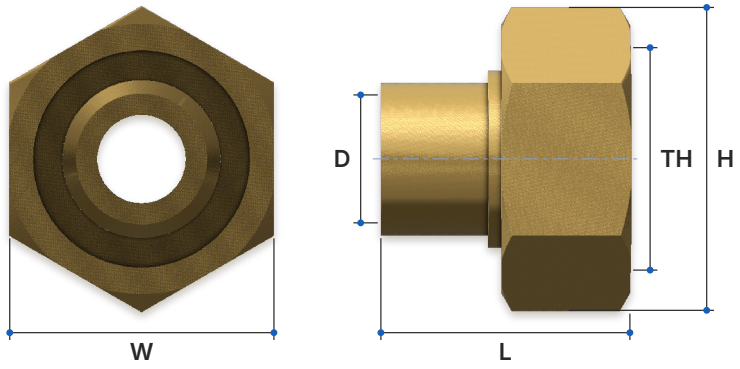





## SIZING CHART (MM)

| Part No. | L | H | W | D | TH |
|---|---|---|---|---|---|
| 52445LF | | 45.3 | 39.2 | 19.07 - 19.17 | G 1" |

L = overall length assembled. H = overall height (nut across corners). W = nut across flats. D = capillary socket bore for copper tube (min - max). TH = nut female thread. All dimensions in millimetres.

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **3/4" copper tube (capillary) x G 1" female nut**

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS 1722.2

Tested and certified to AS 3688

## MATERIAL CHART

| Part | Material |
|---|---|
| Connector | DR Lead Free Brass (CW511L) |


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.