
FERRULE BEND

32mm (1¼") Male BSP / Capillary Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **FG00604LF**

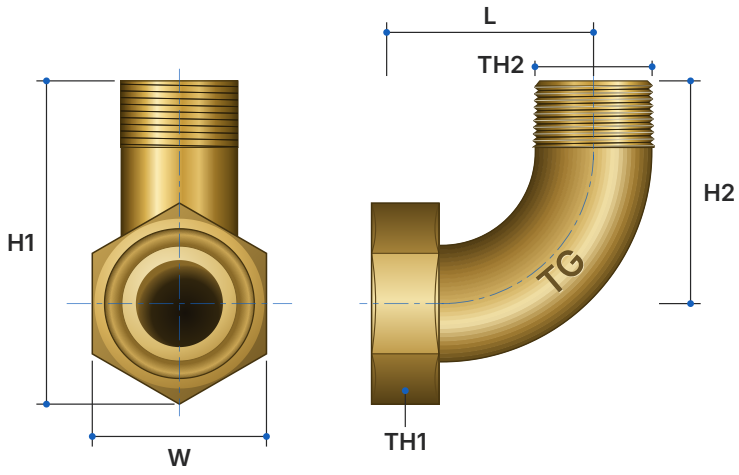



SIZING CHART (MM)

Part No.	L	H1	H2	W	TH1	TH2
FG00604LF	71.5	112	77	60.2	G 1-3/4"	R 1-1/4"

L = outlet face to inlet centre. H1 = overall height (inlet face to nut corner). H2 = inlet face to outlet centre. W = nut across flats. TH1 = nut thread. TH2 = inlet thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 1-1/4" male x G 1-3/4" nut** (32 mm capillary inside)

MATERIAL CHART

Part	Material
Bend	DR Lead Free Brass (CW511L)
Nut	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 100% pressure tested
- Threads to AS ISO 7.1 and AS 1722.2
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.