
LOCKABLE BALL VALVE

25mm M x F Straight Lilac (Recycled Water) Lead Fr

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **R1925-RLF**

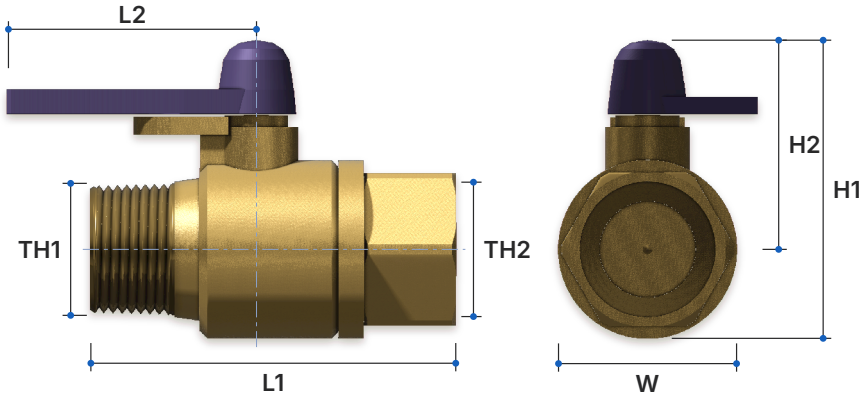



SIZING CHART (MM)

Part No.	L1	L2	H1	H2	W	TH1	TH2
R1925-RLF		62.0			44.5	R 1"	Rp 1"

L1 = overall length. L2 = handle length, spindle centre to handle tip. H1 = overall height, bottom of body to top of handle. H2 = pipe centreline to top of handle. W = body width. TH1 = inlet. TH2 = outlet. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence WM-002005
Certified to AS 4796
Lead Free

SPECIFICATIONS

- Connection **R 1" male (inlet) x Rp 1" female (outlet)**
- Maximum Pressure Rating **1600 kPa (PN16)**
- Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Lockable handle with padlock holes
- Tested and certified to AS 4796

MATERIAL CHART

Part	Material
Body, nut, handle	DR Lead Free Brass (CW511L), lilac handle
Ball and spindle	Stainless steel 316
Ball seats	PTFE
Spindle O-ring	Nitrile rubber

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.