
LOCKABLE BALL VALVE

20mm M x F Straight Lilac (Recycled Water) Lead Fr

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **R1990-RLF**

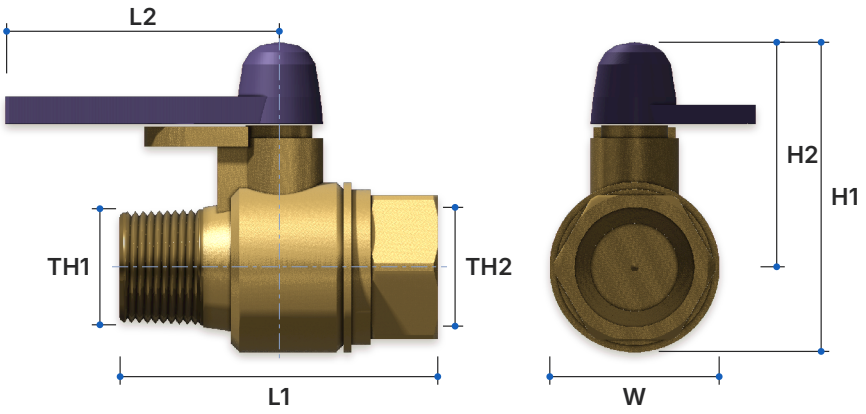



SIZING CHART (MM)

Part No.	L1	L2	H1	H2	W	TH1	TH2
R1990-RLF		62.0			38.5	R 3/4"	Rp 3/4"

L1 = overall length. L2 = handle length, spindle centre to handle tip. H1 = overall height, bottom of body to top of handle. H2 = pipe centreline to top of handle. W = body width. TH1 = inlet. TH2 = outlet. All dimensions in millimetres.

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence WM-002005
Certified to AS 4796
Lead Free

SPECIFICATIONS

Connection **R 3/4" male (inlet) x Rp 3/4" female (outlet)**

Maximum Pressure Rating **1600 kPa (PN16)**

Working Temperature **1°C to 95°C**

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Lockable handle with padlock holes

Tested and certified to AS 4796

MATERIAL CHART

Part	Material
Body, nut, handle	DR Lead Free Brass (CW511L), lilac handle
Ball and spindle	Stainless steel 316
Ball seats	PTFE
Spindle O-ring	Nitrile rubber

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.