
# LOCKABLE BALL VALVE

20mm F x F Right Angle Lilac (Recycled Water) Lead

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **R9020-RLF**

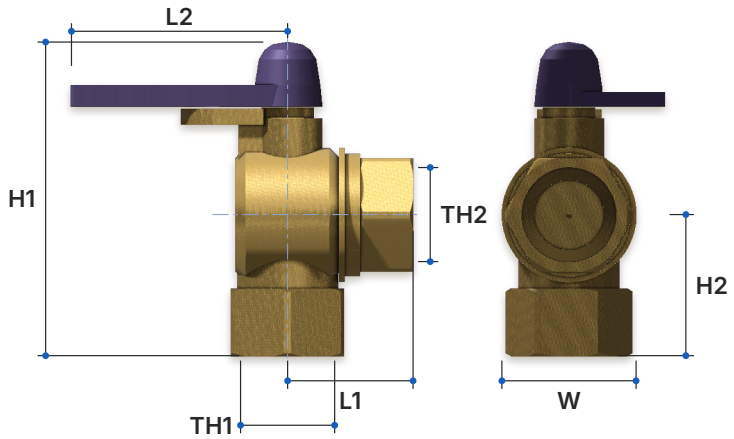





## SIZING CHART (MM)

| Part No. | L1 | L2 | H1 | H2 | W | TH1 | TH2 |
|---|---|---|---|---|---|---|---|
| R9020-RLF | | 62.0 | | 40.5 | 38.5 | Rp 3/4" | Rp 3/4" |

L1 = inlet centreline to outlet face. L2 = handle length, spindle centre to handle tip. H1 = overall height, inlet face to top of handle. H2 = outlet centreline to inlet face. W = body width. TH1 = inlet. TH2 = outlet. All dimensions in millimetres.

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence WM-002005
Certified to AS 4796
Lead Free

## SPECIFICATIONS

Connection **Rp 3/4" female (inlet) x Rp 3/4" female (outlet)**

Maximum Pressure Rating **1600 kPa (PN16)**

Working Temperature **1°C to 95°C**

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Lockable handle with padlock holes
- Tested and certified to AS 4796

## MATERIAL CHART

| Part | Material |
|---|---|
| Body, nut, handle | DR Lead Free Brass (CW511L), lilac handle |
| Ball and spindle | Stainless steel 316 |
| Ball seats | PTFE |
| Spindle O-ring | Nitrile rubber |


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.