
LOCKABLE BALL VALVE

20mm Flare x F Right Angle Lilac (Recycled Water)

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **T9022-RLF**

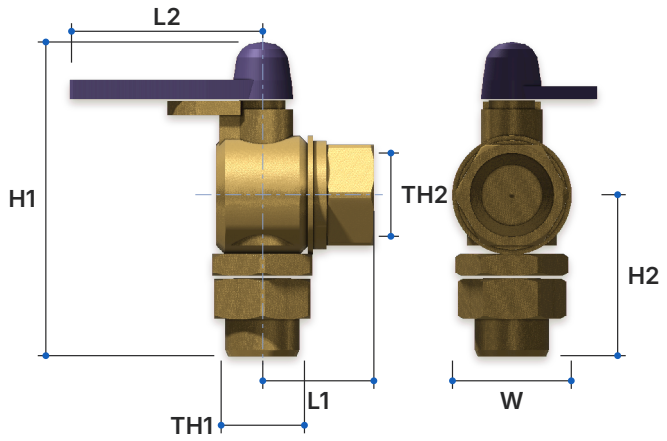



SIZING CHART (MM)

Part No.	L1	L2	H1	H2	W	TH1	TH2
T9022-RLF		62.0			38.5	3/4" flare	Rp 3/4"

L1 = inlet centreline to outlet face. L2 = handle length, spindle centre to handle tip. H1 = overall height, inlet face to top of handle. H2 = outlet centreline to inlet face. W = body width. TH1 = inlet. TH2 = outlet. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence WM-002005
Certified to AS 4796
Lead Free

SPECIFICATIONS

Connection **3/4" flare (G 3/4" with flare nut) (inlet) x Rp 3/4" female (outlet)**

Maximum Pressure Rating **1600 kPa (PN16)**

Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Lockable handle with padlock holes
- Tested and certified to AS 4796

MATERIAL CHART

Part	Material
Body, nut, handle	DR Lead Free Brass (CW511L), lilac handle
Ball and spindle	Stainless steel 316
Ball seats	PTFE

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.