
FLARE ELBOW MALE 60

20mm (3/4") 60° Flare x R 3/4" Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56156LF**

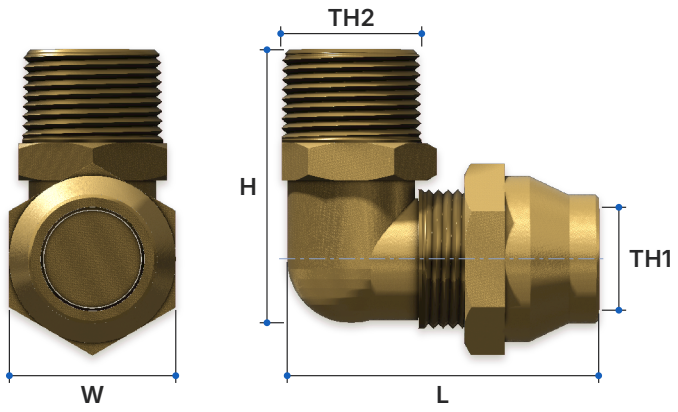



SIZING CHART (MM)

Part No.	L	H	W	TH1	TH2
56156LF		51.2	31.0	3/4" copper tube, 60° flare	R 3/4"

L = back of body to flare nut face, assembled. H = bottom of body to male thread end. W = flare nut across flats. TH1 = flare nut end (copper tube OD). TH2 = male thread. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Connection **3/4" 60° flare (G 3/4" nut) x R 3/4" male**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 60° cone flare seat
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Flare nut	DR Lead Free Brass (CW511L)

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.