
FLARE BODY 45°

10 × 10mm (3/8" x 3/8") Flare x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **LP2712BLF**

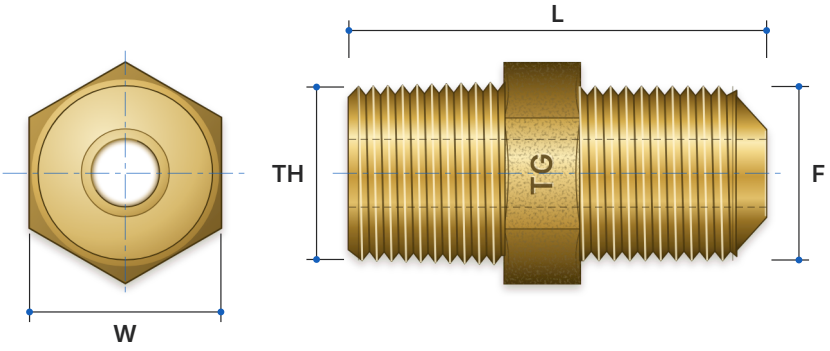



SIZING CHART (MM)

Part No.	L	W	F	TH
LP2712BLF	38.2	17.5	UNF 5/8"	R 3/8"

L = overall length. W = hex across flats. F = UNF flare thread (male). TH = BSPT male thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **3/8" 45° flare (5/8" UNF) x R 3/8" male** (BSPT taper)

MATERIAL CHART

Part	Material
Flare Union	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

SAE 45° flare

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.