
# FLARE BODY 45°

15 × 10mm (1/2" x 3/8") Flare x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **LP2717BLF**

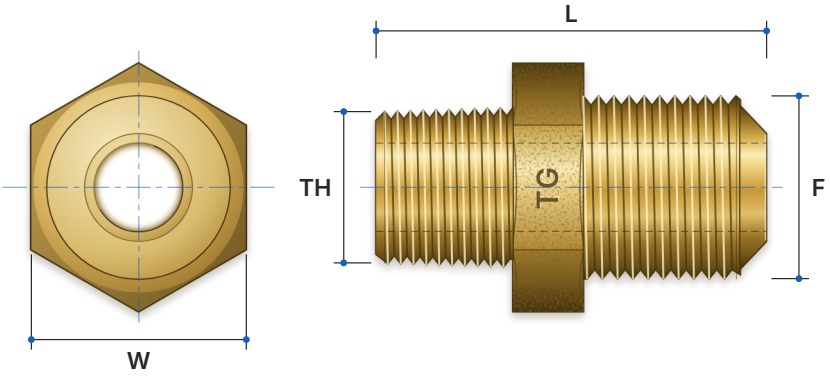





## SIZING CHART (MM)

| Part No. | L | W | F | TH |
|---|---|---|---|---|
| LP2717BLF | 40.7 | 22.4 | UNF 3/4" | R 3/8" |

L = overall length. W = hex across flats. F = UNF flare thread (male). TH = BSPT male thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1/2" 45° flare (3/4" UNF) x R 3/8" male** (BSPT taper)

## MATERIAL CHART

| Part | Material |
|---|---|
| Flare Union | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

SAE 45° flare

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.