
FERRULE BONNET

50mm (2") Square Drive Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71168LF**

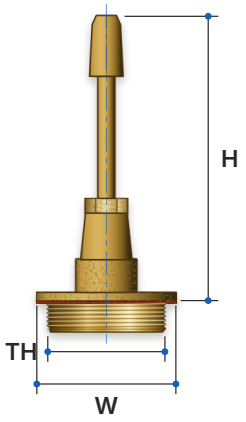



SIZING CHART (MM)

Part No.	H	W	TH
71168LF		78.0	G 2-1/4"

H = top of the square drive to underside of the stuffing box flange (closed). W = stuffing box flange diameter. TH = body thread. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

SPECIFICATIONS

- Body thread **G 2-1/4"**
- Maximum Pressure Rating **1600 kPa**
- Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Tested and certified to AS 3718

MATERIAL CHART

Part	Material
Stuffing box, spindle and gland	DR Lead Free Brass (CW511L)
Jumper valve	DR Lead Free Brass with rubber washer to AS 4020
Body washer	Red fibre

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.