
HOSE COCK

15mm (1/2") x 20mm (3/4") Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71009LF**

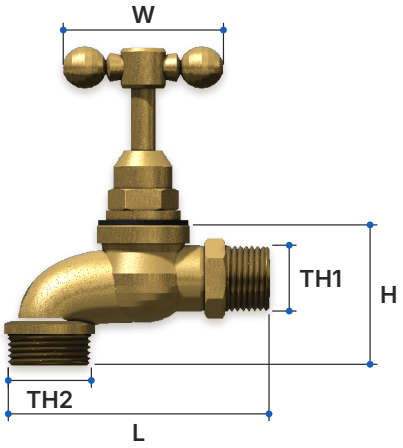



SIZING CHART (MM)

Part No.	L	H	W	TH1	TH2
71009LF	83.0	44.4	51.0	G 1/2"	G 3/4"

L = inlet face to the far side of the outlet. H = top of the bonnet boss to the outlet face. W = handle across. TH1 = inlet (male). TH2 = outlet (male). All dimensions in millimetres.

SPECIFICATIONS

Connection **G 1/2" male inlet x G 3/4" male hose outlet**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Top section (stuffing box, spindle, handle)	DR Lead Free Brass (CW511L)
Jumper valve	Acetal copolymer with rubber washer to AS 4020

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Jumper valve with O-ring sealed spindle
- Tested and certified to AS 3718

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.