
# REDUCING ADAPTOR

32 × 40mm (1¼" x 1½") Male x Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **50024LF**

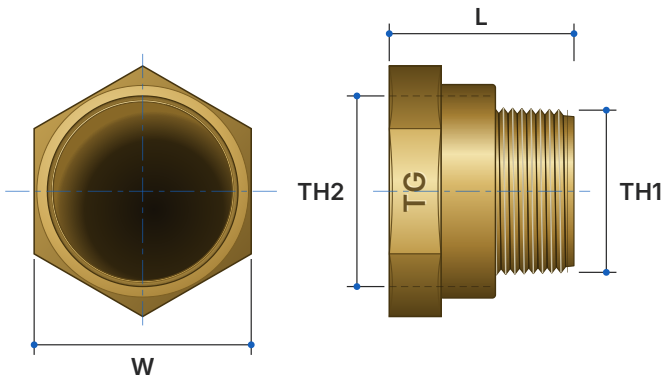





## SIZING CHART (MM)

| Part No. | L | W | TH1 | TH2 |
|---|---|---|---|---|
| 50024LF | 46.3 | 54.4 | R 1-1/4" | Rp 1-1/2" |

L = overall length. W = hex across flats. TH1 = male thread. TH2 = female thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 1-1/4" male x Rp 1-1/2" female**

## MATERIAL CHART

| Part | Material |
|---|---|
| Adaptor | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS ISO 7.1

Tested and certified to AS 3688


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.