
# REDUCING BUSH

40 × 32mm (1½" x 1¼") Male x Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **50069LF**

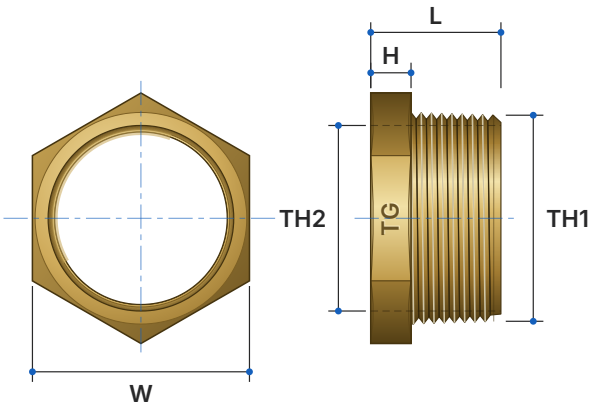





## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 50069LF | 29.4 | 9.1 | 49.0 | R 1-1/2" | Rp 1-1/4" |

L = overall length. H = hex length. W = hex across flats. TH1 = male thread. TH2 = female thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 1-1/2" male x Rp 1-1/4" female**

## MATERIAL CHART

| Part | Material |
|---|---|
| Bush | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS ISO 7.1

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.