
# REDUCING NIPPLE

50 × 40mm (2" x 1½") BSPT Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **50308LF**

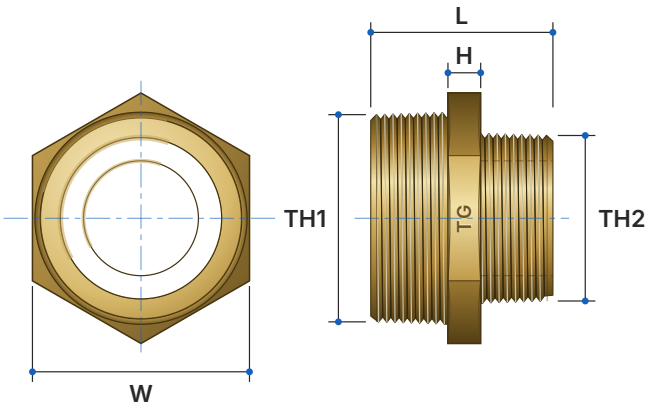




## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 50308LF | 51.2 | 9.2 | 61.0 | R 2" | R 1-1/2" |

L = overall length. H = hex length. W = hex across flats. TH1 = large thread. TH2 = small thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 2" male x R 1-1/2" male** (BSPT taper)

## MATERIAL CHART

| Part | Material |
|---|---|
| Nipple | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS ISO 7.1
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.