
# LUGGED FLARE ELBOW

15mm (1/2") 60° Flare x G 1/2" Male

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56151**

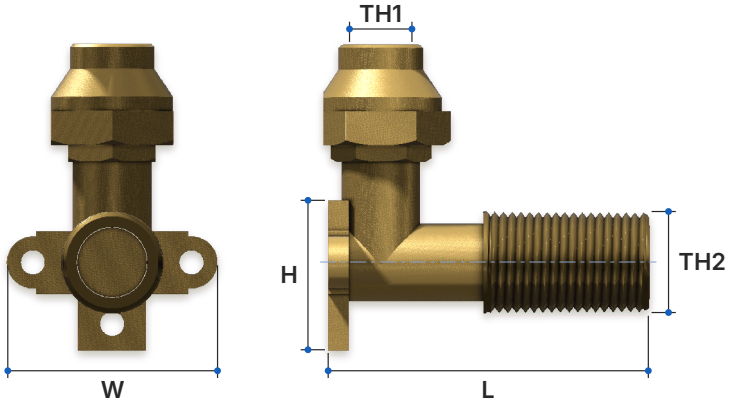




## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 56151 | | | 43.5 | 1/2" copper tube, 60° flare | G 1/2" |

L = back of wall plate to male thread end, assembled. H = wall plate height. W = wall plate width. TH1 = flare nut end (copper tube OD). TH2 = male thread. All dimensions in millimetres.

## SPECIFICATIONS

Connection **1/2" 60° flare (G 1/2" nut) x G 1/2" male**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Brass (C48600) |
| Flare nut | DR Brass (C48600) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Approved
- DR Brass (C48600) to AS 2345
- 60° cone flare seat
- Lugged wall plate, three 5.0 holes
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.