
SUB METER KIT


20mm NSW Extendable Coupling Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **SUB2585LF**

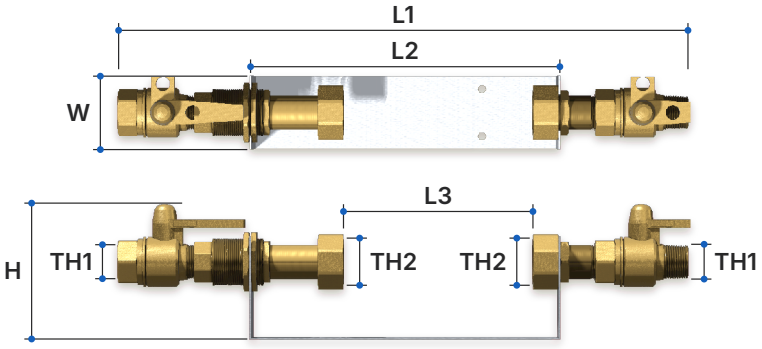

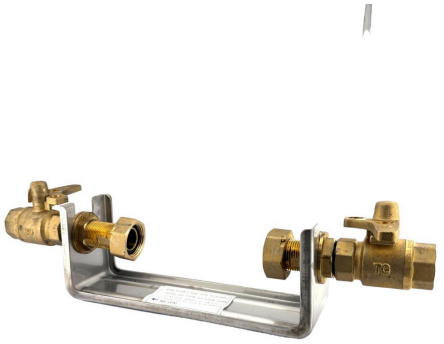

SIZING CHART (MM)

Part No.	L1	L2	L3	H	W	TH1	TH2
SUB2585LF		240.0	147.0	105.0	57.0	R/Rp 3/4"	36.6mm/14 TPI

L1 = overall length, valve end to valve end. L2 = bracket length. L3 = meter gap, nut face to nut face. H = underside of the bracket to top of the handles. W = bracket width. TH1 = ball valve end connections. TH2 = meter nut thread. All dimensions in millimetres.

FEATURES

- Complete kit: two lockable ball valves, meter connectors and 304 stainless bracket
- DR Lead Free Brass (CW511L) to AS 2345
- Pressure tested after assembly

SPECIFICATIONS

- Connection **R/Rp 3/4" valve ends (R 3/4" male one end, Rp 3/4" female the other) x 36.6mm/14 TPI meter nuts (NSW)**
- Working Temperature **1°C to 95°C**

MATERIAL CHART

Part	Material
Ball valves	DR Lead Free Brass (CW511L)
Meter connectors and back nuts	DR Lead Free Brass (CW511L)
Bracket	Stainless steel 304

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.