
TPFNR FERRULE COCK

20 × 25mm Male x Poly Bonnet Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **R11081LF**

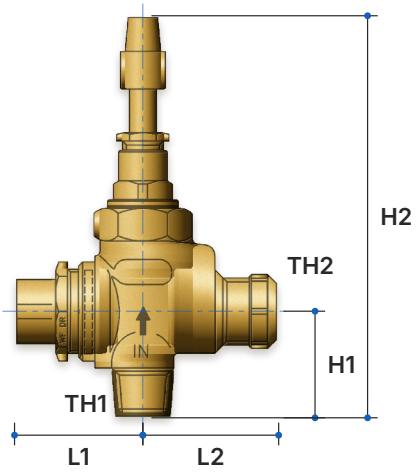



SIZING CHART (MM)

Part No.	L1	L2	H1	H2	W	TH1	TH2
R11081LF			50.0			R 3/4"	

L1 = tapping port face to centreline. L2 = centreline to outlet face. H1 = outlet centreline to inlet end. H2 = overall height. W = body width. All dimensions in millimetres.

SPECIFICATIONS

Connection **R 3/4" male (inlet) x 25mm poly compression (outlet)**

Test pressure **1500 kPa**

Working Temperature **1°C to 95°C**

MATERIAL CHART

Part	Material
Body	Lead Free Gunmetal
Bonnet (top section)	71164LF (DR Lead Free Brass)
Tapping port plug	Plastic cap insert
Bush / washers	Brass / fibre

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- Lead Free Gunmetal body
- Tapping Pressure Ferrule No Return
- Suits live (hot) tapping
- Tested and certified to AS 3718

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.