
# HOSE COCK

15mm (1/2") x 20mm (3/4") Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71009LF**

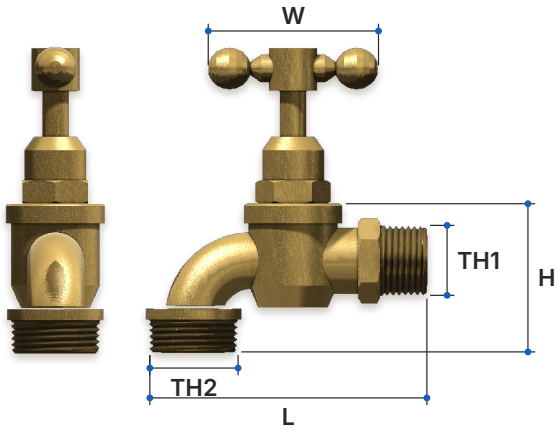




## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 71009LF | 83.0 | 44.4 | 51.0 | G 1/2" | G 3/4" |

L = inlet face to the far side of the outlet. H = top of the bonnet boss to the outlet face. W = handle across. TH1 = inlet (male). TH2 = outlet (male). All dimensions in millimetres.

## SPECIFICATIONS

Connection **G 1/2" male inlet x G 3/4" male hose outlet**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Lead Free Brass (CW511L) |
| Top section (stuffing box, spindle, handle) | DR Lead Free Brass (CW511L) |
| Jumper valve | Acetal copolymer with rubber washer to AS 4020 |

## STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Jumper valve with O-ring sealed spindle
- Tested and certified to AS 3718


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.