
# LUGGED ELBOW NO.19

16mm (5/8") Tube x G 1/2" Male

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52402**

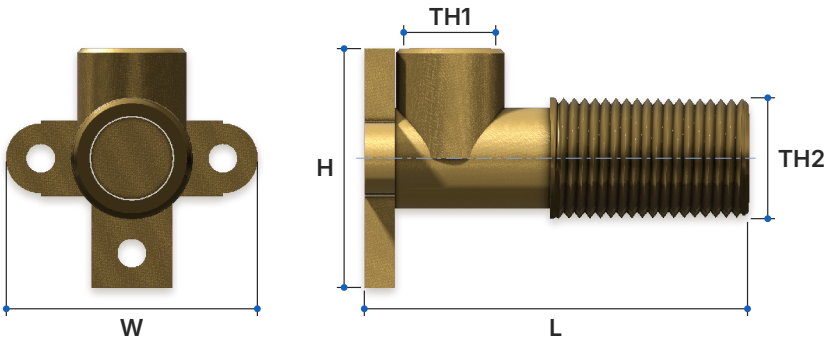




## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 52402 | 66.4 | 41.4 | 43.5 | 5/8" copper tube | G 1/2" |

L = back of wall plate to thread end. H = wall plate height. W = wall plate width. TH1 = capillary socket for copper tube. TH2 = male thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **5/8" copper tube (capillary) x G 1/2" male**

## MATERIAL CHART

| Part | Material |
|---|---|
| Lugged Elbow | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS 1722.2

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.