
# FERRULE BEND

32mm Male BSP / Capillary Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **FG00604LF**

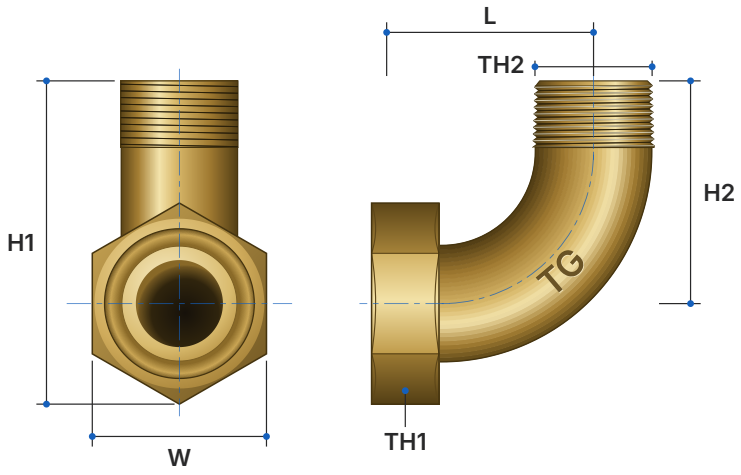





## SIZING CHART (MM)

| Part No. | L | H1 | H2 | W | TH1 | TH2 |
|---|---|---|---|---|---|---|
| FG00604LF | 71.5 | 112 | 77 | 60.2 | G 1-3/4" | R 1-1/4" |

L = outlet face to inlet centre. H1 = overall height (inlet face to nut corner). H2 = inlet face to outlet centre. W = nut across flats. TH1 = nut thread. TH2 = inlet thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **R 1-1/4" male x G 1-3/4" nut** (32 mm capillary inside)

## MATERIAL CHART

| Part | Material |
|---|---|
| Bend | DR Lead Free Brass (CW511L) |
| Nut | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 100% pressure tested
- Threads to AS ISO 7.1 and AS 1722.2
- Tested and certified to AS 3688


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.