
# REDUCING SOCKET

20 × 10mm (3/4" x 3/8") BSP Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **50384LF**

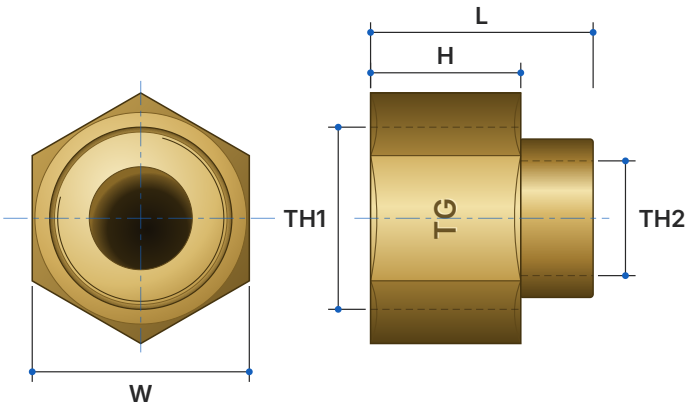





## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 50384LF | 32.3 | 21.8 | 31.5 | G 3/4" | G 3/8" |

L = overall length. H = hex length. W = hex across flats. TH1 = large female thread. TH2 = small female thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **G 3/4" female x G 3/8" female** (BSP parallel)

## MATERIAL CHART

| Part | Material |
|---|---|
| Socket | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS 1722.2

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.