
COMPRESSION UNION M

15mm (1/2") Compression x Male, nylon olive, Lead

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **54030LF**

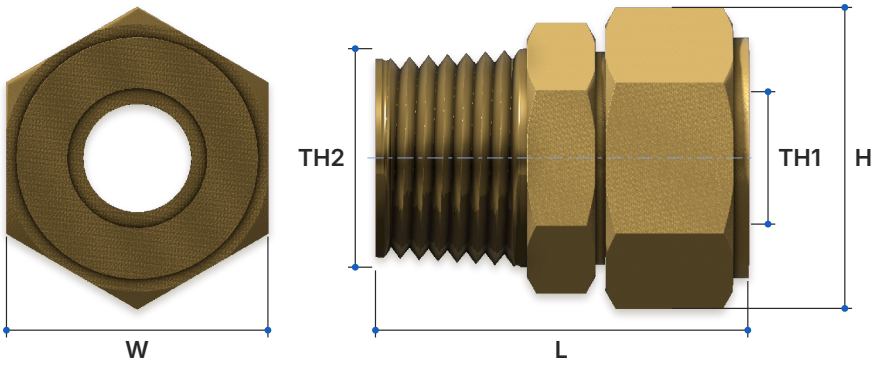



SIZING CHART (MM)

Part No.	L	H	W	TH1	TH2
54030LF		28.9	25.0	1/2" copper tube	R 1/2"

L = overall length assembled. H = height of the largest hex, across corners. W = largest hex across flats (body hex or compression nut). TH1 = tube end. TH2 = other end. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence WM-002387
Certified to AS 3688
Lead Free

SPECIFICATIONS

- Connection **1/2" copper tube x R 1/2" male**
- Maximum Pressure Rating **1600 kPa**
- Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Nylon olive included
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Compression nut	DR Lead Free Brass (CW511L)
Olive	Nylon

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.