# FLARE UNION 45°


15mm (1/2") Flare x G 1/2" Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **LP2813LF**



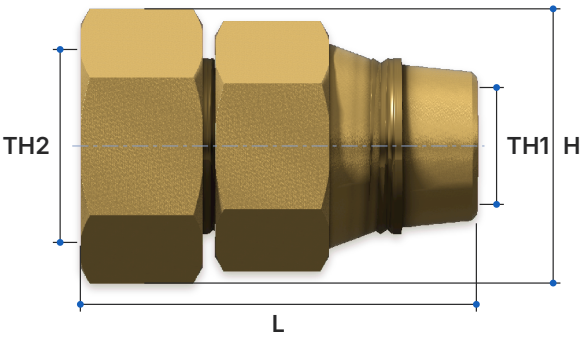





## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| LP2813LF | | 29.8 | 25.8 | 1/2" copper tube, 45° flare | G 1/2" |

L = overall length assembled. H = overall height (largest hex across corners). W = largest hex across flats. TH1 = flare nut end (copper tube OD). TH2 = other end. All dimensions in millimetres.

## SPECIFICATIONS

Connection **1/2" 45° flare (UNF 3/4") x G 1/2" female**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Lead Free Brass (CW511L) |
| Flare nut | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- SAE 45° flare
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.