
FERRULE BEND

32mm (1¼") Flare Compression Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **FG00614LF**

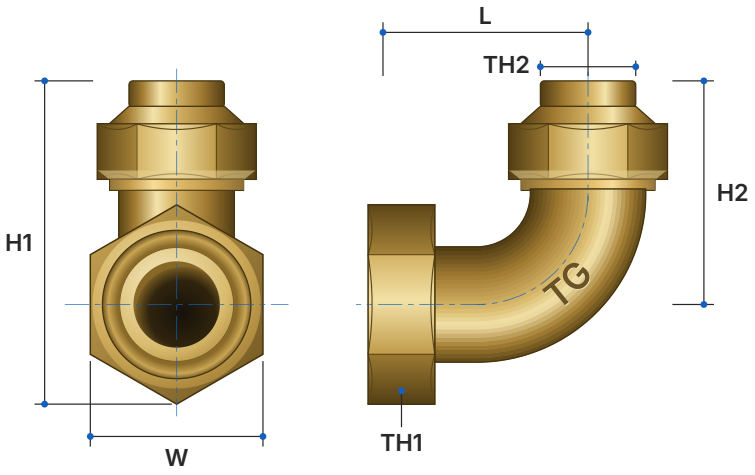



SIZING CHART (MM)

Part No.	L	H1	H2	W	TH1	TH2
FG00614LF	71.5	113	78	60.2	G 1-3/4"	G 1-1/4" flare

L = outlet face to inlet centre. H1 = overall height (inlet face to nut corner). H2 = inlet face to outlet centre. W = nut across flats. TH1 = nut thread. TH2 = inlet flare connection. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **G 1-1/4" flare x G 1-3/4" nut**

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

100% pressure tested

Threads to AS 1722.2

Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Bend	DR Lead Free Brass (CW511L)
Nut	DR Lead Free Brass (CW511L)

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.