
LUGGED ELBOW NO.19

16mm (5/8") Tube x G 1/2" Male

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52402**

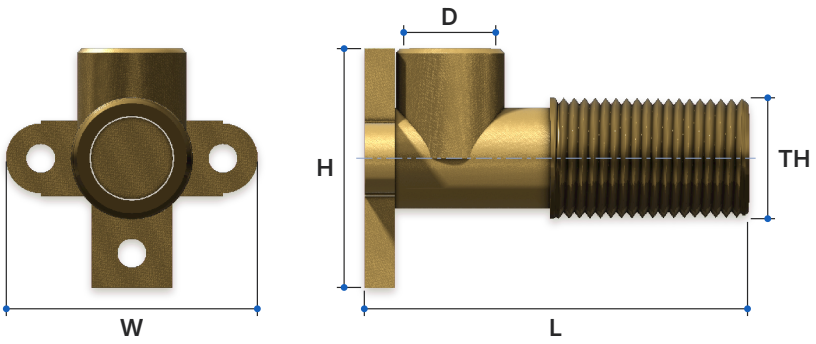



SIZING CHART (MM)

Part No.	L	H	W	D	TH
52402	66.4	41.4	43.5	15.90 - 16.00	G 1/2"

L = back of wall plate to thread end. H = wall plate height. W = wall plate width. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **5/8" copper tube (capillary) x G 1/2" male**

MATERIAL CHART

Part	Material
Lugged Elbow	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to
Lead Free

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS 1722.2

Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.