
ELBOW NO.13

40mm (1½") Tube x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52376LF**

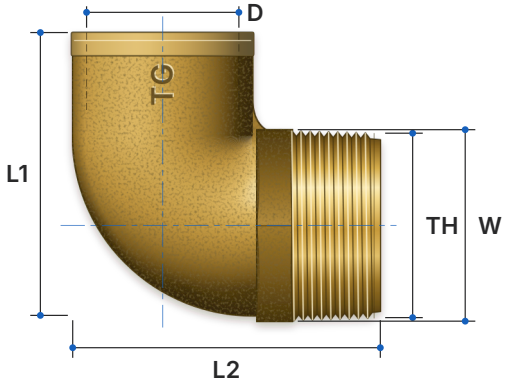



SIZING CHART (MM)

Part No.	L1	L2	W	D	TH
52376LF	71.2	77.4	48.2	38.12 - 38.32	R 1-1/2"

L1 = socket face to back of the male leg. L2 = male end to back of the socket leg. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1½" OD copper (capillary) x R 1-1/2" male** (BSPT taper)

FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Threads to AS ISO 7.1

Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Elbow	DR Lead Free Brass (CW511L)

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.