
ELBOW NO.13

50mm (2") Tube x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52377LF**

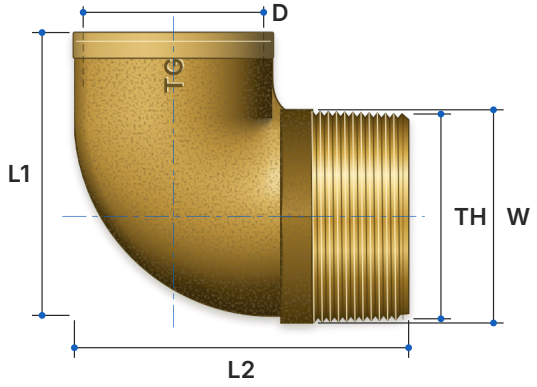



SIZING CHART (MM)

Part No.	L1	L2	W	D	TH
52377LF	80.0	94.5	60.3	50.82 - 51.02	R 2"

L1 = socket face to back of the male leg. L2 = male end to back of the socket leg. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence WMKA02551
Certified to AS 3688
Lead Free

SPECIFICATIONS

- Working Temperature **1°C to 95°C**
- Maximum Pressure Rating **1600 kPa**
- Connection **2" OD copper (capillary) x R 2" male** (BSPT taper)

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS ISO 7.1
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Elbow	DR Lead Free Brass (CW511L)

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.