
# DOUBLE HOSE COCK

15mm (1/2") x 20mm (3/4") Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71018LF**

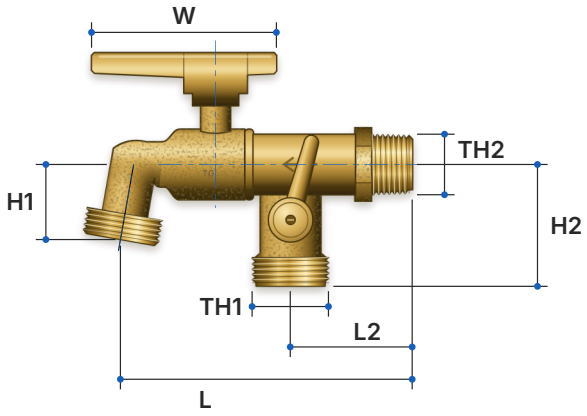





## SIZING CHART (MM)

| Part No. | L | L2 | H1 | H2 | W | TH1 | TH2 |
|---|---|---|---|---|---|---|---|
| 71018LF | 101.0 | 42.2 | 26.0 | 42.2 | 64.0 | G 3/4" | R 1/2" |

L = main outlet face centre to inlet face. L2 = second outlet centre to inlet face. H1 / H2 = inlet centreline to main / second outlet face. W = main lever length. TH1 = outlets (male hose). TH2 = inlet (male taper). All dimensions in millimetres.

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

## SPECIFICATIONS

Connection **R 1/2" male inlet x 2 x G 3/4" male hose outlets**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Two outlets, each with its own quarter-turn ball valve
- Tested and certified to AS 3718

## MATERIAL CHART

| Part | Material |
|---|---|
| Body, balls and handles | DR Lead Free Brass (CW511L) |
| Ball seats | PTFE |
| Spindle O-rings | Nitrile rubber |


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.