
DOUBLE HOSE COCK

20mm (3/4") x 25mm (1") Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71024LF**

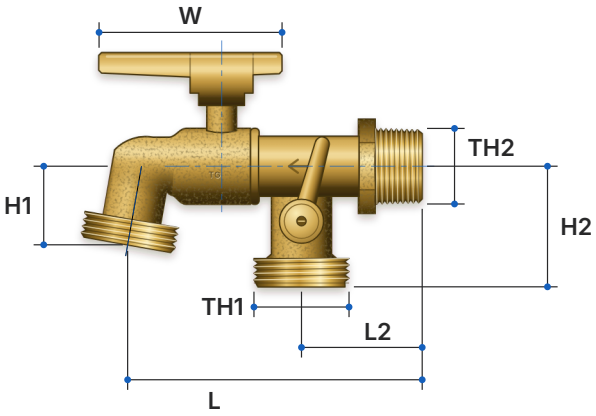



SIZING CHART (MM)

Part No.	L	L2	H1	H2	W	TH1	TH2
71024LF	103.0	42.2	27.5	42.2	64.0	G 1"	R 3/4"

L = main outlet face centre to inlet face. L2 = second outlet centre to inlet face. H1 / H2 = inlet centreline to main / second outlet face. W = main lever length. TH1 = outlets (male hose). TH2 = inlet (male taper). All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

SPECIFICATIONS

Connection **R 3/4" male inlet x 2 x G 1" male hose outlets**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Two outlets, each with its own quarter-turn ball valve
- Tested and certified to AS 3718

MATERIAL CHART

Part	Material
Body, balls and handles	DR Lead Free Brass (CW511L)
Ball seats	PTFE
Spindle O-rings	Nitrile rubber

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.