
TEST DATA SHEET

Description: Polarization Insensitive
Optical Circulator

Part Number: FCIR15503P02212
S/N:26060978

Parameters		Unit	Specification	Test Data
Operating wavelength		nm	1550	1550
Bandwidth		nm	±30	±30
Max.Insertion Loss	Port1-Port2	dB	1.1	0.65
	Port2-Port3		1.1	0.72
Min.Isolation	Port2-Port1	dB	40	59
	Port3-Port2		40	60
Max.PDL		dB	0.15	0.03/0.06
Min.Directivity（Port1-Port3）		dB	50	63
Min.Return Loss		dB	50	65
Connector type			FC/APC	
Fiber Type			SMF-28e	
Pigtail Type			900um loose tube	
Fiber Length		m	1.0	
Max. Power Handling (CW)		mW	500	
Max. Tensile Load		N	5	
Operating Temperature		℃	-5 to +70	
Storage Temperature		℃	-40 to +85	
Dimensions		mm	φ5.5×L50	

Package Dimensions:

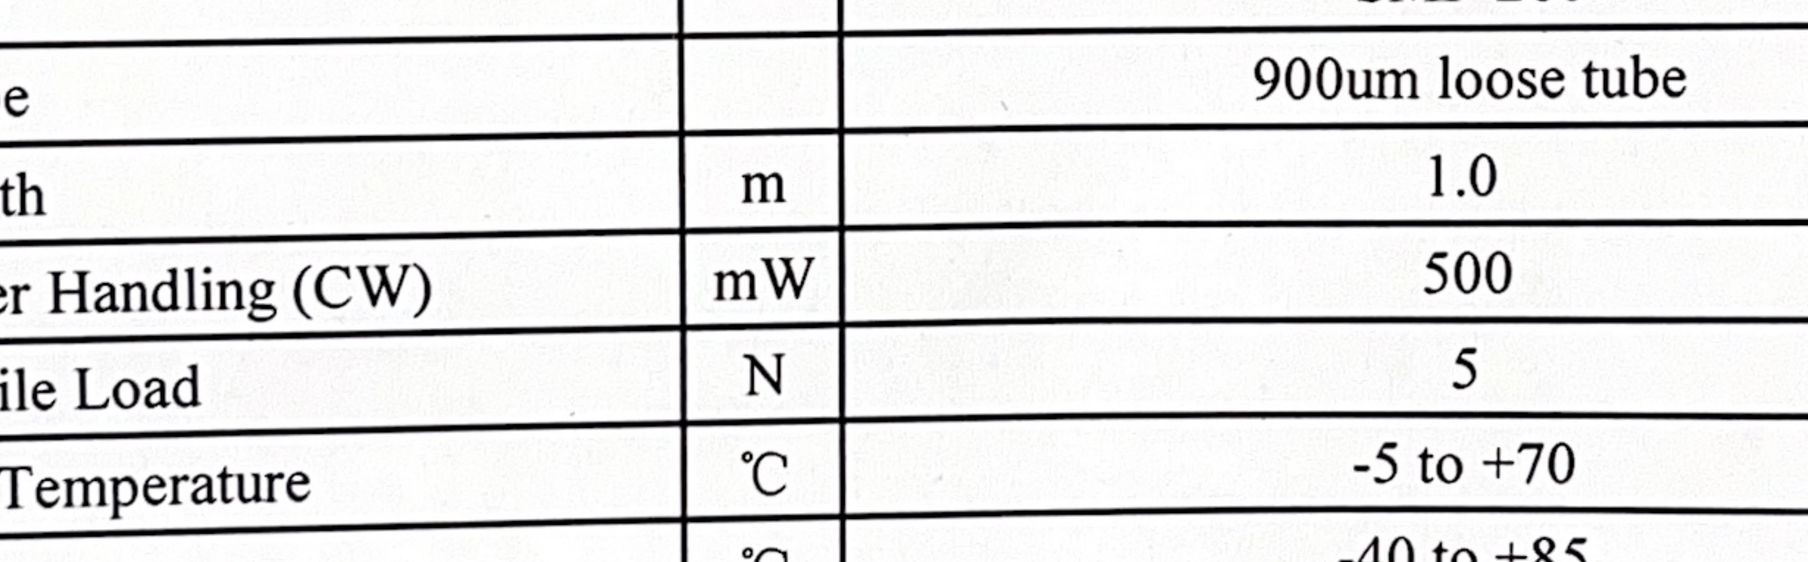

Tested By: ZhangPeng

Reviewed by: YanYan

Date: 2026-8-3

QC
06

Test Report

Product Name:	1550nm DFB Laser	Test By:	03
P/N:	BFLD-1550-20SM-FA2	Test Date:	2026/8/21

Temperature: 25℃(15~35℃)


Wavelength range: 1550 ± 2nm

Output power range: ≥ 20mW


Operating current < 100mA

Pigtail type: SM fiber; FC/APC connector

S/N	TX							
	Center wavelength	Operating current	Threshold current	Bias voltage	Monitor PD currnet	SMSR	TEC Voltage	TEC Current
	λp(nm)	Io(mA)	I_{TH}(mA)	Vf(V)	Im(uA)	SMSR(dB)	V_{TEC}(mV)	I_{TEC}(mA)
2630553009	1550.13	58.07	4.86	1.46	290.00	50.683	50.00	120.00

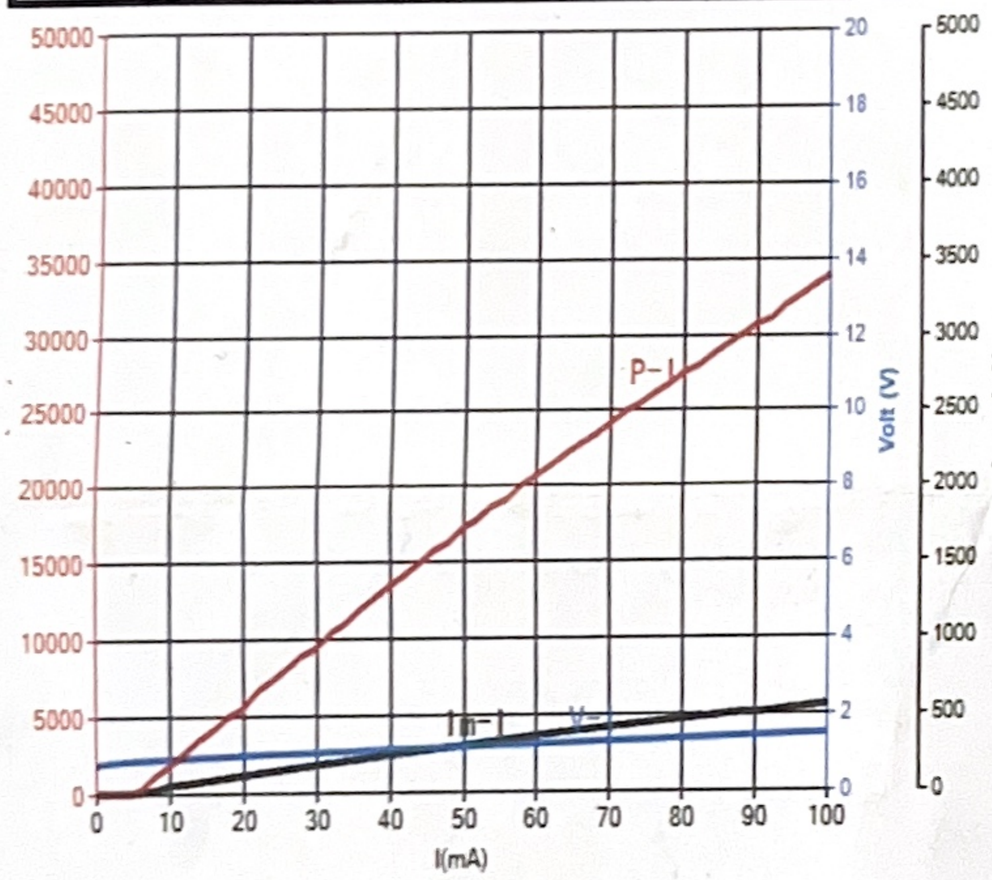


PIV Curve

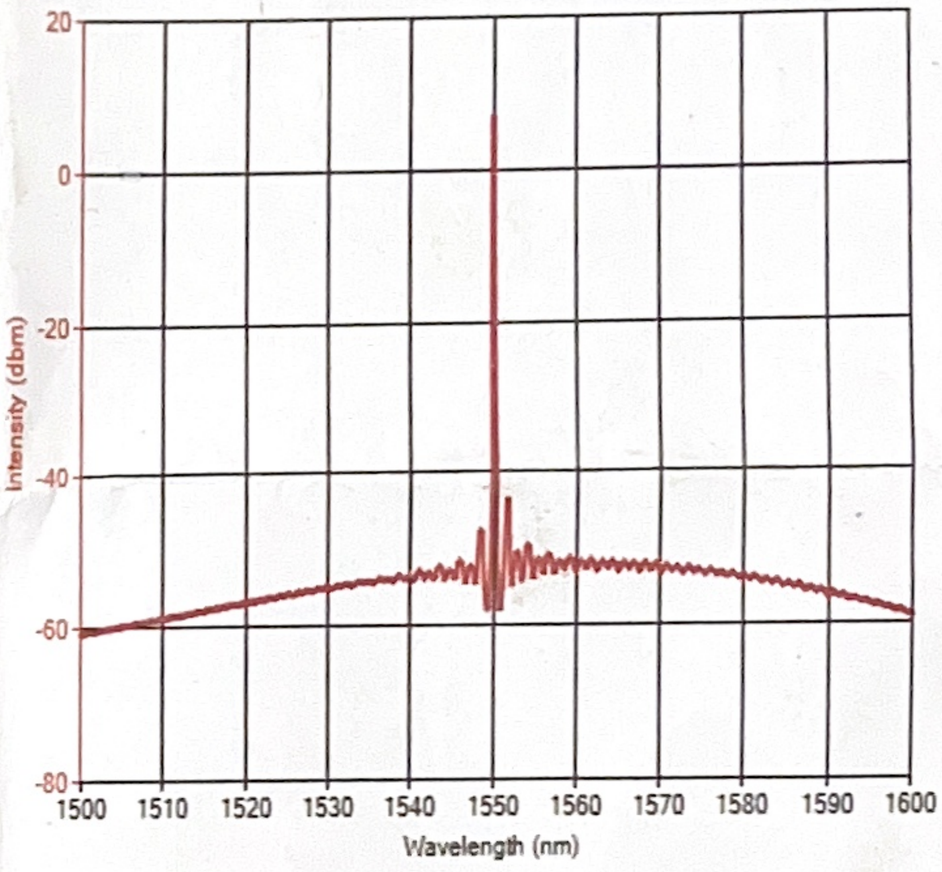

Optical mapping

PIN Definition:

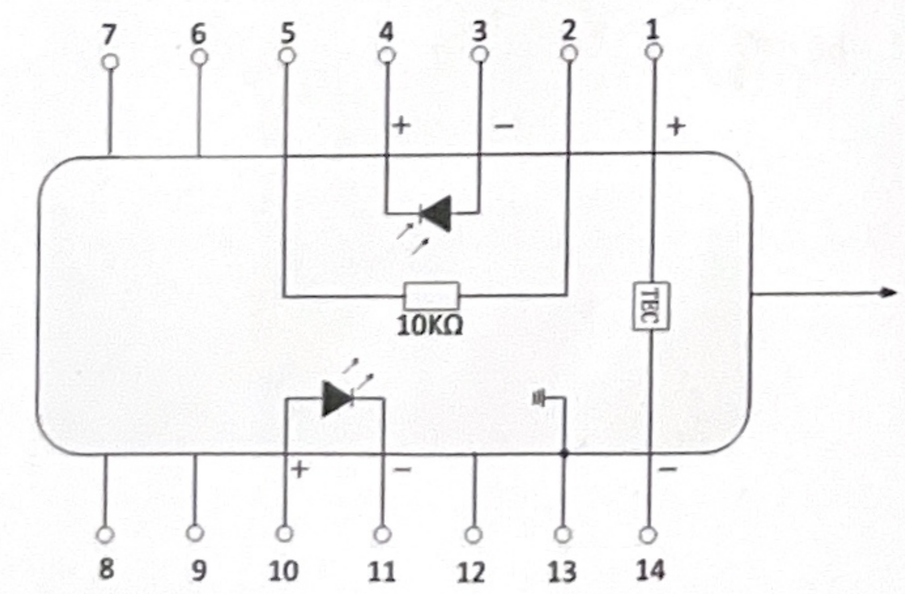

1	TEC(+)	14	TEC(–)
2	Thermistor	13	Case Ground
3	PD Monitor Anode (-)	12	NC
4	PD Monitor cathode(+)	11	Laser Cathode (-)
5	Thermistor	10	Laser Anode (+)
6	NC	9	NC
7	NC	8	NC

Attention notes


1. The electric sensitive element，please obey the static sensitive element protection
2. Pins is easy to break，please don't bend it for big angle.
3. The fiber is easy to break，when bend the fiber, the radius must is up to 20mm;
4. Ensure the plane of fiber connection is clean, which will influence the function of module.

Dual Window Coupler Test Report

S/N: 20260729020

TESTING ENVIRONMENT: Temperature: 23℃±2℃. Relative Humidity： 60%±10%					
TYPE		**SM-FBT-1*2-10/90**			
Test Wavelength	nm	1550±15			
OutPut		1550nm			
		Out1	Out2	Out1	Out2
Insertion Loss	dB	0.59	10.82		
Coupling Ratio	%	91.33%	8.67%		
PDL	dB	≤0.15			
Directional	dB	≥55			
Operating Temperature	℃	-20～+75			
Storage Temperature	℃	-40～+85			
Fiber Length	m	1			
Dimension	mm	90*20*10			
Fiber Type		SM-28e、0.9mm			
Power Handling	mw	≤300			
Connector		FC/APC			

Dimension Diagram:

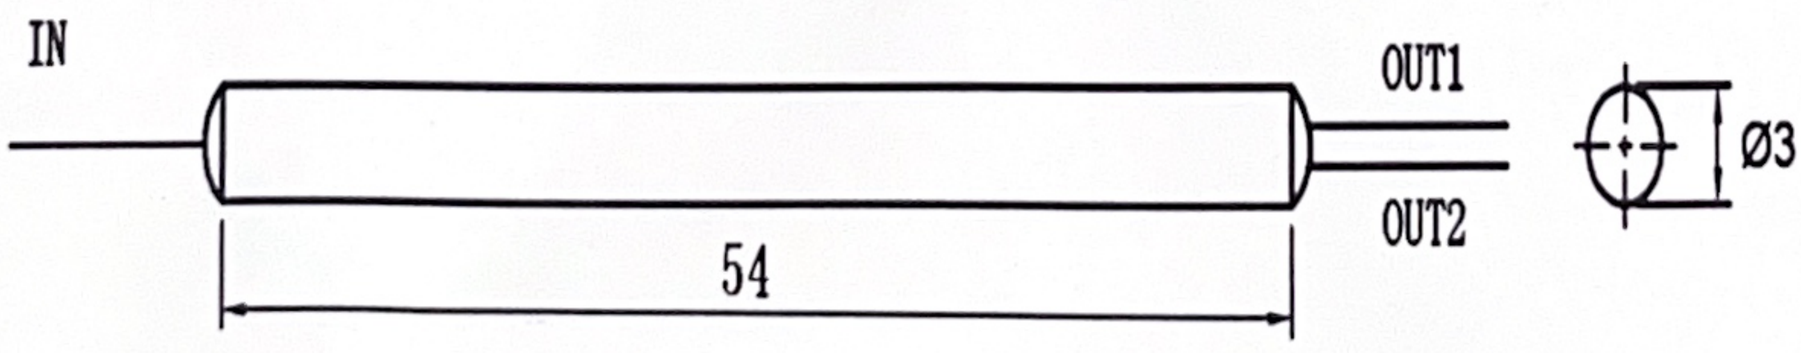

INSPECTOR:Li Fang

QC:

DATE:2026.09.04

Dual Window Coupler Test Report

S/N: 20260904001

TESTING ENVIRONMENT: Temperature: 23℃±2℃. Relative Humidity： 60%±10%					
TYPE		**SM-FBT-2*2-50/50**			
Test Wavelength	nm	1550±15			
OutPut		1550nm		1550nm	
		Out1	Out2	Out1	Out2
Insertion Loss	dB	3.85	3.83	3.79	3.88
Coupiing Ratio	%	49.92%	50.08%	50.53%	49.47%
PDL	dB	≤0.15			
Directional	dB	≥55			
Operating Temperature	℃	-20～+75			
Storage Temperature	℃	-40～+85			
Fiber Length	m	1			
Dimension	mm	¢54*30			
Fiber Type		SM-28e,0.9mm			
Power Handling	mw	≤300			
Connector		FC/APC			