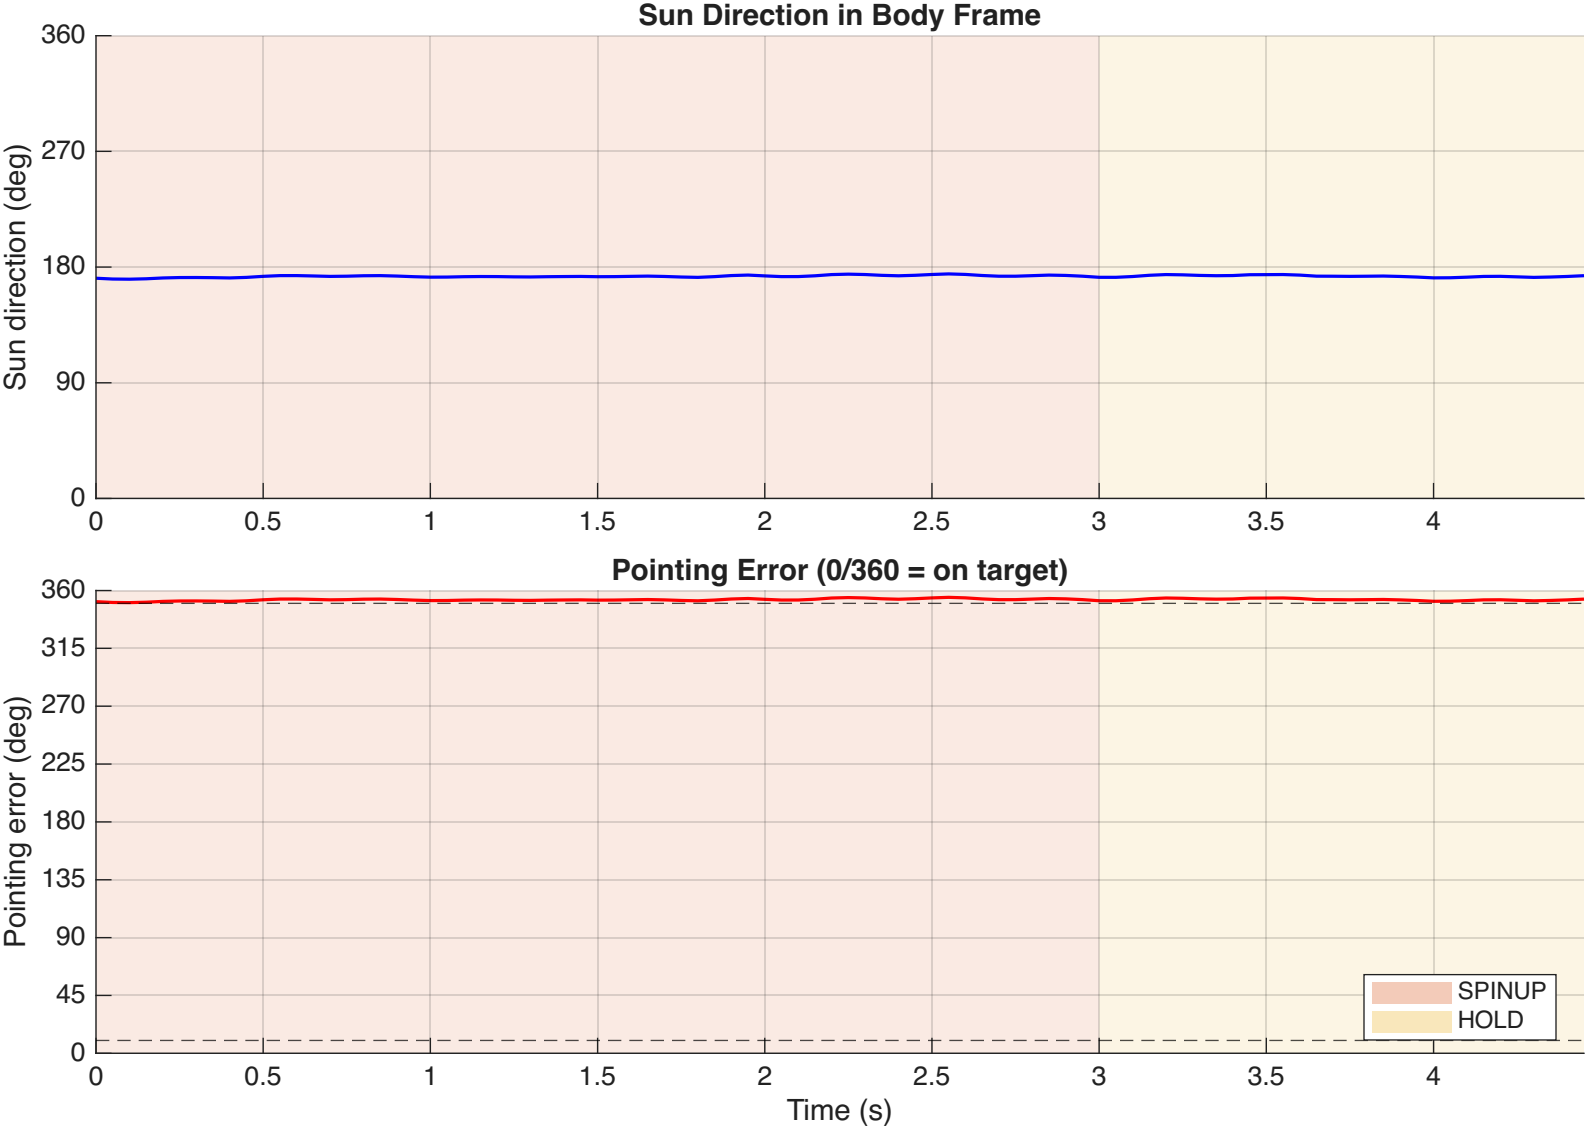
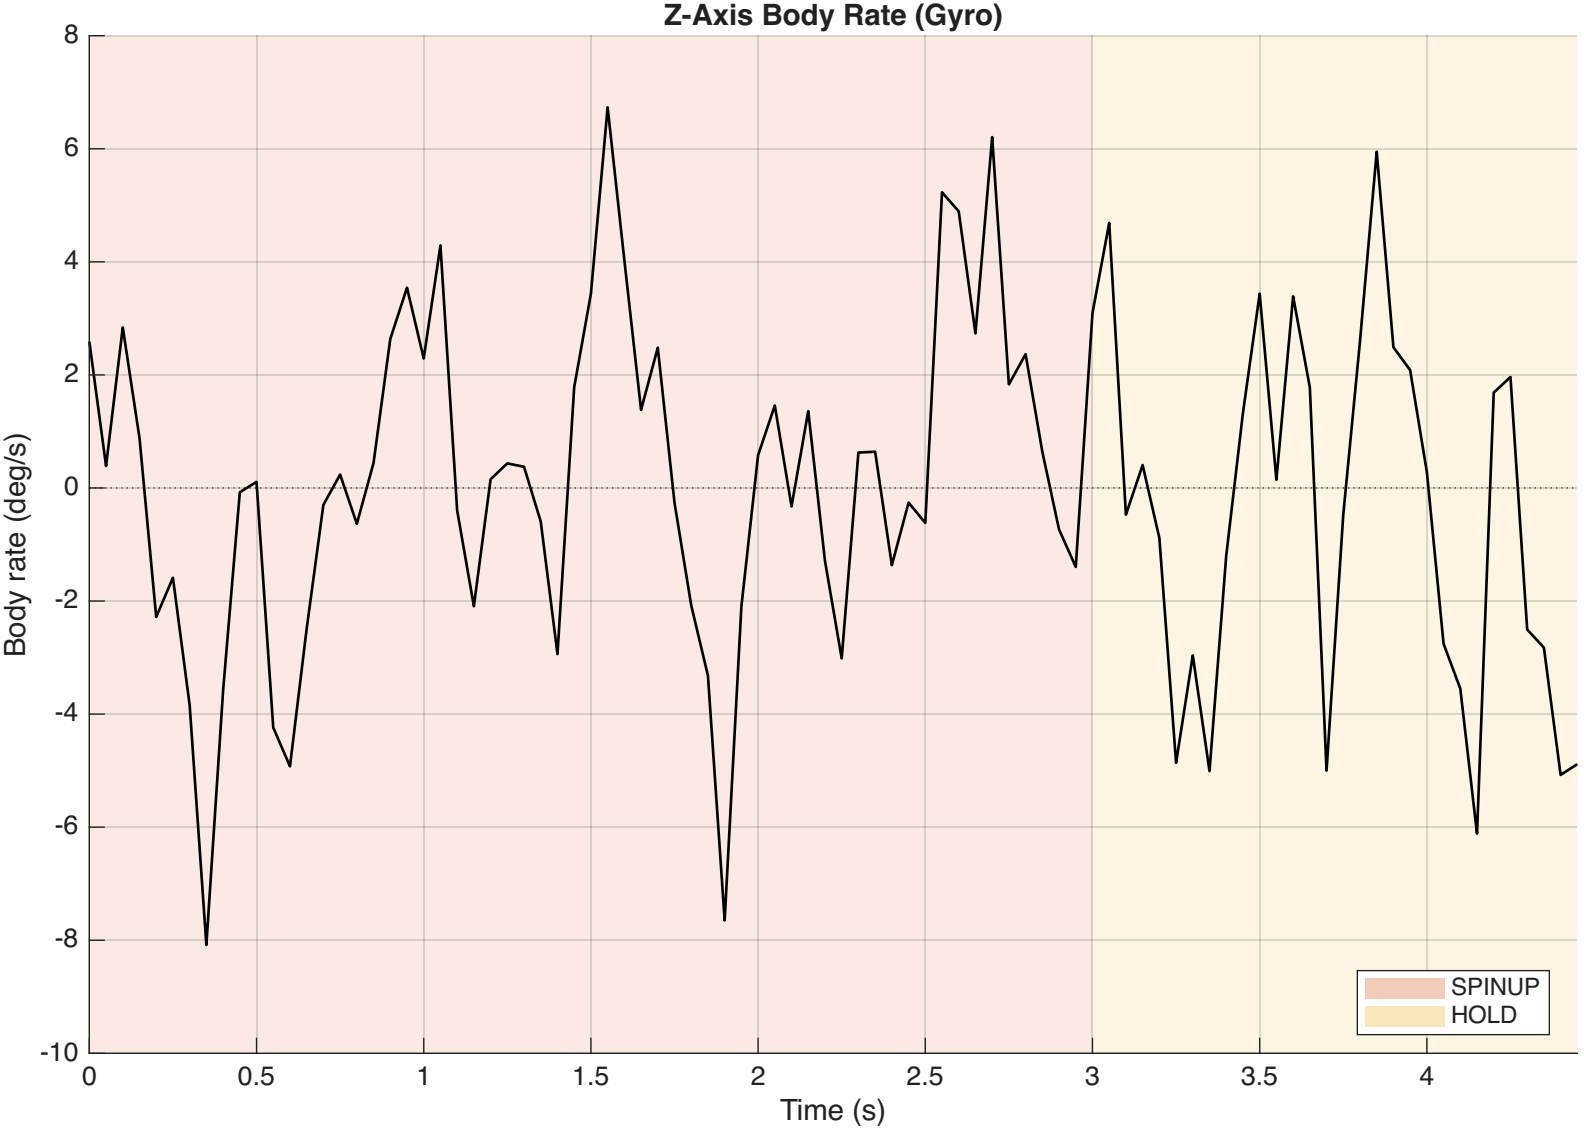
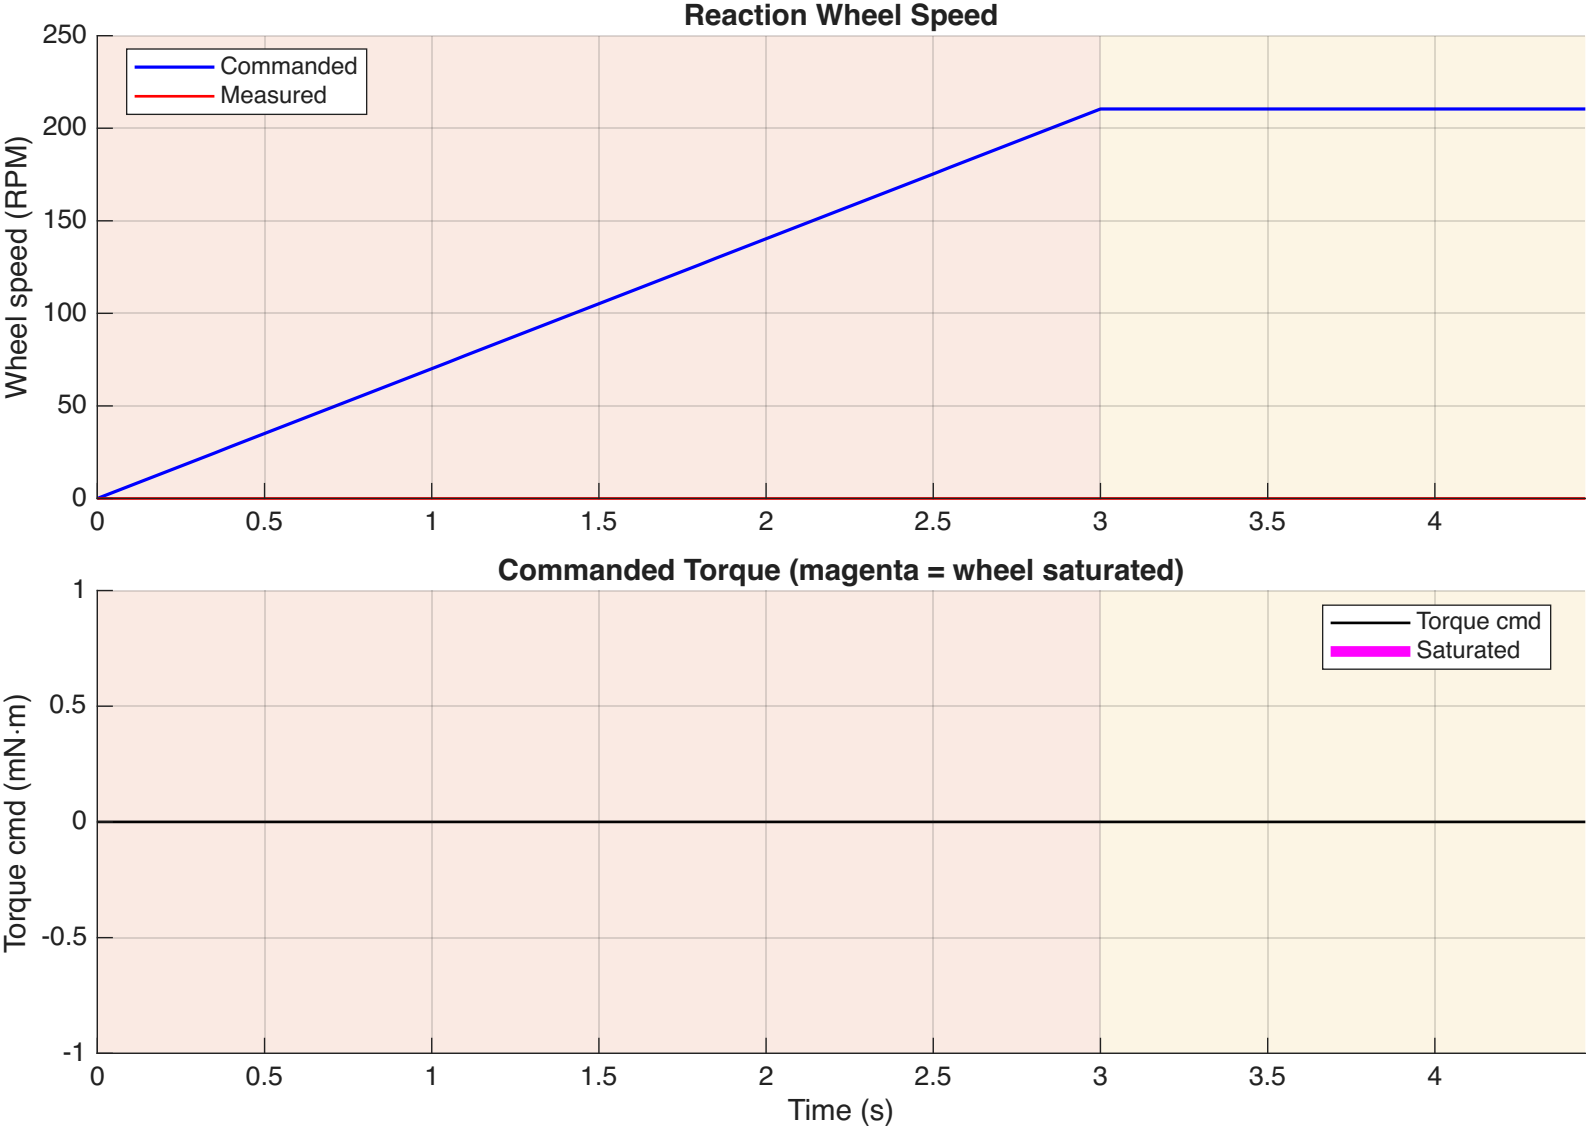
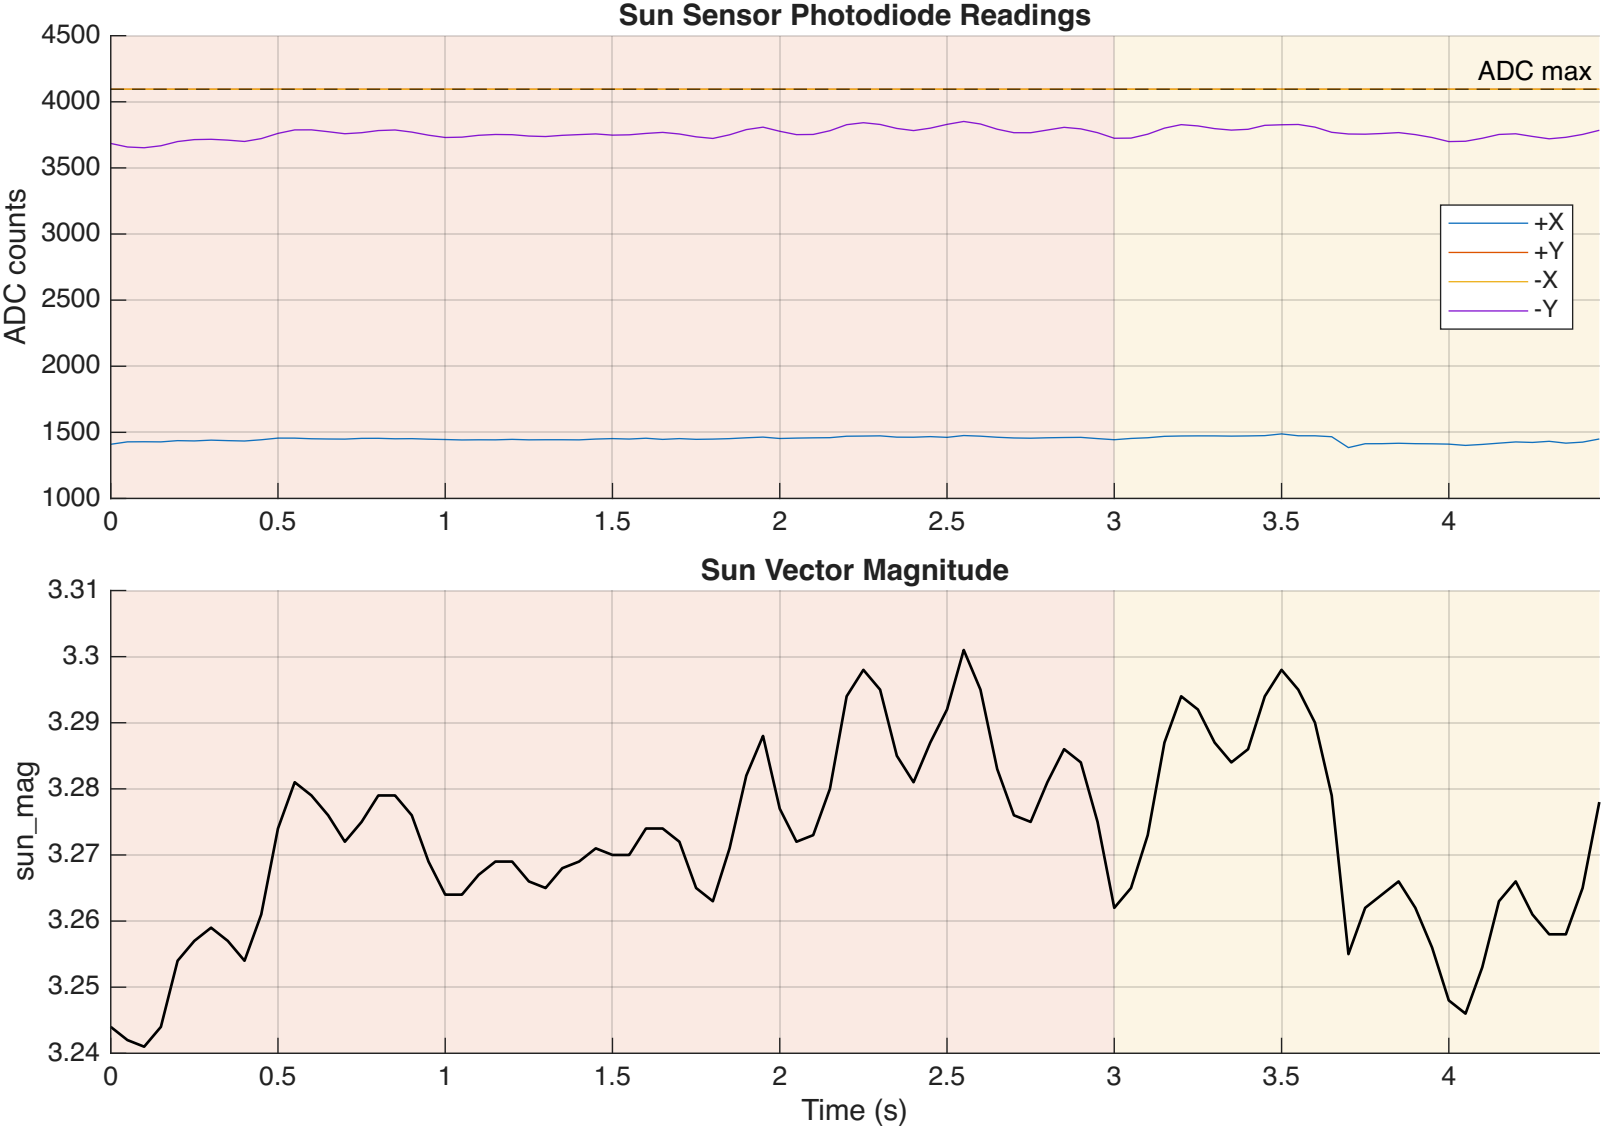
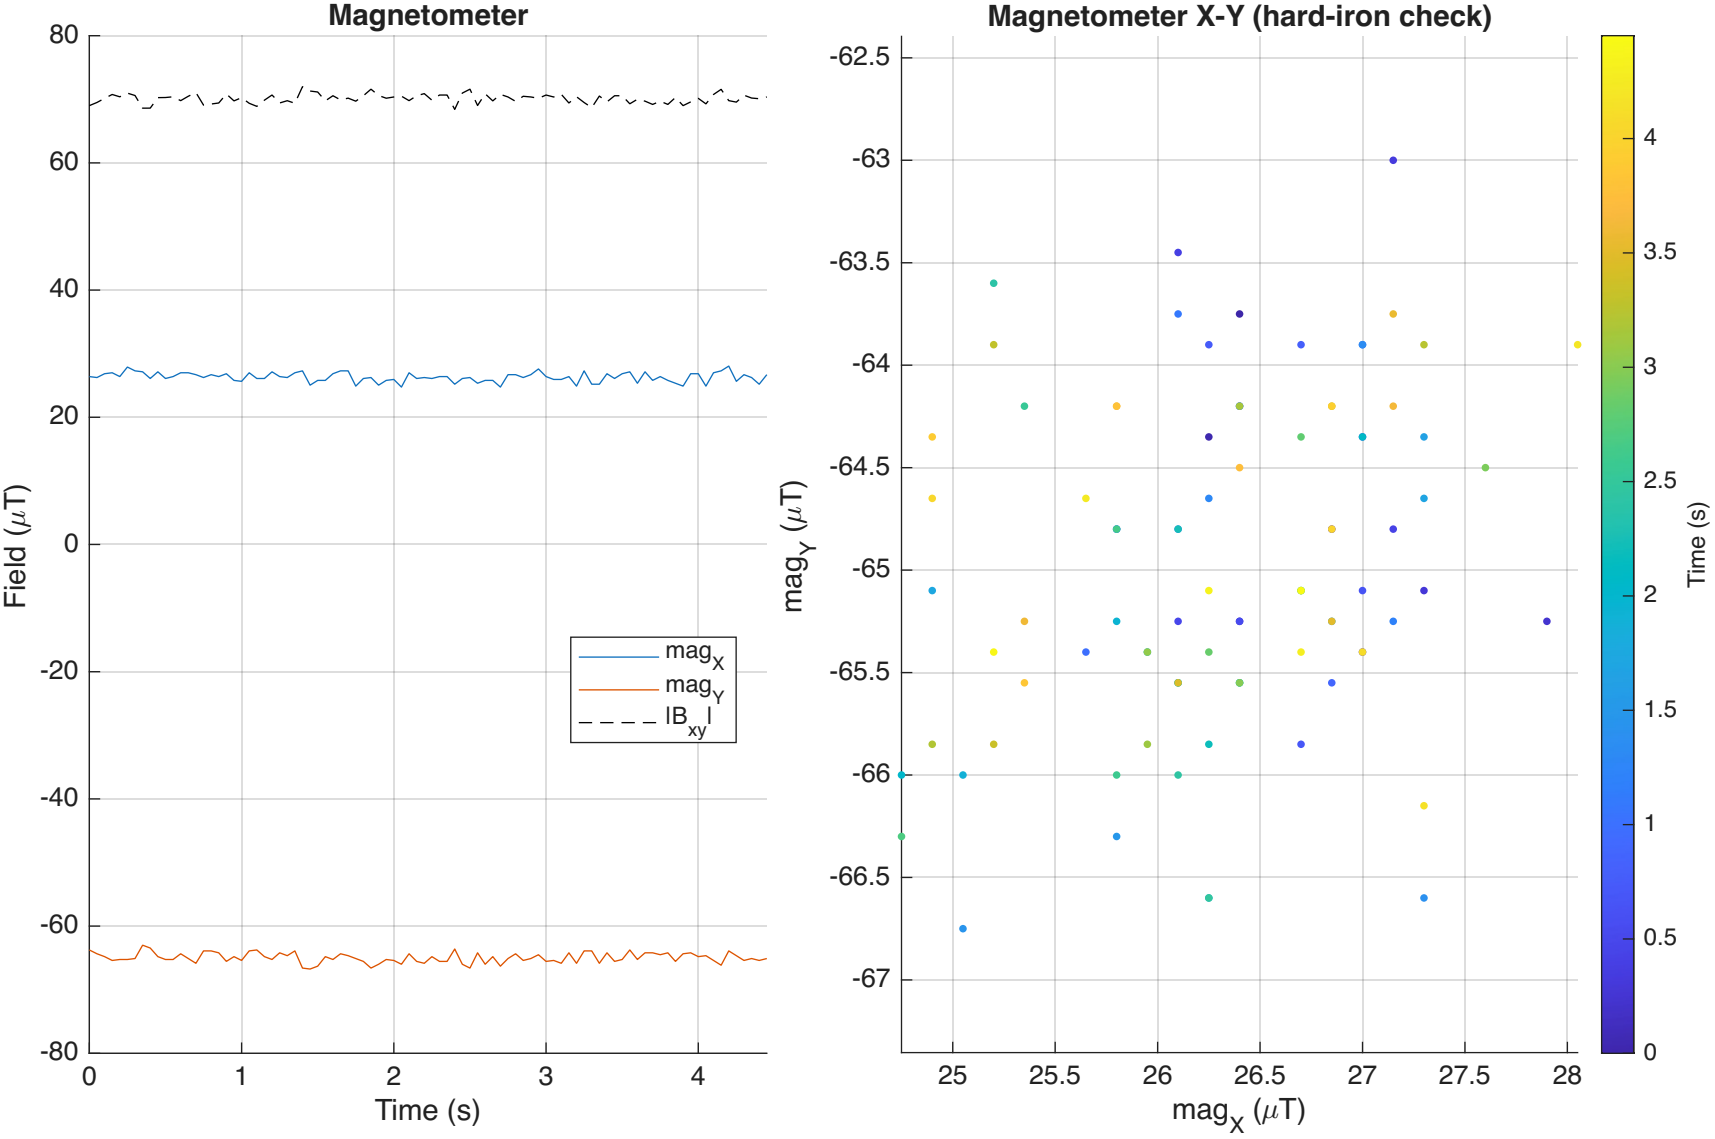
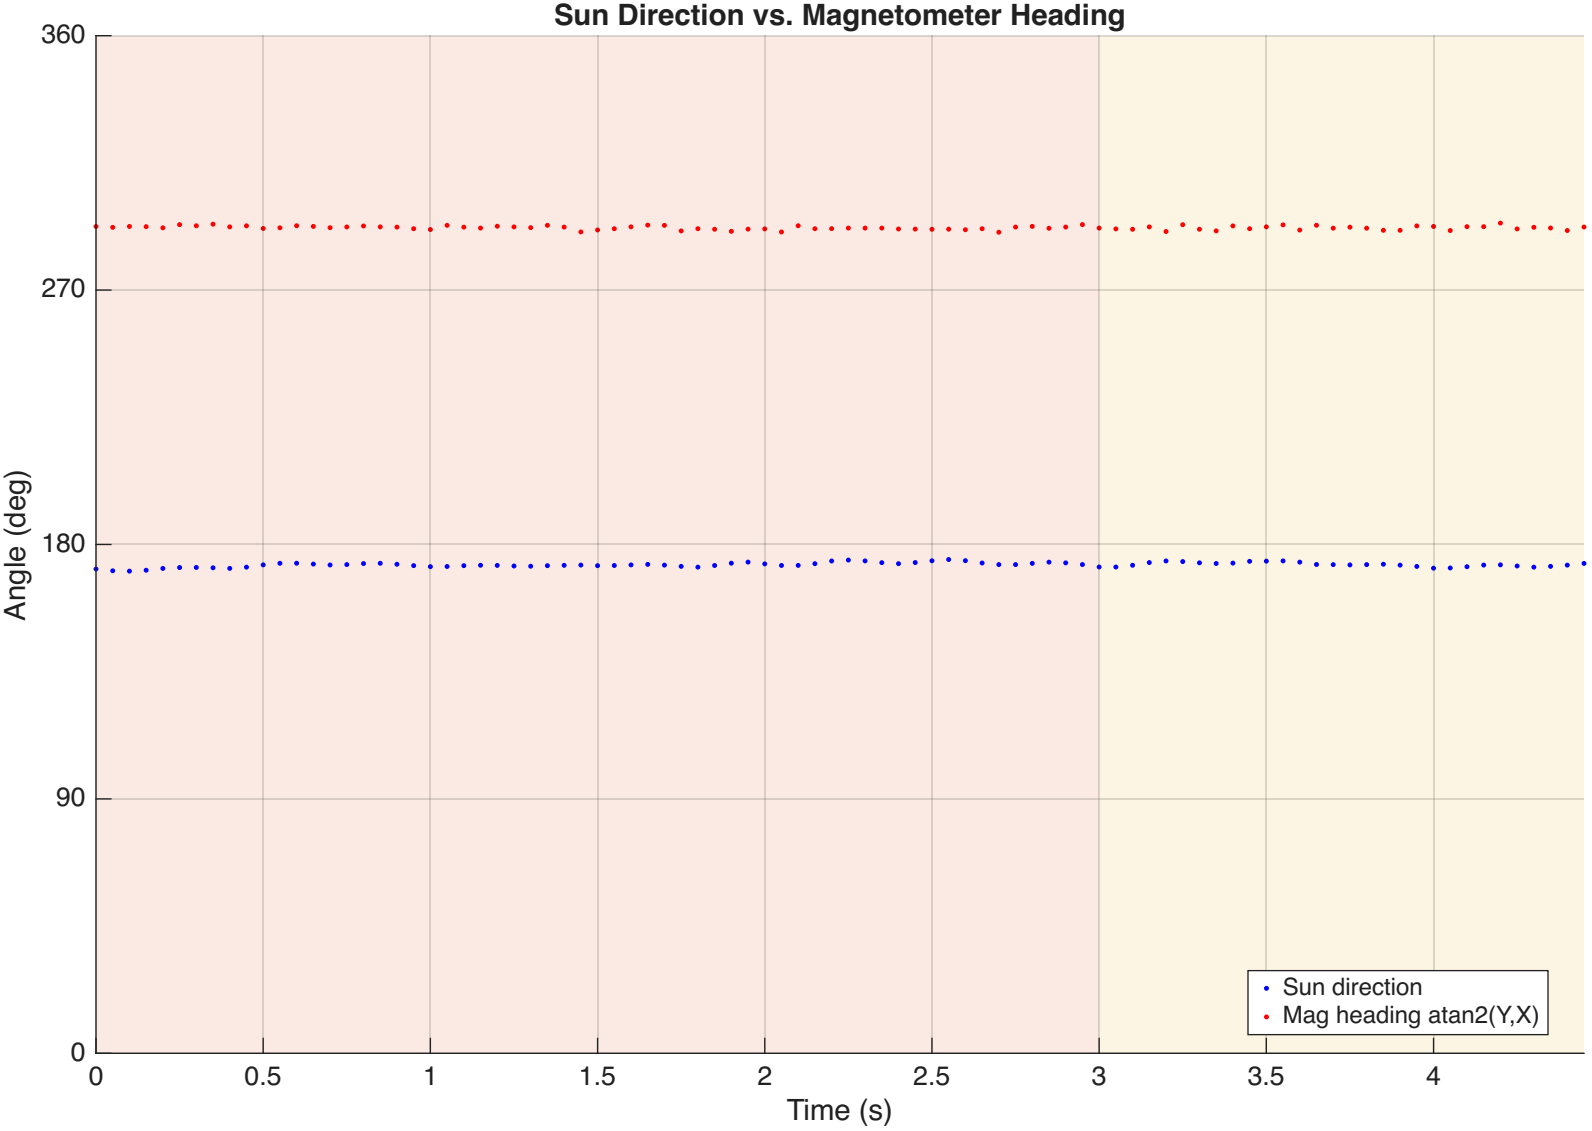

Sun Direction in Body Frame
Sun direction (deg)
360
270
180
90
0
0
0.5
1
1.5
2
2.5
3
3.5
4
Pointing Error (0/360 = on target)
Pointing error (deg)
360
315
270
225
180
135
90
45
0
SPINUP
HOLD
Time (s)

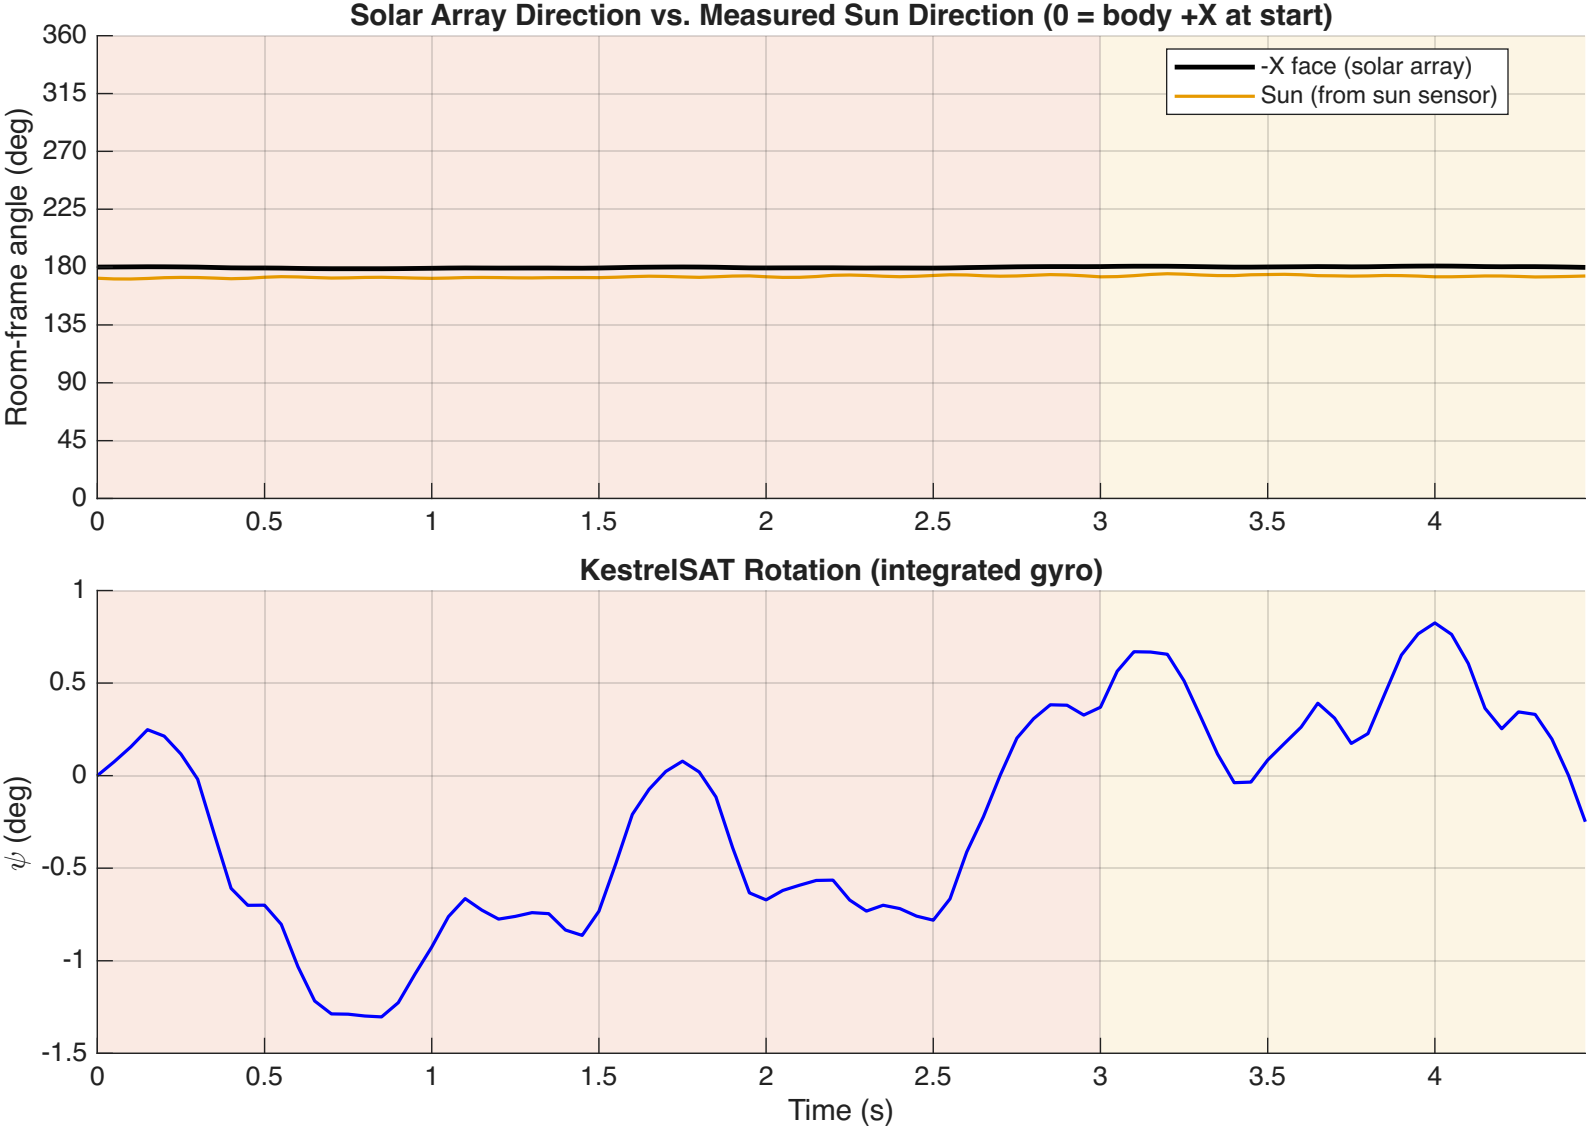

Z-Axis Body Rate (Gyro)
Body rate (deg/s)
Time (s)
8
6
4
2
0
-2
-4
-6
-8
-10
0
0.5
1
1.5
2
2.5
3
3.5
4
SPINUP
HOLD

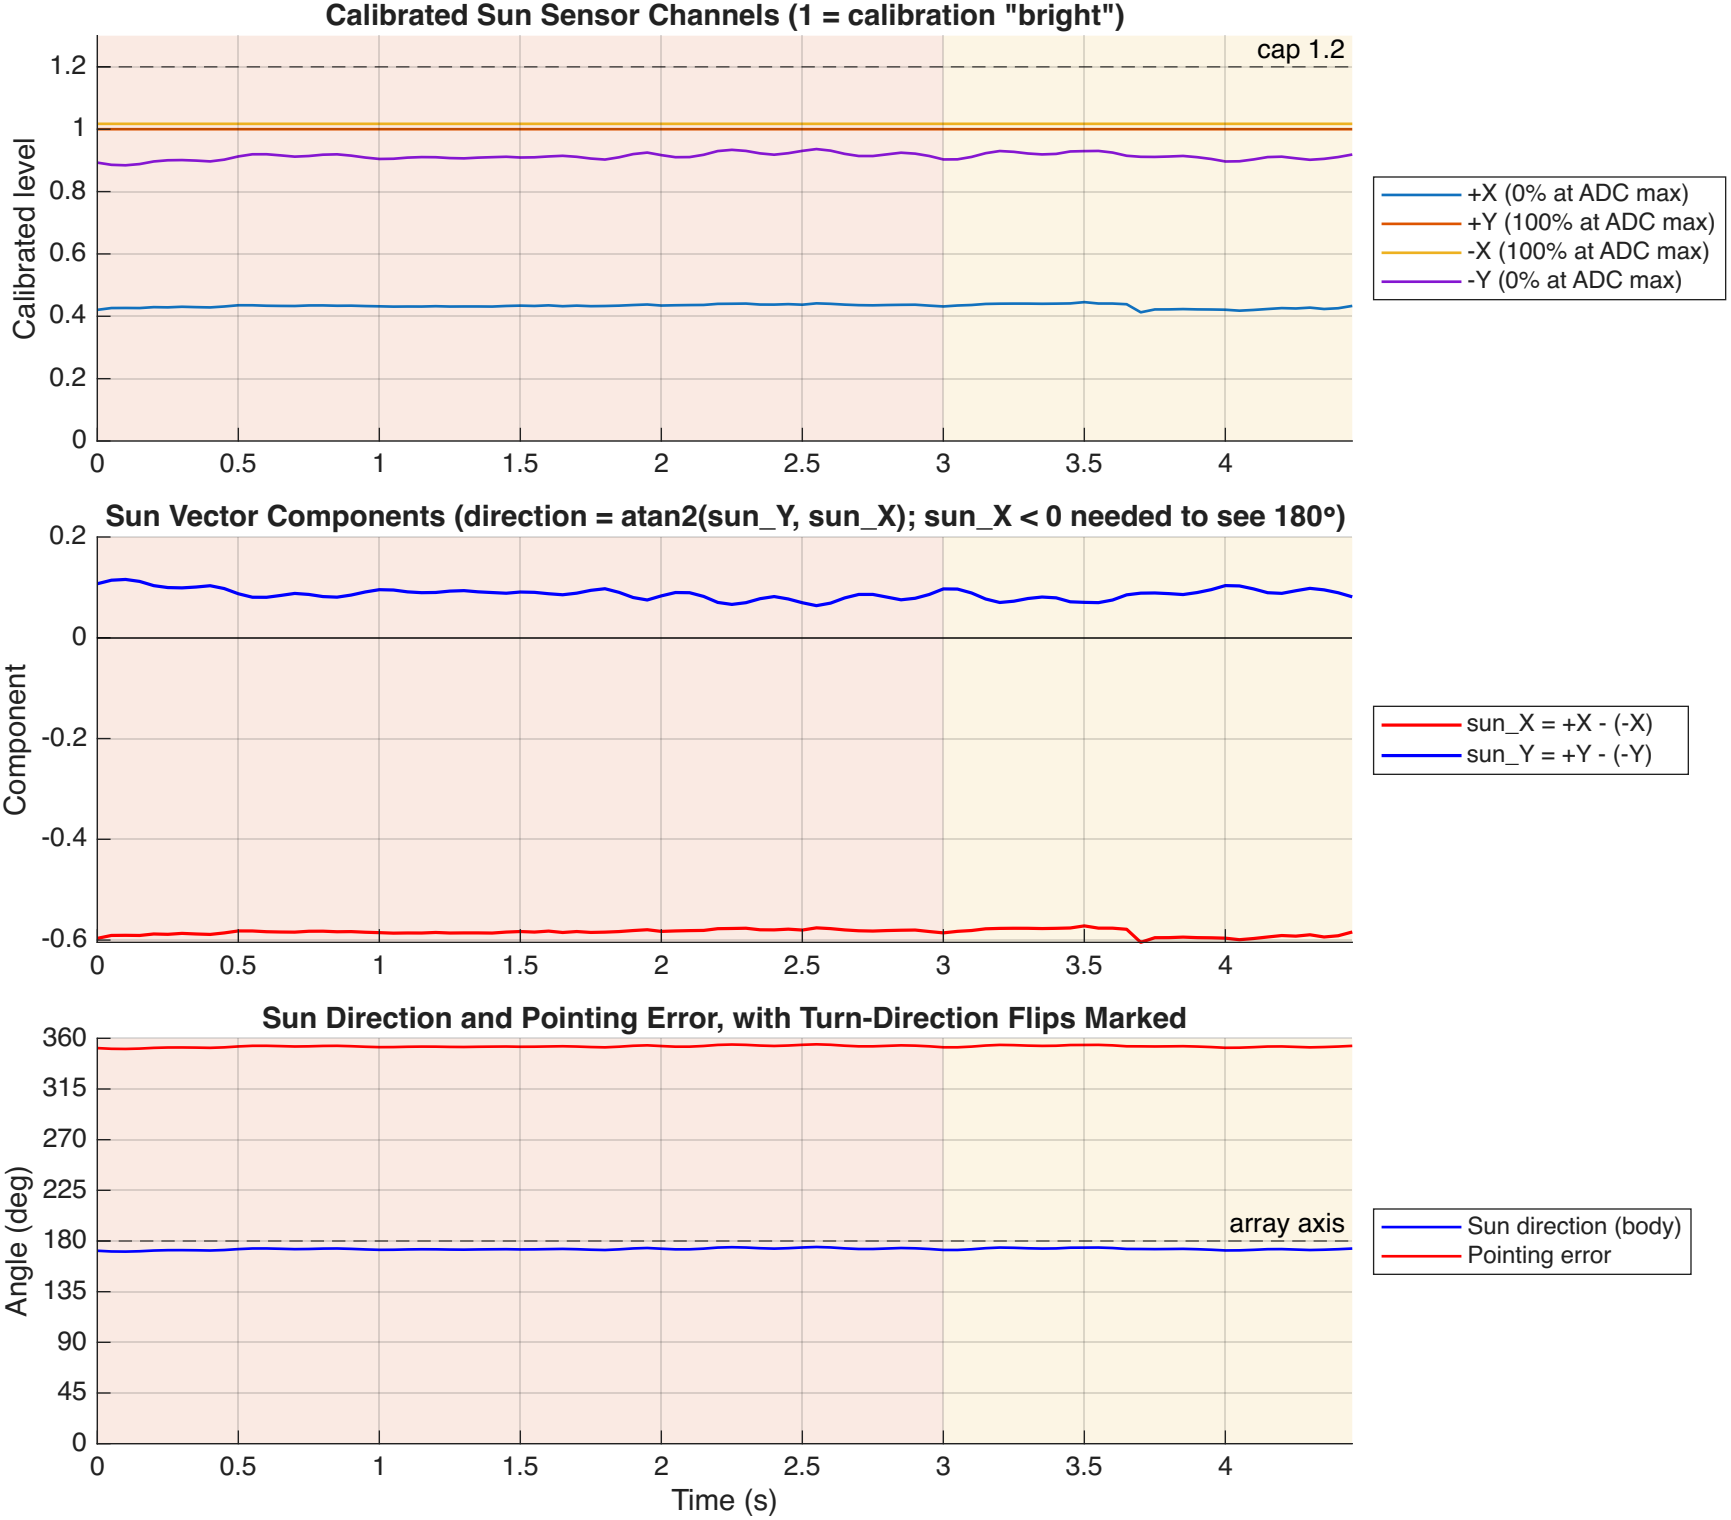

Reaction Wheel Speed
Commanded
Measured
Wheel speed (RPM)
250
200
150
100
50
0
0
0.5
1
1.5
2
2.5
3
3.5
4
Commanded Torque (magenta = wheel saturated)
Torque cmd
Saturated
Torque cmd (mN·m)
1
0.5
0
-0.5
-1
0
0.5
1
1.5
2
2.5
3
3.5
4
Time (s)

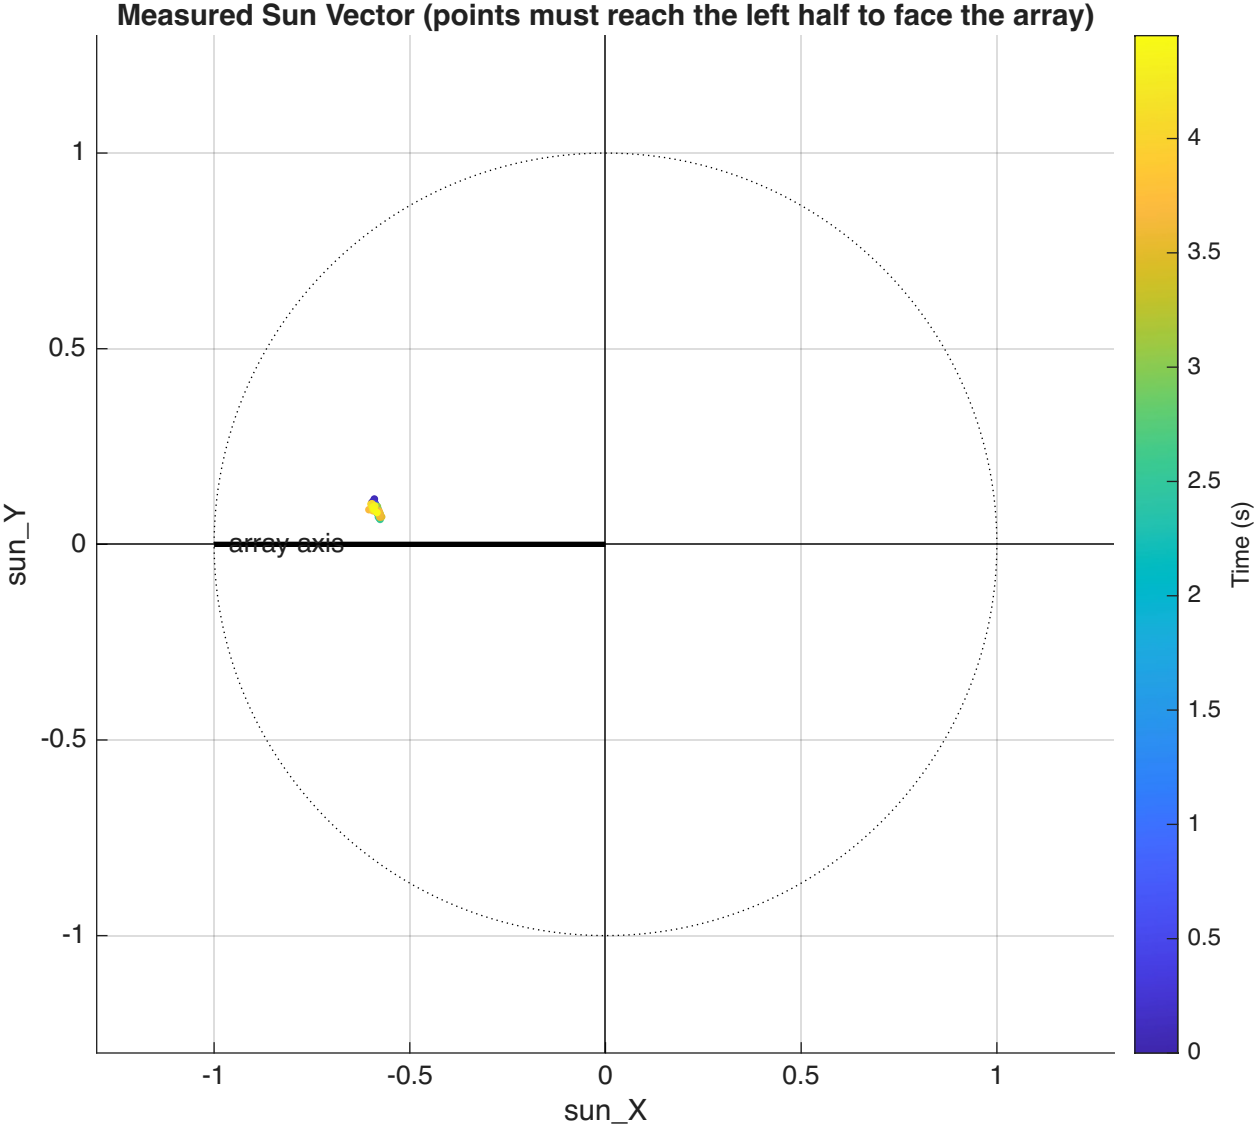

Sun Sensor Photodiode Readings
ADC max
+X
+Y
-X
-Y
ADC counts
4500
4000
3500
3000
2500
2000
1500
1000
0
0.5
1
1.5
2
2.5
3
3.5
4
Sun Vector Magnitude
sun_mag
3.31
3.3
3.29
3.28
3.27
3.26
3.25
3.24
Time (s)

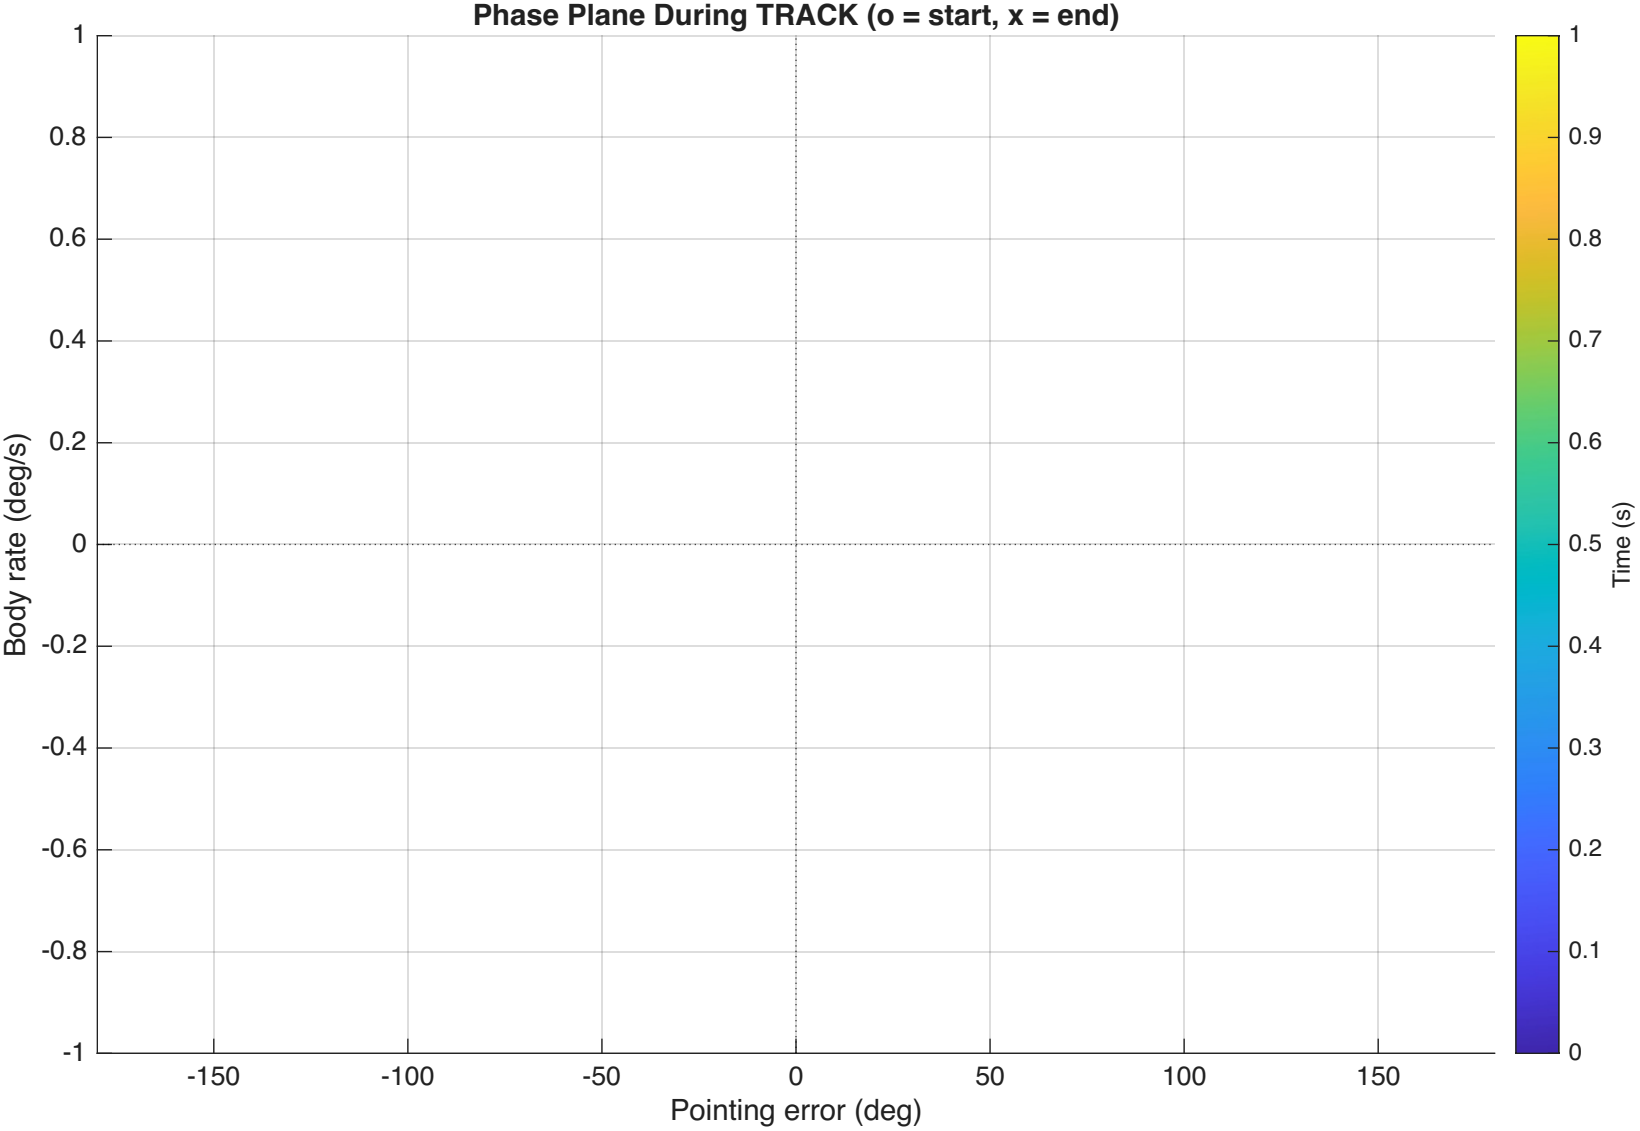

Magnetometer
Field (μT)
Time (s)
magX
magY
|Bxy|
Magnetometer X-Y (hard-iron check)
magY (μT)
magX (μT)
Time (s)

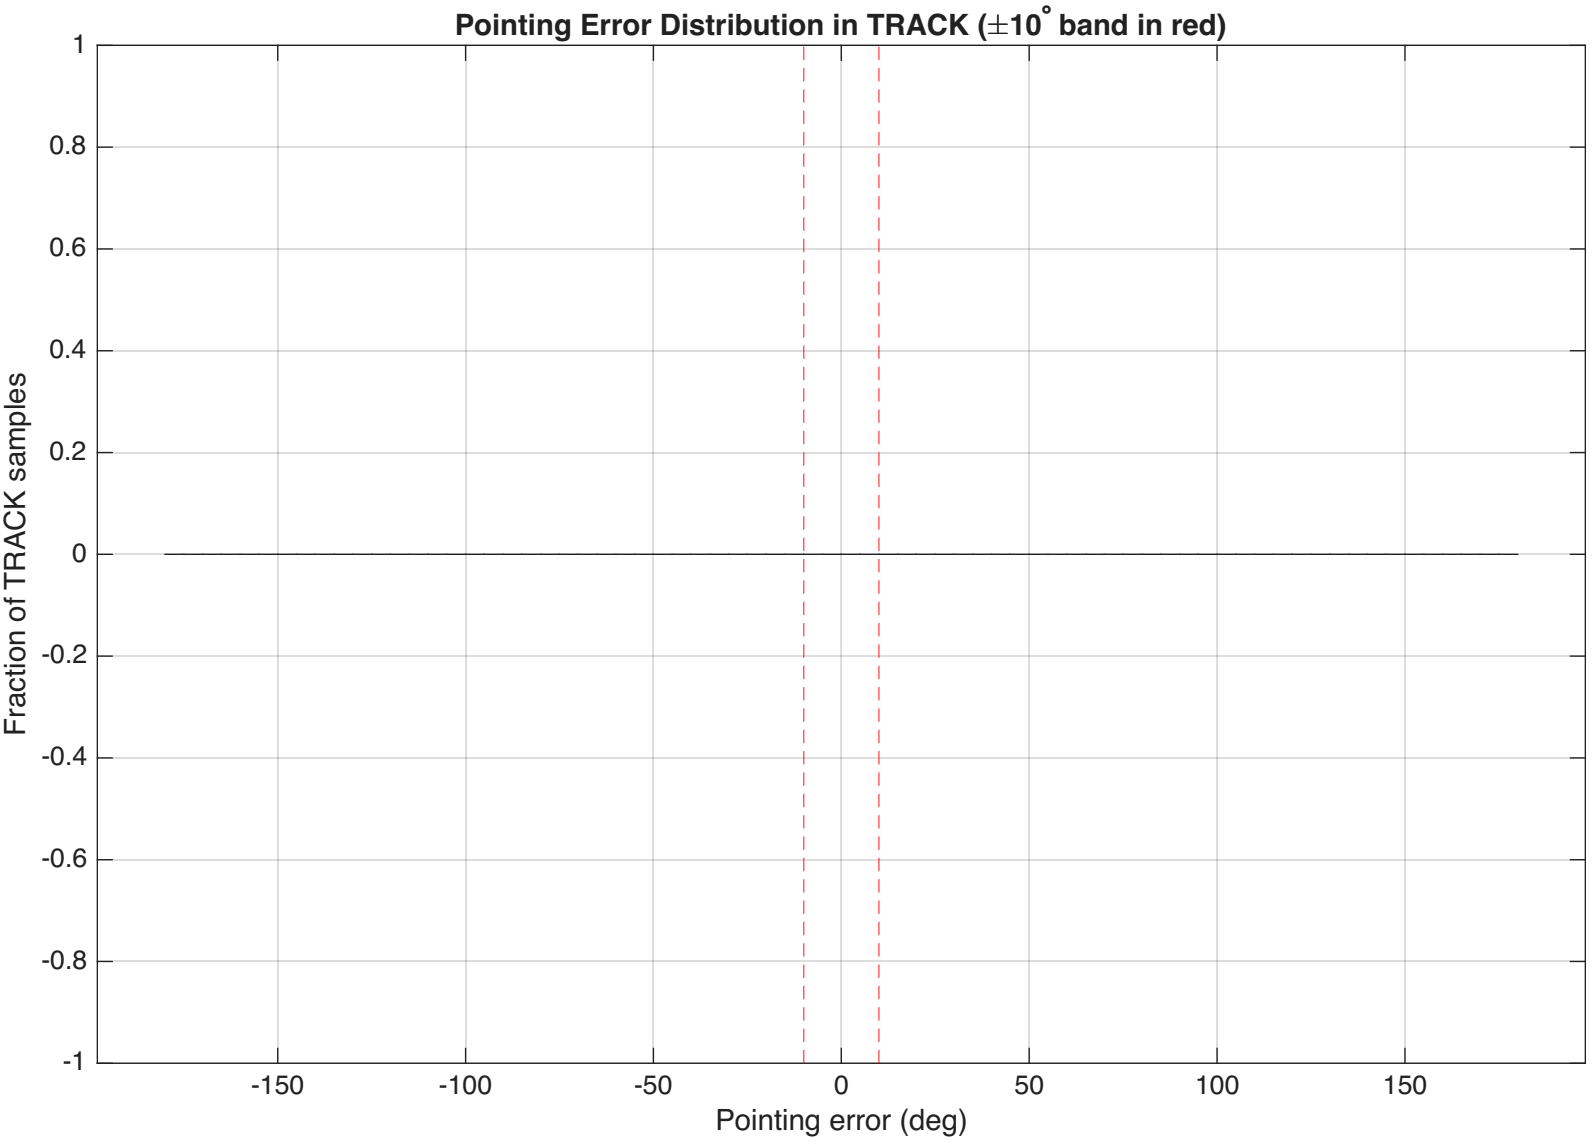

Sun Direction vs. Magnetometer Heading
360
270
180
90
0
Angle (deg)
0
0.5
1
1.5
2
2.5
3
3.5
4
Time (s)
Sun direction
Mag heading atan2(Y,X)


Solar Array Direction vs. Measured Sun Direction (0 = body +X at start)
-X face (solar array)
Sun (from sun sensor)
Room-frame angle (deg)
360
315
270
225
180
135
90
45
0
0
0.5
1
1.5
2
2.5
3
3.5
4
KestrelSAT Rotation (integrated gyro)
ψ (deg)
1
0.5
0
-0.5
-1
-1.5
Time (s)


Calibrated Sun Sensor Channels (1 = calibration "bright")
cap 1.2
Calibrated level
+X (0% at ADC max)
+Y (100% at ADC max)
-X (100% at ADC max)
-Y (0% at ADC max)
Sun Vector Components (direction = atan2(sun_Y, sun_X); sun_X < 0 needed to see 180°)
Component
sun_X = +X - (-X)
sun_Y = +Y - (-Y)
Sun Direction and Pointing Error, with Turn-Direction Flips Marked
Angle (deg)
array axis
Sun direction (body)
Pointing error
Time (s)


Measured Sun Vector (points must reach the left half to face the array)
array axis
sun_Y
sun_X
Time (s)
1
0.5
0
-0.5
-1
-1
-0.5
0
0.5
1
4
3.5
3
2.5
2
1.5
1
0.5
0


Phase Plane During TRACK (o = start, x = end)
Body rate (deg/s)
Pointing error (deg)
Time (s)
1
0.8
0.6
0.4
0.2
0
-0.2
-0.4
-0.6
-0.8
-1
-150
-100
-50
0
50
100
150
0.9
0.7
0.5
0.3
0.1


Pointing Error Distribution in TRACK (±10° band in red)
Fraction of TRACK samples
Pointing error (deg)
1
0.8
0.6
0.4
0.2
0
-0.2
-0.4
-0.6
-0.8
-1
-150
-100
-50
0
50
100
150