Engineering Maths EMAT 30007, Parameter Estimation(1)

Ksenia Shalonova

1 Estimation of population mean - confidence intervals

The confidence intervals for the parameter μ that we described in this section are all based on point estimates that could be assumed to be approximately normally distributed.

(a) To work out the coefficient in front of the standard error (t-value or Z-value) in the margin of error (μ estimate±margin of error) you can use the commands norminv and tinv:

In case of normal distribution:

```
alpha=0.05; % for 95% confidence level zv=norminv(1-alpha/2) % z-value for two-sided CI zv=norminv(1-alpha) % z-value for one-sided CI In case of t-distribution:
n=25; % sample size
tv=tinv(1-alpha/2, n-1) % t-value for two-sided CI tv=tinv(1-alpha, n-1) % t-value for one-sided CI
```

(b) The following measurement were recorded for the drying time (in hours) of a certain paint: 3.4, 2.5, 4.8, 2.9, 3.6, 2.8, 3.3, 5.6, 3.7, 2.8, 4.4, 4.0, 5.2, 3.0, 4.8. Assume that measurements represent a random sample from a normal distribution. Construct a two-sided 95% confidence interval for working out the mean drying time (MATLAB code is provided below).

```
>> clear all
>> x=[3.4, 2.5, 4.8, 2.9, 3.6, 2.8, 3.3, 5.6, 3.7, 2.8, 4.4, 4.0, 5.2, 3.0, 4.8]%random sample
>> n=length(x);
>> mx=mean(x);
>> s=std(x);
>> alpha=0.05; % for 95% confidence
>> tcr=tinv(1-alpha/2, n-1); % critical t value
>> me=tcr*s/sqrt(n); % margin of error
>> CI1= mx-me; % lower CI bound
>> CI2= mx+me; % upper CI bound
```

- (c) Could we have used z-score instead?
- (d) Explain what the phrase 95% confidence implies. Can we say that the mean drying time lies in the interval with probability 95%?
- (e) Now construct a 90% confidence interval for the mean drying time by changing one line of the code.
- (f) Many cardiac patients were implanted pacemakers to control their heartbeat. A plastic connector module mounts on the top of the pacemaker. Assuming a standard deviation of 0.0015 and an approximate normal distribution, find a 95% confidence interval for the mean of all connector modules made by a certain company. A random sample of 75 modules has an average of 0.310 inch.

```
>> clear all
>> mx=0.310;
>> s=0.0015;
>> n=75
>> alpha=0.05; % for 95% confidence level
>> zv=norminv(1-alpha/2) % z-value for two-sided CI
>> me=zv*s/sqrt(n); % margin of error
>> CI1= mx-me; % lower CI bound
>> CI2= mx+me; % upper CI bound
```


- (g) Download data from WORKHRS.xls from Blackboard. Find a 95% confidence interval for estimating the mean using both z-score and t-score. Compare the results.
- (h) Download data from ROBOTS.xls from Blackboard. Estimate μ of wheels on all social robots with 99% confidence. In repeated sampling, what proportion of confidence intervals will contain the true mean?

- 2 Random sampling from population distributions (Monte Carlo simulations): Use the commands ***rnd (e.g., normrnd, weibullrnd, ...). For visual representation of data use Distribution fitter in Apps.
 - (a) Below is an example of the code that generates normal sample of 100 elements with $\mu = 1$ and $\sigma = 0.2$. The experiment is repeated 500 times. The graph shows the distribution (approximated to normal) of the means from simulation of a random sampling.


```
>> clear all
>> rng(31) % choose your seed
>> for i = 1 : 500 % take 500 random samples
>> x = normrnd(1,0.2, [1 100]) % each sample contains 100 elements
>> m = mean(x)
>> mv(i) = m; % save means of samples
>> end
```

Mean: 0.999886 Variance: 0.000332487

Parameter Estimate Std. Err. mu 0.999886 0.000815459 sigma 0.0182342 0.000577484

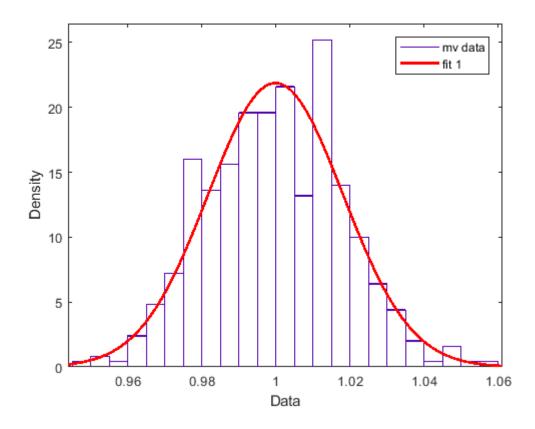

Use normplot(mv) to assess visually whether the sample data comes from a population with a normal distribution (see graph below).

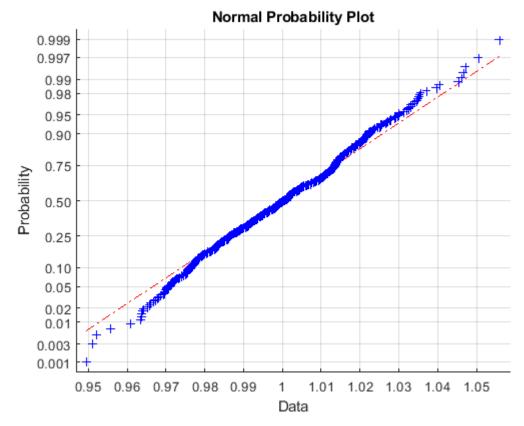

- (b) There is a normal population of rainfalls with mean 900 mm and standard deviation 200 mm. Show using simulations that the more data that is collected, the more accurate the μ estimate and hence the smaller its standard error.
 - Do you expect any 'unlucky samples' which mean $\bar{(}x)$ may not be included into 95% confidence interval?
- (c) Show that the sample mean is less variable than individual values from the population so the mean's standard error is less than the standard deviation.
 - Note that standard deviation describes the variability of sample values; the standard error of an estimator describes the variability of that estimator.
- (d) Use a simulation (e.g., use a normal population of rainfalls with mean 900 mm and standard deviation 200 mm) to investigate whether the mean or median is a better estimator of the μ of a normal distribution. Compare the error distributions for mean and median by analysing (1) bias and (2) spread or standard deviation.
- (e) Use simulation to compare the use of the sample mean and median as estimators of the mean of a skew distribution, for example, exponential distribution (use exprnd). Again, compare the error distributions for mean and median by analysing (1) bias and (2) spread or standard deviation.

3 Central Limit Theorem:

Even if population is not normally distributed, the Central Limit Theorem states that the sampling distribution of the sample mean becomes normal for n > 30.

- (a) You can run the code below to verify that the distribution of means is approximately normal in Poisson distribution for large n.
 - >> clear all >> rng(31) %
 - >> rng(31) % choose your seed
 - >> for i = 1 :500
 - >> x = poissrnd(2,[1 100])
 - >> pm = mean(x)
 - >> pmv(i) = pm;
 - >> end

(b) Change the code for n < 30. Comment on the results that you get: do sample means still form a normal distribution?

4 Confidence interval for proportion:

An experiment was conducted to determine the effectiveness of heat treatment to kill fruit fly eggs in mangoes. From 5903 eggs in treated mangoes, 637 adults hatched. What is the probability that an egg will survive the heat treatment?

- (1) Work out point estimate for p.
- (2) Work out standard error for point estimate.
- (3) Work out 95% confidence interval for p.

5 Tolerance intervals for normal populations:

Use example from the lecture. A corporation manufactures field rifles. To monitor the process, an inspector randomly selected fifty firing pins from the production line. The sample mean \bar{x} for all observations is 0.9958 inch and standard deviation s is 0.0333. Assume that the distribution of pin lengths is normal.

- (1) Use the sample information to find a 95% tolerance interval for 90% of all the field rifles. For 99% of all the field rifles? You can download MATLAB function ToleranceFactor for finding K.
- (2) Specifications require the length of field rifles to be within 1 ± 0.1 of an inch. Has the specification being met?