
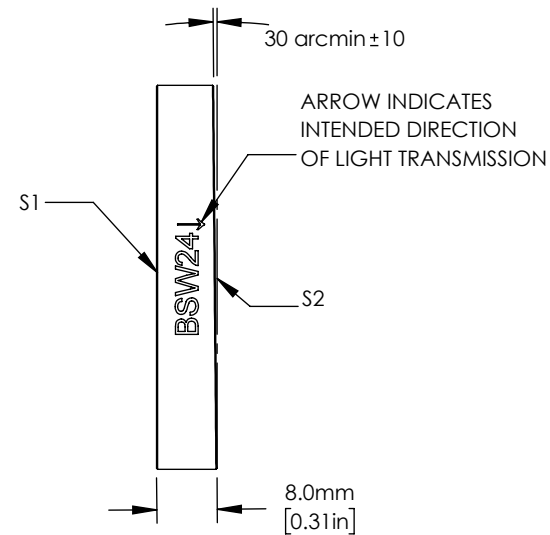


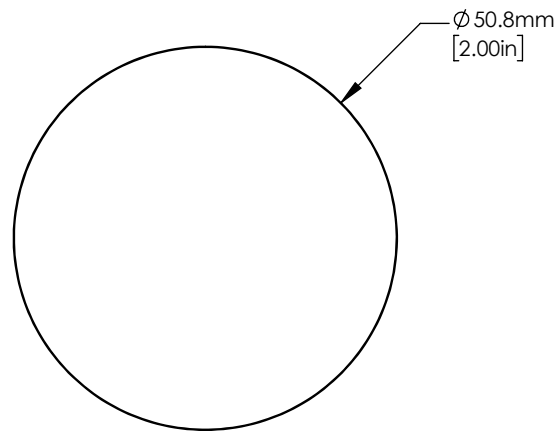

NOTES/SPECIFICATIONS:

- CLEAR APERTURE: $> \varnothing 45.72$ mm
- SURFACE QUALITY: 20-10 SCRATCH-DIG
- SURFACE FLATNESS: $\lambda / 4$ @ 633 nm OVER THE CLEAR APERTURE
- COATING (S1): 0.9-2.6 μ m BEAMSPLITTER COATING AT 45° AOI
- COATING (S2): BBAR COATING FOR 0.9-2.6 μ m
Ravg <1.5% WITHIN WAVELENGTH RANGE AT 45° AOI
- OVERALL PERFORMANCE: Tabs 50 $\pm$ 10%, Rabs 50 $\pm$ 10%
Tabs+Rabs >99%, |Ts-Tp| < 40% and |Rs-Rp| < 40%, 900-2600 nm, 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com Ø50.8 mm 50:50 BEAMSPLITTER, COATED: 0.9-2.6 μ m, T = 8 mm	
	NAME	DATE		
DRAWN	GG	10/JUL/11	MATERIAL	
APPROVAL	BW	15/OCT/21	IR FUSED SILICA	
COPYRIGHT © 2021 BY THORLABS			ITEM #	APPROX WEIGHT
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			BSW24	36g