



3.3 V Regulator




5V to Pi Hat




5V Power Input

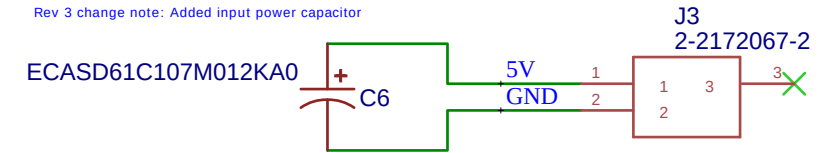

Spare Qwiic Connector




IO Connector from Pi

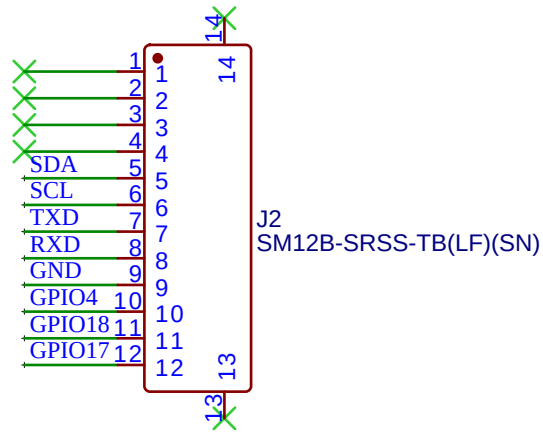


Rev 3 change note: Added current limiting resistor on board.
Note: should be about 8 mA drive current for the integrated small red LED NKK switch or 2 mA for the external panel mount switch.
Old versions of the NKK switch with a resistor soldered inline should still be able to light up.

Lighted Button Connector

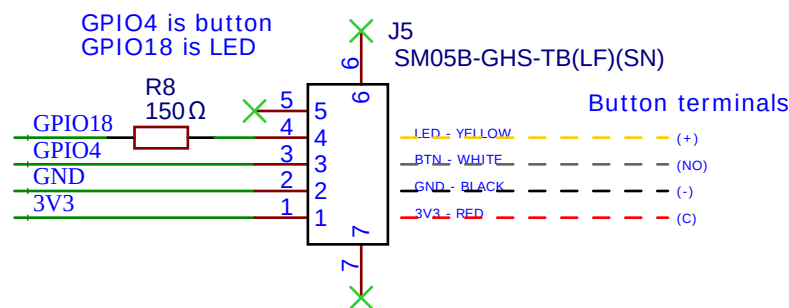


I2C Pullups




(For one cable - not sure if they're all the same)
GND: White
TXD: Grey
RXD: Pink
3V3: Brown
SDA: Green
SCL: Yellow

Signal Connector

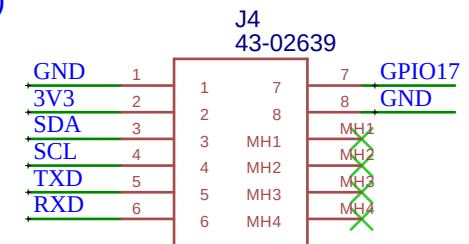


Rev 3 change note: Added GND to Pin 8 (previously NC)

BME280 Temperature/Humidity Monitoring


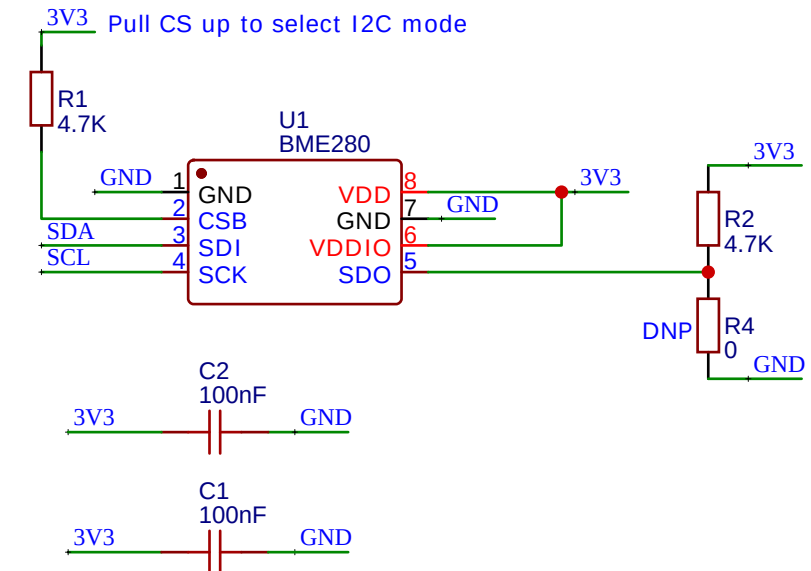


RTC

Rev 3 change note: Added RTC onboard

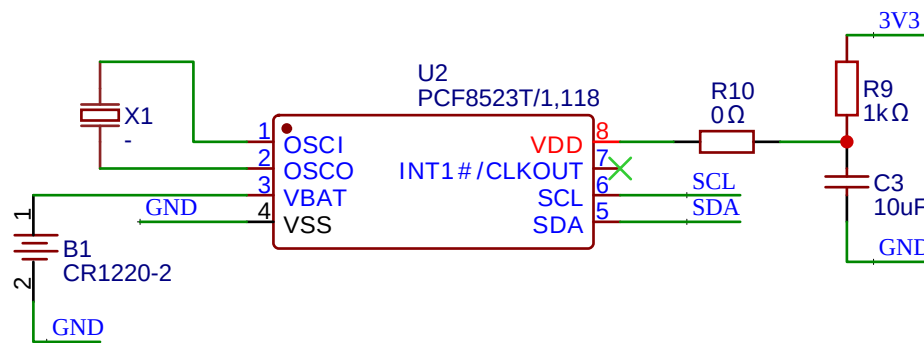

LED Power Rail Indicators

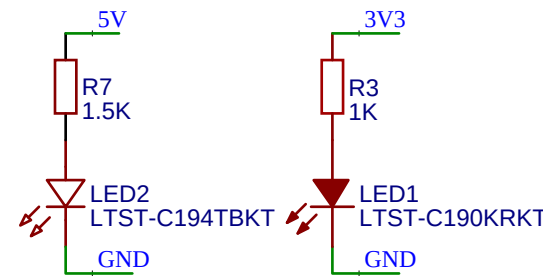

TITLE: Peregrine Payload Divider		REV: 4
Company: Stanford Radio Glaciology		Sheet: 1/1
Date: 2022-02-08		Drawn By: Thomas Teisberg