


You might use a classical Xtal or a Low Power oscillator chip here.  
In the case of using an oscillator chip, connect its output to the OSI and leave OSO open.  
You may want to remove the 12pF capacitors in that case as well.

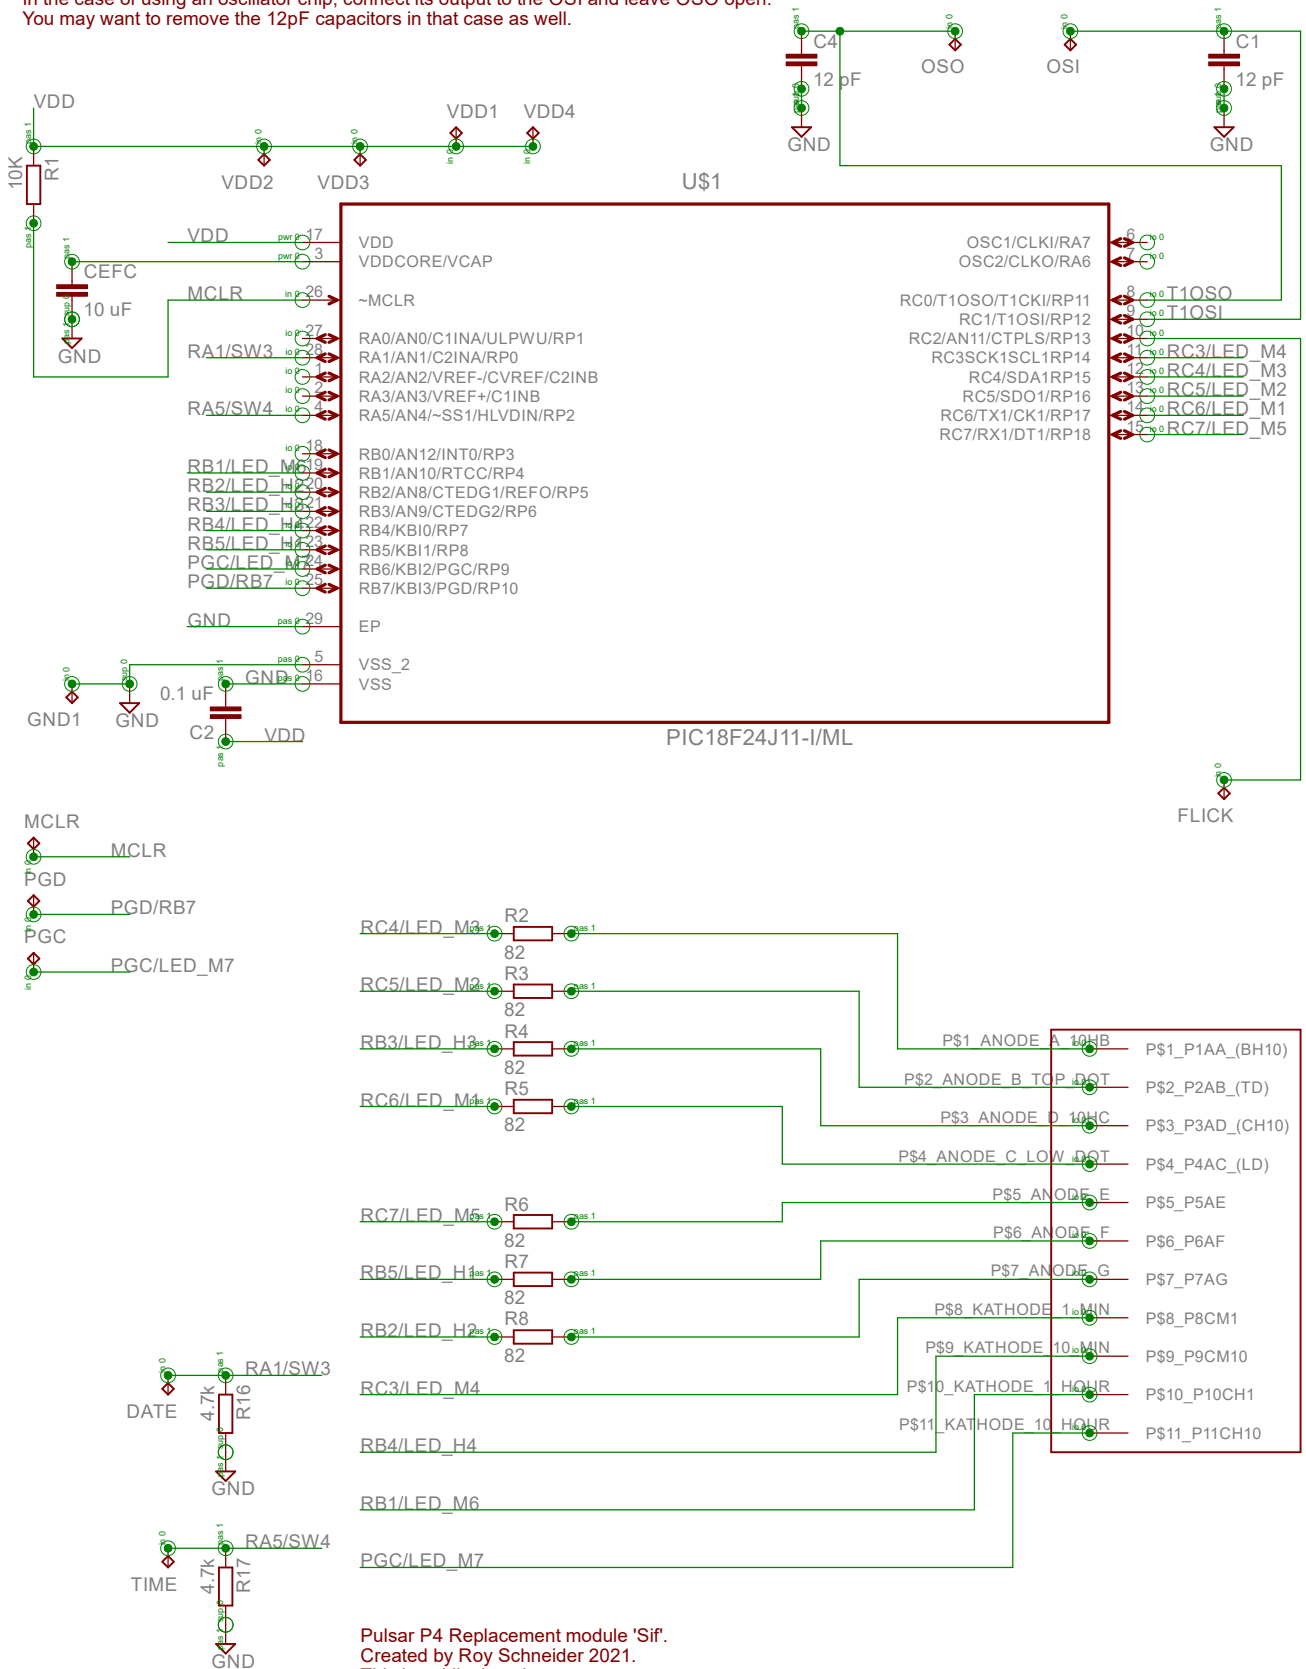

Date: 17.12.2022 21:29:38

TITLE: Pulsar P4 Sif Mod

Sheet: 1/1