

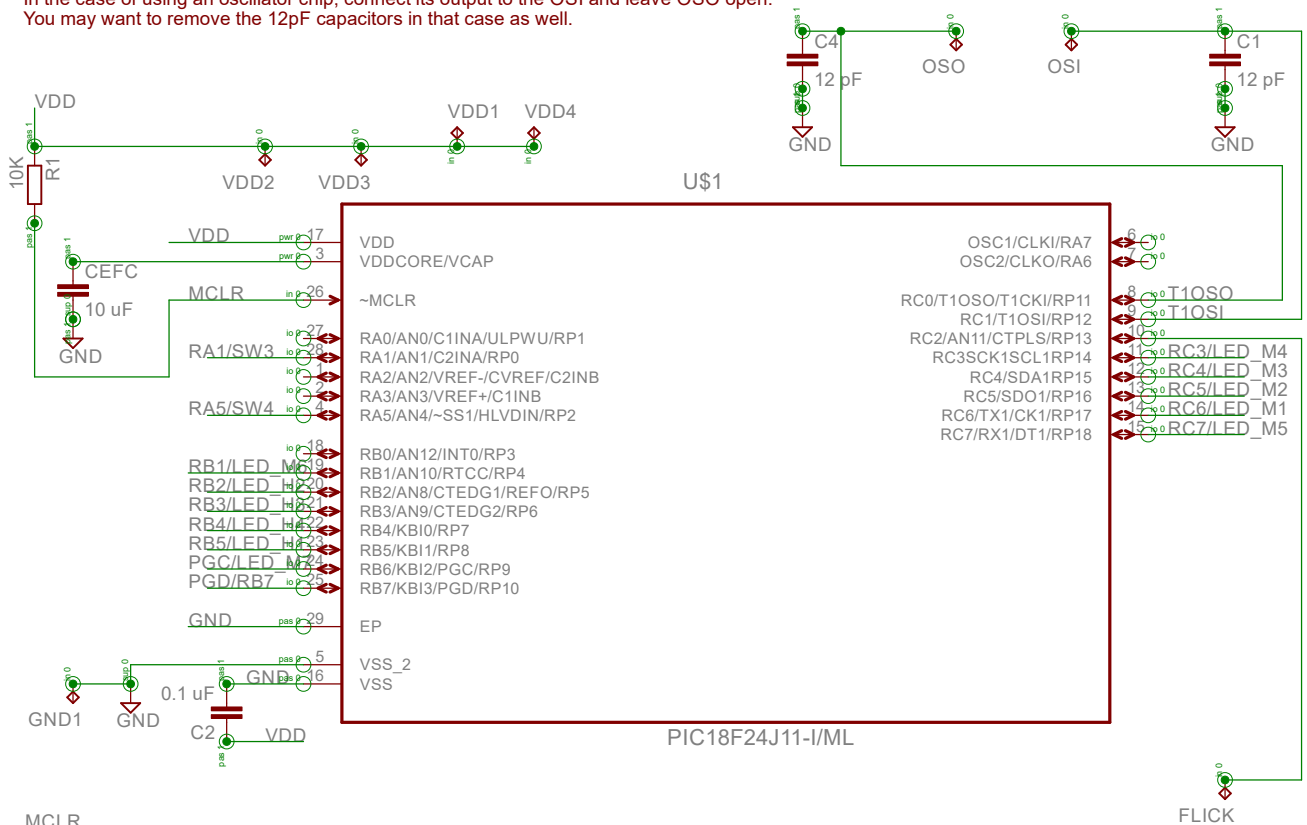


You might use a classical Xtal or a Low Power oscillator chip here.  
In the case of using an oscillator chip, connect its output to the OSI and leave OSO open.  
You may want to remove the 12pF capacitors in that case as well.

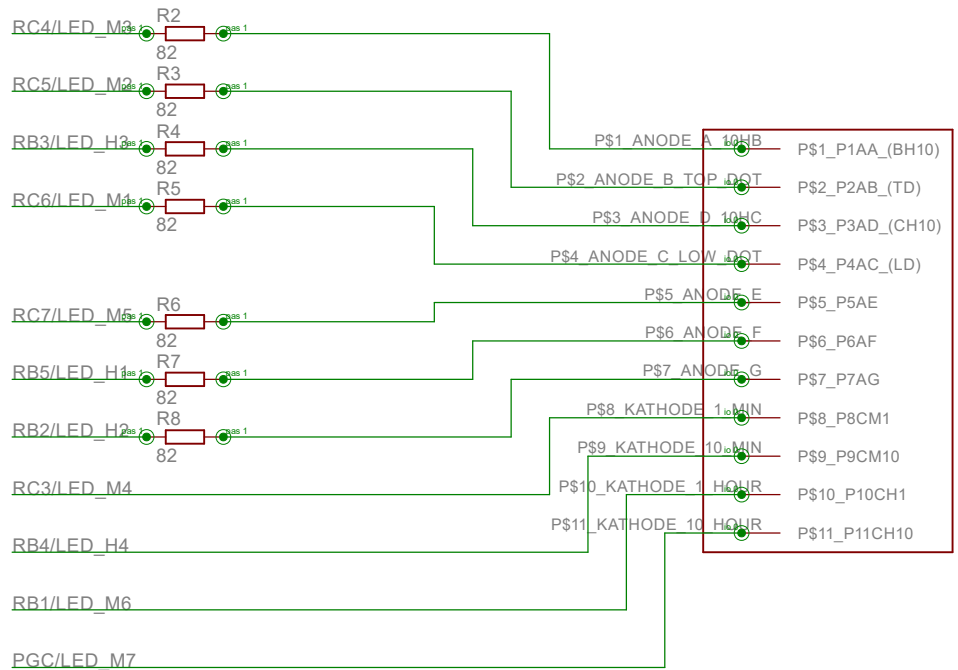

MCLR  
PGD  
PGC  
PGD/RB7  
PGC/LED\_M7



Pulsar P4 Replacement module 'Sif'.  
Created by Roy Schneider 2021.  
This is public domain.

Date: 27.11.2021 19:57:37

TITLE: Pulsar P4 Sif Mod

Sheet: 1/1