


C-102 NOZZLE SCHEDULE					
MARK	SIZE	RATING	LOCATION	SERVICE	
N1	12"	150# RF	EL 112.000	Kero feed from C-101 tray 10	
N2	8"	150# RF	TOP HEAD	Vapour return to C-101	
N3	6"	150# RF	EL 108.950	Stripping steam	
N4	8"	150# RF	BTM HEAD	Bottoms to P-109	
NSA/B	2"	150# RF	EL 104.200	LT / LG bridle	
N6	3"	150# RF	TOP HEAD	Vent / steam-out / PSV-1009 (commo)	
M1	24"	150# RF	EL 112.450	Manway 24"	
M2	24"	150# RF	EL 107.300	Manway 24"	


Design P / T	3.5 barg / 250 C
Material / CA	SA-516-70 / 3.0 mm (CS)
Shell / heads / skirt t	8 / 10 / 8 mm
Skirt height / BTL	4000 mm / EL 104.000
Trays	6 x 1-pass valve trays, 610 spacing, 4105
Weights empty / op / test	19.9 / 22.9 / 41.2 t
Hydrotest top / bottom	4.55 / 5.54 barg

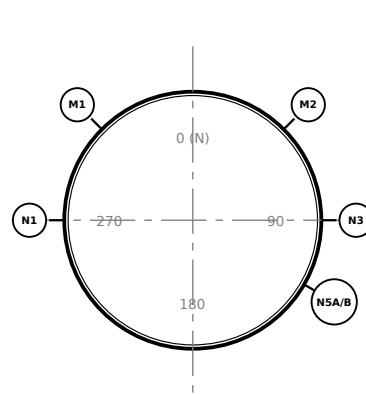

C-102 NOZZLE ORIENTATION 1:50
(manways alternate 315 / 45 deg - platform side)

C-103 NOZZLE SCHEDULE					
MARK	SIZE	RATING	LOCATION	SERVICE	
N1	12"	150# RF	EL 112.500	Diesel feed from C-101 tray 22	
N2	8"	150# RF	TOP HEAD	Vapour return to C-101	
N3	6"	150# RF	EL 108.500	Stripping steam	
N4	10"	150# RF	BTM HEAD	Bottoms to P-110	
NSA/B	2"	150# RF	EL 104.700	LT / LG bridle	
N6	3"	150# RF	TOP HEAD	Vent / steam-out / PSV-1009 (commo)	
M1	24"	150# RF	EL 112.950	Manway 24"	
M2	24"	150# RF	EL 107.800	Manway 24"	


Design P / T	3.5 barg / 330 C
Material / CA	SA-516-70 / 6.0 mm (CS + 4105 clad)
Shell / heads / skirt t	12 / 12 / 8 mm
Skirt height / BTL	4500 mm / EL 104.500
Trays	6 x 1-pass valve trays, 610 spacing, 4105
Weights empty / op / test	26.5 / 30.1 / 53.1 t
Hydrotest top / bottom	4.77 / 5.76 barg

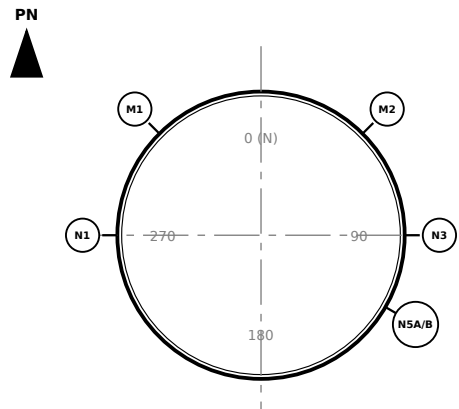

C-103 NOZZLE ORIENTATION 1:50
(manways alternate 315 / 45 deg - platform side)

C-104 NOZZLE SCHEDULE					
MARK	SIZE	RATING	LOCATION	SERVICE	
N1	10"	150# RF	EL 111.500	Ago feed from C-101 tray 32	
N2	6"	150# RF	TOP HEAD	Vapour return to C-101	
N3	3"	150# RF	EL 107.500	Stripping steam	
N4	8"	150# RF	BTM HEAD	Bottoms to P-111	
NSA/B	2"	150# RF	EL 103.700	LT / LG bridle	
N6	3"	150# RF	TOP HEAD	Vent / steam-out / PSV-1009 (commo)	
M1	24"	150# RF	EL 111.900	Manway 24"	
M2	24"	150# RF	EL 106.800	Manway 24"	

Design P / T	3.5 barg / 375 C
Material / CA	SA-516-70 / 6.0 mm (CS + 4105 clad)
Shell / heads / skirt t	10 / 12 / 8 mm
Skirt height / BTL	3500 mm / EL 103.500
Trays	6 x 1-pass valve trays, 610 spacing, 4105
Weights empty / op / test	18.4 / 20.4 / 32.3 t
Hydrotest top / bottom	5.16 / 6.13 barg

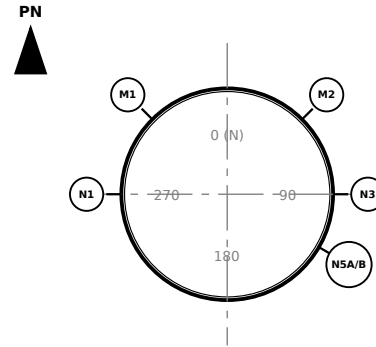


C-104 NOZZLE ORIENTATION 1:50
(manways alternate 315 / 45 deg - platform side)


GRAVITY FEED CHECK (C-101 DRAW -> STRIPPER N1)				
STRIPPER	C-101 DRAW	DRAW EL	INLET EL	HEAD m
C-102	N6 (tray 10)	135.710	112.000	23.7
C-103	N10 (tray 22)	127.840	112.500	15.4
C-104	N14 (tray 32)	121.390	111.500	9.9

LEGEND	
	Valve tray with downcomer
	Liquid distributor
	Liquid level (LLL/NLL/PLL)
	Nozzle - mark and size
	Draw sump
	Packed bed (structured / grid)
	Collector / chimney tray
	Manway (shown on face)
	Platform with handrail
	External stiffening ring


C-102 - KERO SIDE STRIPPER
ID 1700 x 9200 T/T - ELEVATION 1:50

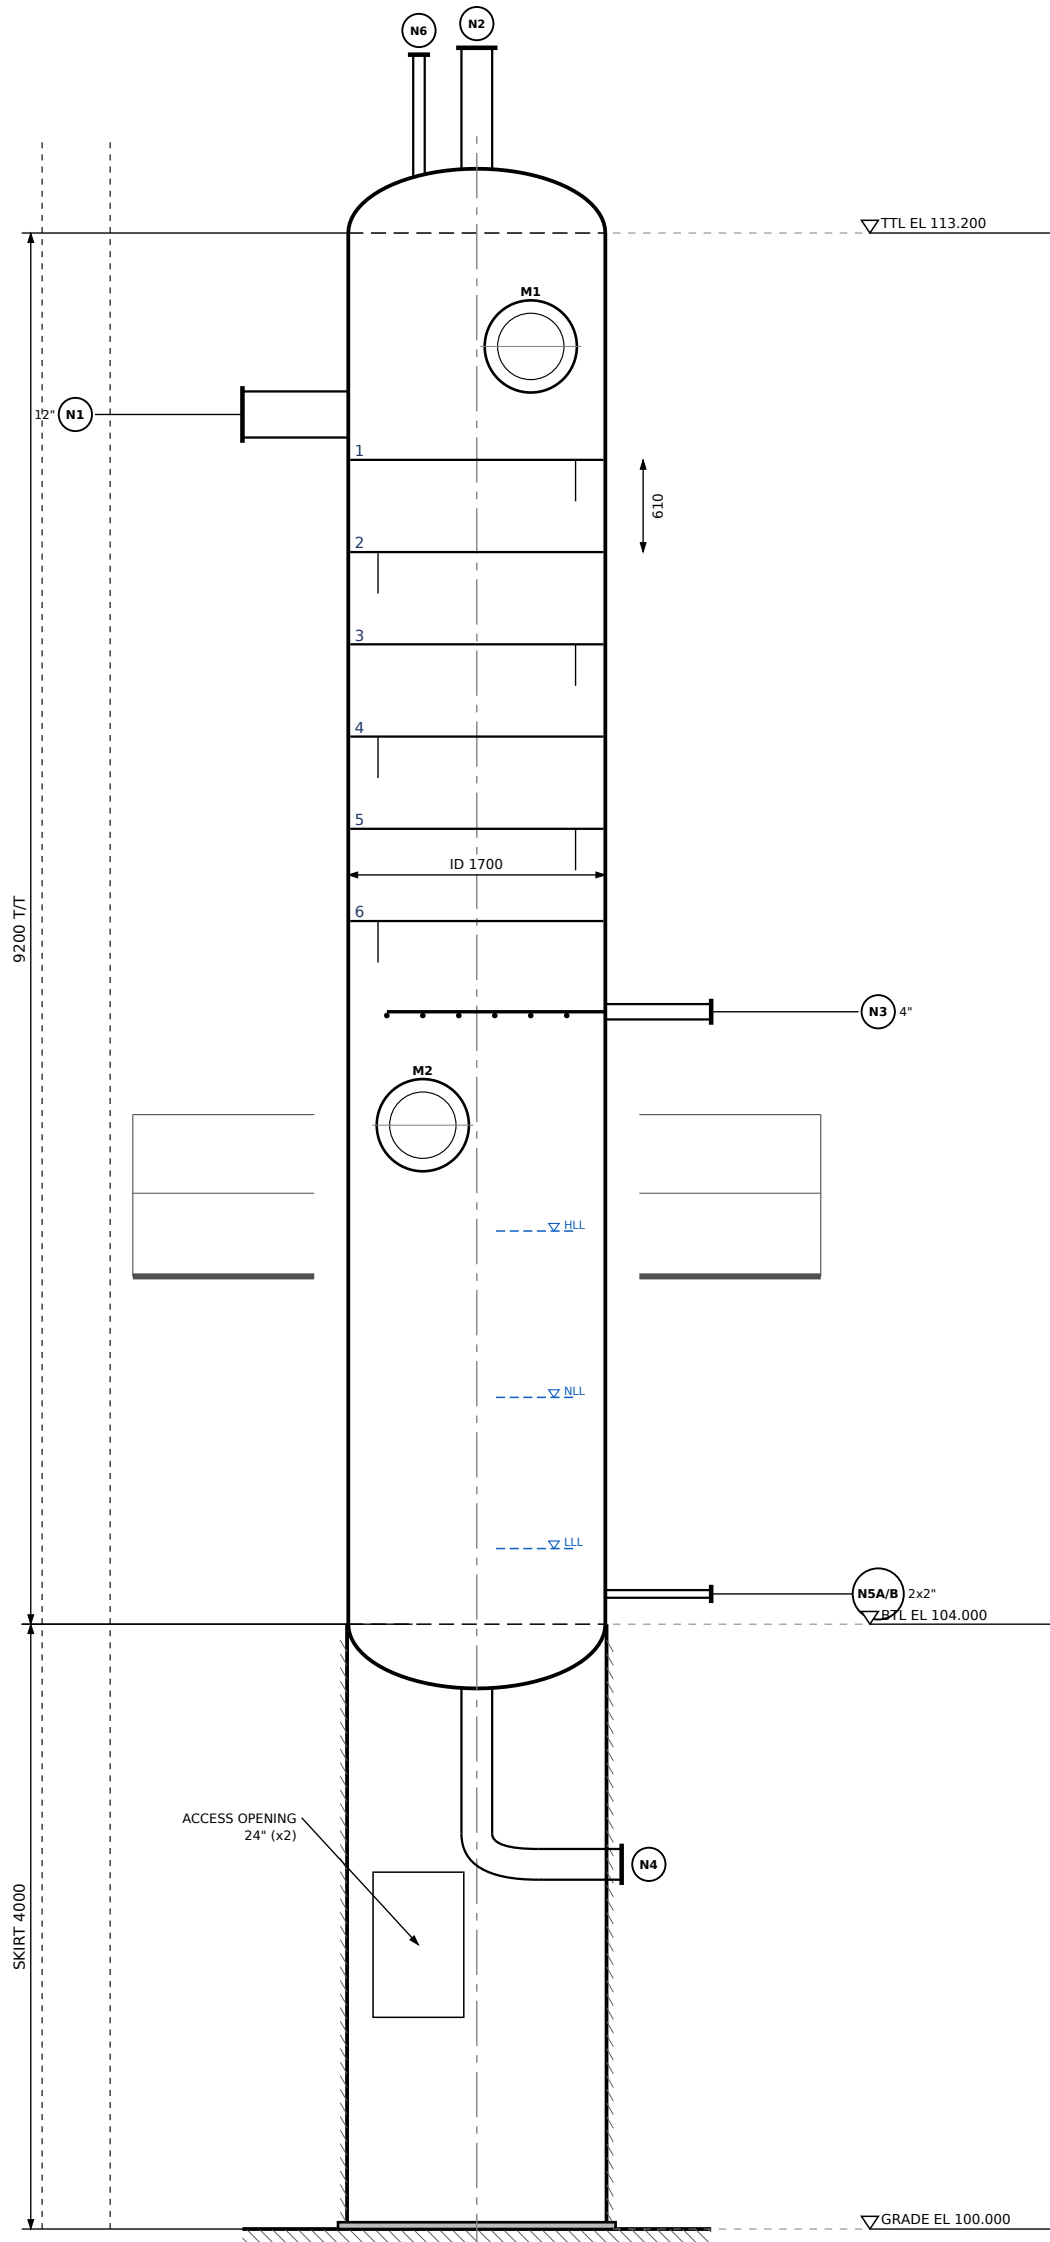

C-103 - DIESEL SIDE STRIPPER
ID 1900 x 9200 T/T - ELEVATION 1:50

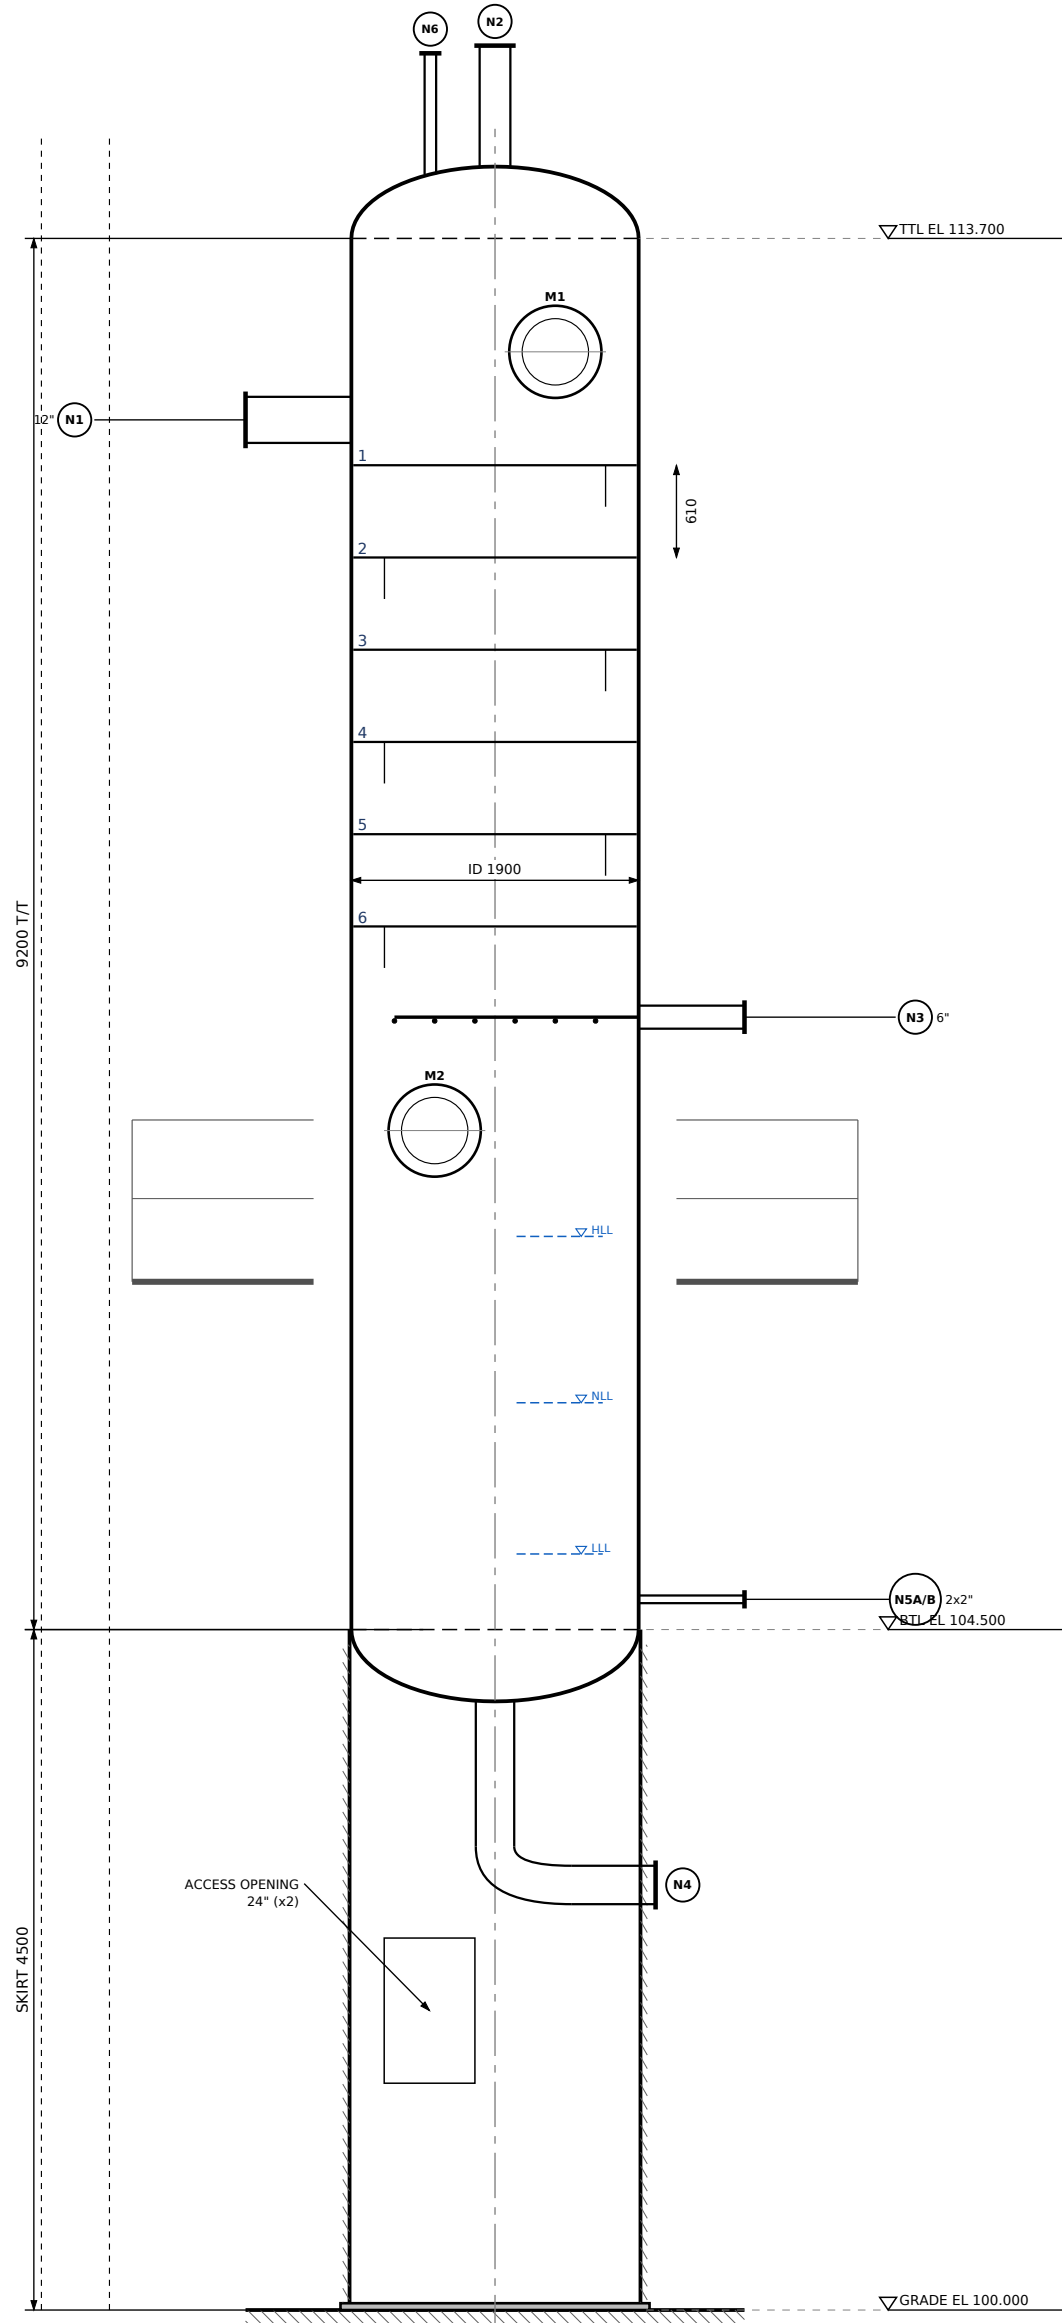

C-104 - AGO SIDE STRIPPER
ID 1400 x 9200 T/T - ELEVATION 1:50

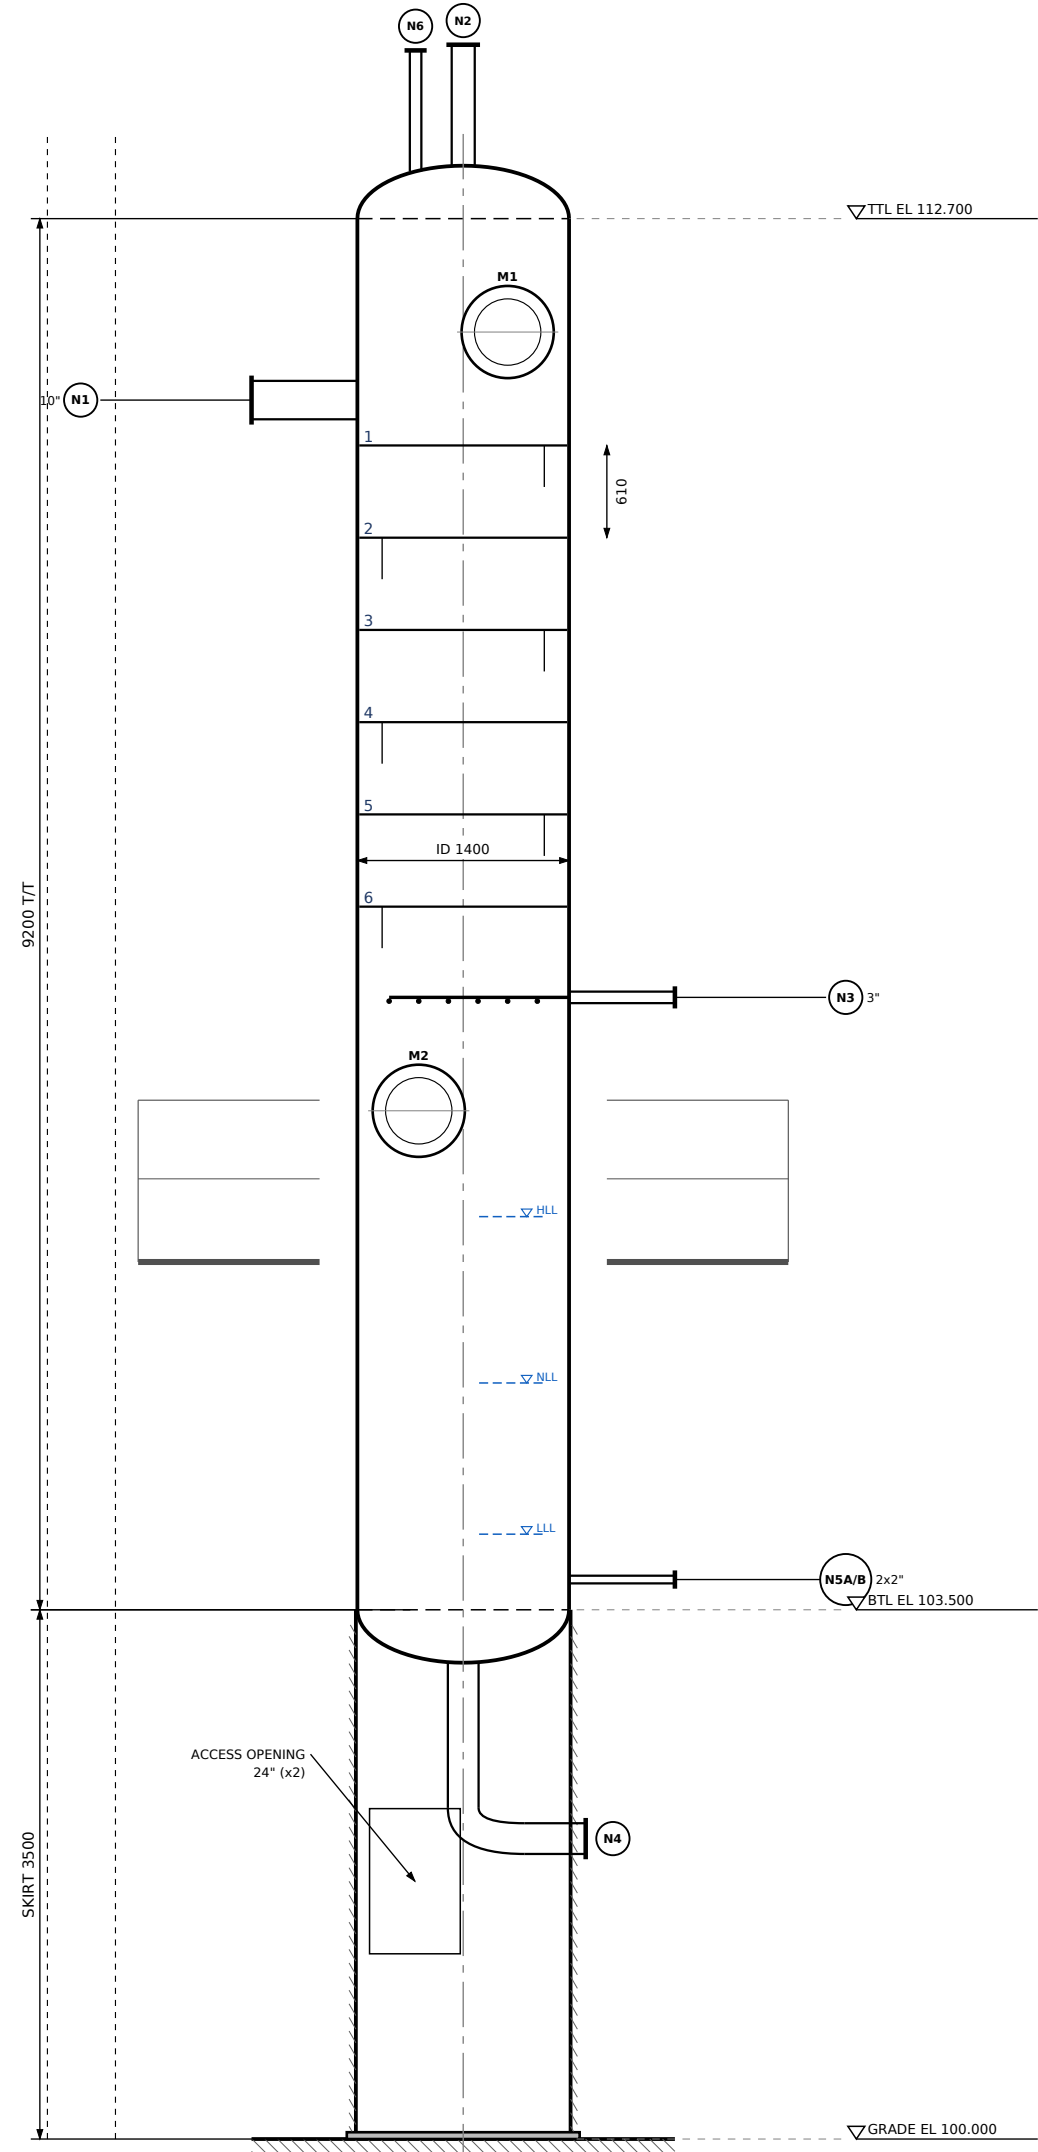

- NOTES**
- Dimensions in mm, elevations in m. Grade = EL 100.000.
 - Thicknesses are FEED minimum nominal (CFU-000-ME-CAL-001); fabricator to verify.
 - Nozzle orientations preliminary - to be confirmed by piping study.
 - Platforms 1200 wide, 60 % wrap; caged ladders not shown in full.
 - Datasheet CFU-000-ME-DS-001; weights in data/mech.json.
 - Strippers fed by gravity from C-101 draw trays; vapour returns above draw trays.
 - PSV-1009 common to C-102/103/104 (locked-open valves) - HOLD.
 - Skirt heights set by NPSH of P-109/110/111 (CAL-001 S9).

REV	DATE	DESCRIPTION	
A	2026-10-02	Issued for review (FEED)	
GENERIC REFINERY - GULF COAST 100 KBPSD CRUDE & VACUUM DISTILLATION UNIT			
COLUMN GENERAL ARRANGEMENT C-102 / C-103 / C-104 SIDE STRIPPERS			
DISCIPLINE	STAGE	SCALE	SHEET
MECHANICAL	FEED	1:50	1 OF 1
DRAWN	CHECKED	APPROVED	DATE
CLAUDE CODE	-	-	2026-10-02
DRAWING NUMBER			REV
CFU-100-ME-GA-002			A