

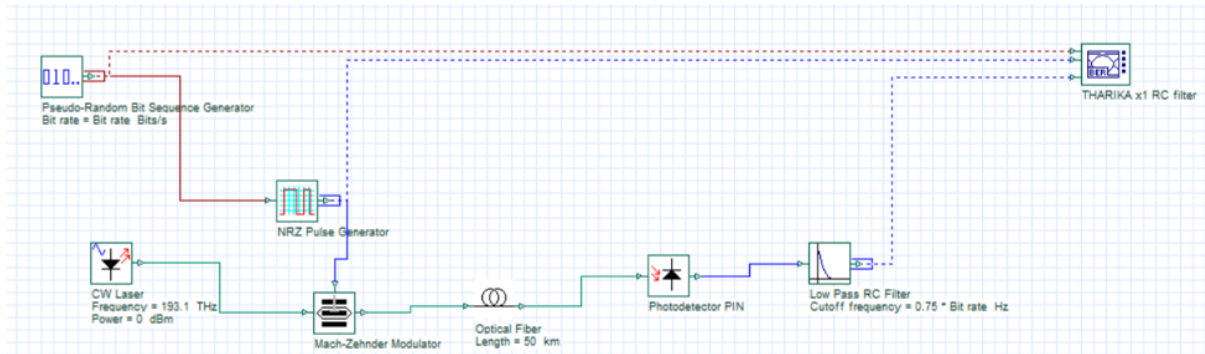




EXP 1 : FIBER OPTIC LINK ESTABLISHMENT AND BER MEASUREMENT USING DIFFERENT LOW PASS FILTERS.

CIRCUIT DIAGRAM:

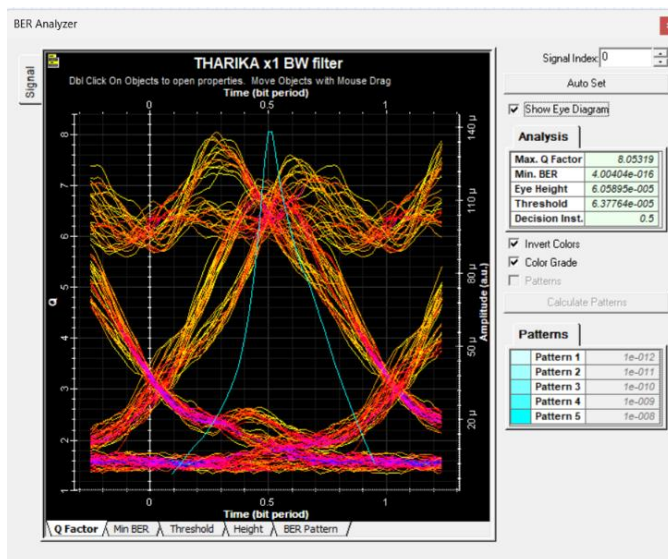

BER OUTPUTS:

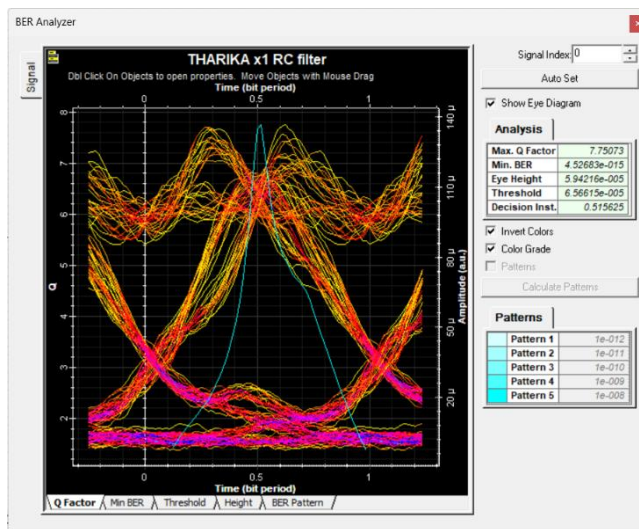

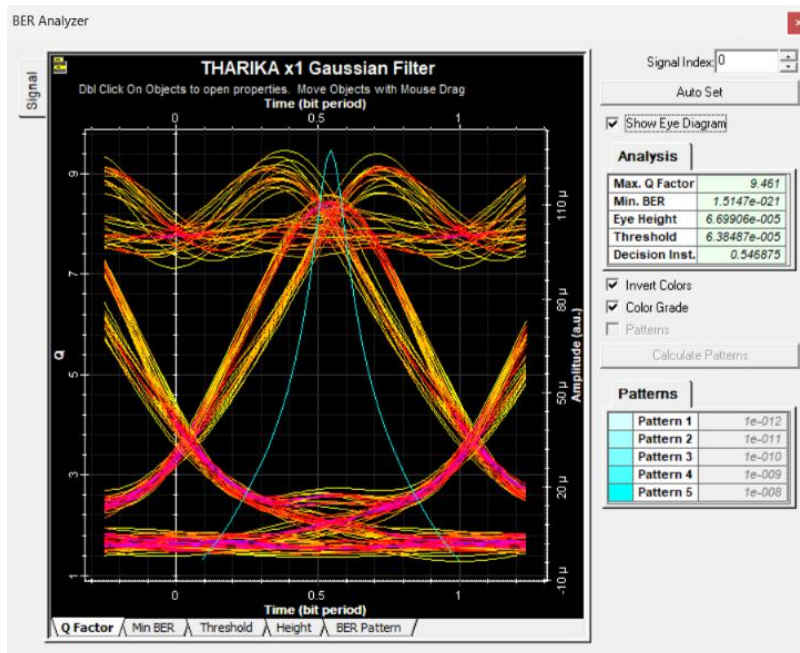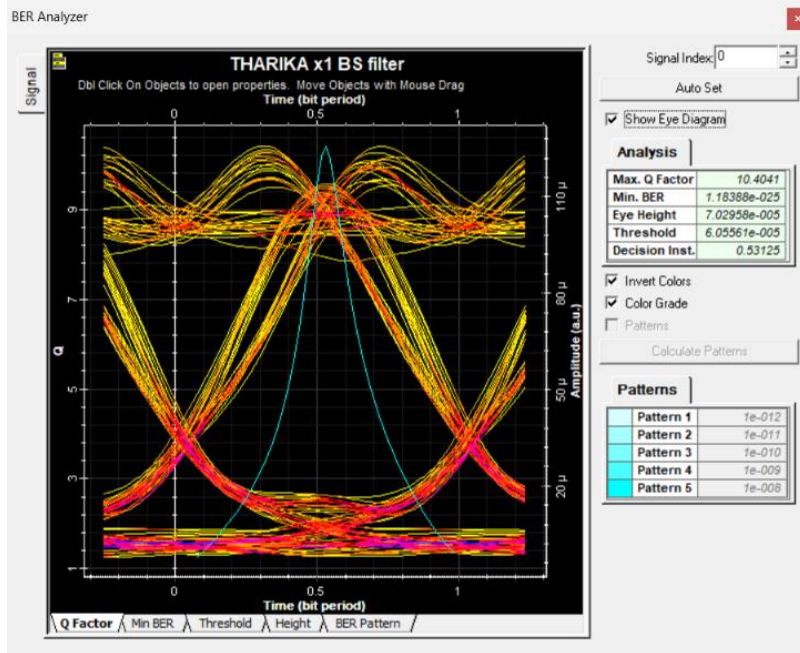

OUTPUT TABLE:

S.N O	FILTER	MIN BER	MAX Q FACTO R	EYE HEIGH T	THRESHOL D	DECISIO N INST.
1	RC	4.52 e-015	7.75	5.94e- 005	6.55e-005	0.515
2	BUTTERWORT H	4.00e -016	8.053	6.058e- 016	6.377e-005	0.5
3	GAUSSIAN	1.51e -021	9.461	6.699e- 005	6.38e-005	0.546
4	BESSEL	1.18e -025	10.40	7.02e- 005	6.055e-005	0.531