

Maré — morphology brief

Draft for PI review. Prepared to support proposal teams planning research in Maré.

Purpose

MorphoFavela has already computed a detailed morphometric characterisation of Maré — built form, sky access, solar exposure, and geometry-derived ventilation tendencies — at 10 m grid and street-segment resolution across the whole 4.34 km² settlement. This brief summarises what exists so a proposal team can scope new work against it rather than starting from zero: what is measured, at what resolution, and what the PI can share. It is not a results paper — it is an inventory, written for researchers deciding whether and how to build on this morphological base.

Maré at a glance

Area	4.34 km ²
Typology	flatland
Buildings (site + context)	39,322
10 m grid cells	43,419 (67.3% built)
Mean building height	7.1 m
Annual mean street-level sun	7.07 h/day
Dominant wind sector	SE (26% of observations)

Maré is the largest of MorphoFavela's five campaign sites and the flattest — a flatland settlement built out over former mangrove and reclaimed land, organised around several distinct planned-housing projects and later infill. Its scale and its structural regularity (large, near-saturated block interiors) make it a useful counterpoint to the hillside sites in the same campaign.

Data inventory

Layer	Resolution / unit	Provenance	Derived or restricted	Shareable form
Building footprints (input)	per-building polygon	municipal cadastre (2019) + LiDAR height attributes	restricted input	not shareable; pipeline is open
Digital terrain model (input)	5 m raster	municipal DTM	restricted input	not shareable; pipeline is open
Morphometric grid	10 m cell, 43,419 cells	derived (λ_p , height, porosity, SVF, slope per cell)	derived aggregate	shareable, de-georeferenced
Street-level SVF and solar hours	per street sample point (84,147 points)	derived (ray-cast SVF + sun-position accumulation)	derived aggregate	shareable, de-georeferenced
Street-segment SVF	per segment (2,147 segments)	derived, aggregated from street points	derived aggregate	shareable, de-georeferenced
Geometry-derived ventilation tendencies	per built cell	derived (λ_f regime, lateral depth, wind exposure)	derived aggregate	shareable, de-georeferenced
Wind climatology	eight-sector rose	Galeão (SBGL) METAR via Iowa ASOS, 89,439 observations, 2015–2024	derived aggregate	shareable

Per-cell georeferenced layers (coordinates attached) are available on request under the project's data-sharing conditions; see Availability and terms, below.

Built form

Four indicators characterise the built fabric at 10 m resolution: plan density (λ_p — the fraction of each cell covered by building footprint), mean building height, porosity (the complement of λ_p), and Sky View Factor (SVF, the fraction of hemispheric sky visible at pedestrian height).

Maré — built-form indicators (10 m grid)

Plan density (λ_p)



Mean building height



Porosity



Sky View Factor



Figure One.

Plan density, mean height, porosity, and Sky View Factor across Maré's grid, each in five discrete classes. No basemap; scale bar and north arrow only.

Across all 43,419 grid cells (built and unbuilt), median λ_p is 0.426 (IQR 0–0.992) and median SVF is 0.534 (IQR 0.269–0.803). Restricted to the 29,229 built cells (67.3% of the grid), median mean height is 6.93 m (IQR 5.28–8.61 m) and median height variability (σ_H) is 1.9 m (IQR 1.3–2.52 m) — consistent with the predominantly two- to three-storey construction typical of the campaign. Median porosity on built cells is 0.191 (IQR 0–0.6).

The low all-cell λ_p median alongside the low built-cell porosity reflects Maré's structure: large, near-saturated housing-project block interiors (porosity close to zero) separated by substantial unbuilt ground — open land, canals, and the settlement's low-density fringes — that pulls the whole-grid density figure down.

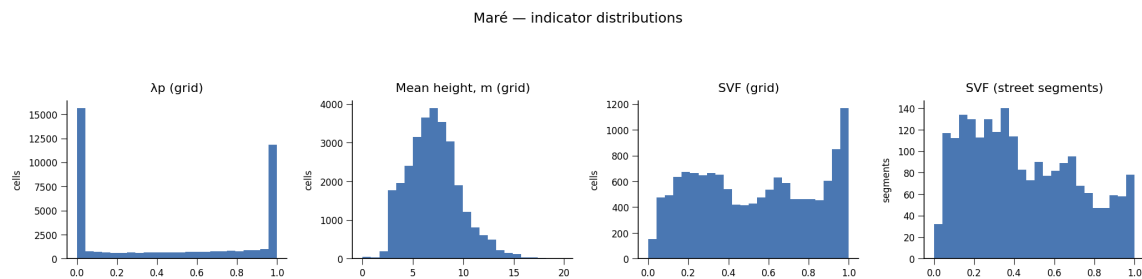


Figure Two.

Histograms of λ_p , mean height, SVF (grid) and street-level SVF (segments) across Maré.

Sky access and sun

Street-level Sky View Factor and direct-sun hours are computed at 84,147 passageway sample points (aggregated to 2,147 street segments) via ray-casting and sun-position accumulation on four reference dates. Median street-segment SVF is 0.392.

Maré — street-segment Sky View Factor



Figure Three.

Sky View Factor by street segment, five discrete classes; no basemap, no coordinates.

Mean street-level direct-sun hours are 5.2 h/day at the winter reference date, 7.07 h/day on the unweighted annual proxy (mean of the four reference dates), and 8.7 h/day in summer — a seasonal range of 3.5 h. Against the 2 h/day daylight-adequacy floor of the

Athens Charter (1943), Point 26

, 27.8% of street points fall below the floor at the winter reference date, 9.88% on the annual proxy, and 5.3% in summer.

A companion classification crosses this sun floor with the enclosure threshold used elsewhere in the campaign (frontal-area density $\lambda_f > 0.35$) at grid-cell resolution. Of the 24,348 classified cells, 10.6% meet the sun floor and sit below the enclosure threshold, 0.361% fall below the sun floor only, 54.8% sit above the enclosure threshold only, and 34.2% meet neither condition; the remaining cells (43.9% of the full grid) lack sufficient sample coverage to classify.

MARÉ · diagnostic map (pre-CFD; geometric λ_f proxy for ventilation)

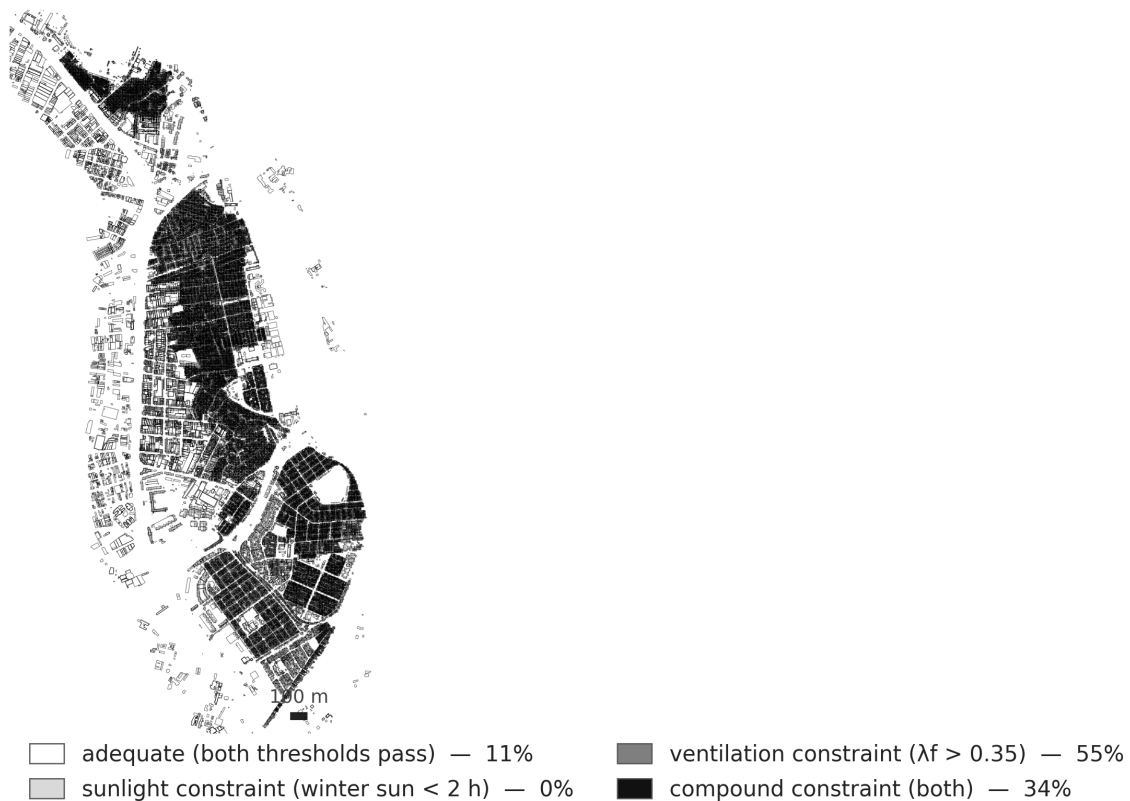


Figure Four.

Cell-level co-occurrence of the Athens Charter sun floor and the campaign enclosure threshold, already band-classed for publication.

Geometry-derived ventilation potential

Three geometric tendencies — never air-exchange adequacies — extend the built-form picture with two more degrees of ventilation-relevant structure: vertical enclosure (λ_f regime), lateral depth into contiguous fabric, and directional wind

exposure. Across Maré's 29,229 built cells, 64.8% meet the campaign's high-enclosure threshold on frontal-area density λ_f (vertical constraint), 47.9% sit at or beyond the campaign's median lateral open-edge distance (lateral constraint), and 75.3% have a directional wind-exposure ratio at or above the isotropic baseline (directional constraint). Counting how many of these three independent axes each cell trips: 9.83% trip none, 24.3% trip one, 33.8% trip two, and 32% trip all three.

The wind climatology behind the directional axis comes from Galeão (SBGL) METAR via Iowa ASOS (89,439 observations, 2015–2024, calm fraction 3.69%). The dominant sector is SE at 26% of observations; the median directional wind-exposure ratio across Maré's built cells sits near the isotropic baseline, at 1.01.

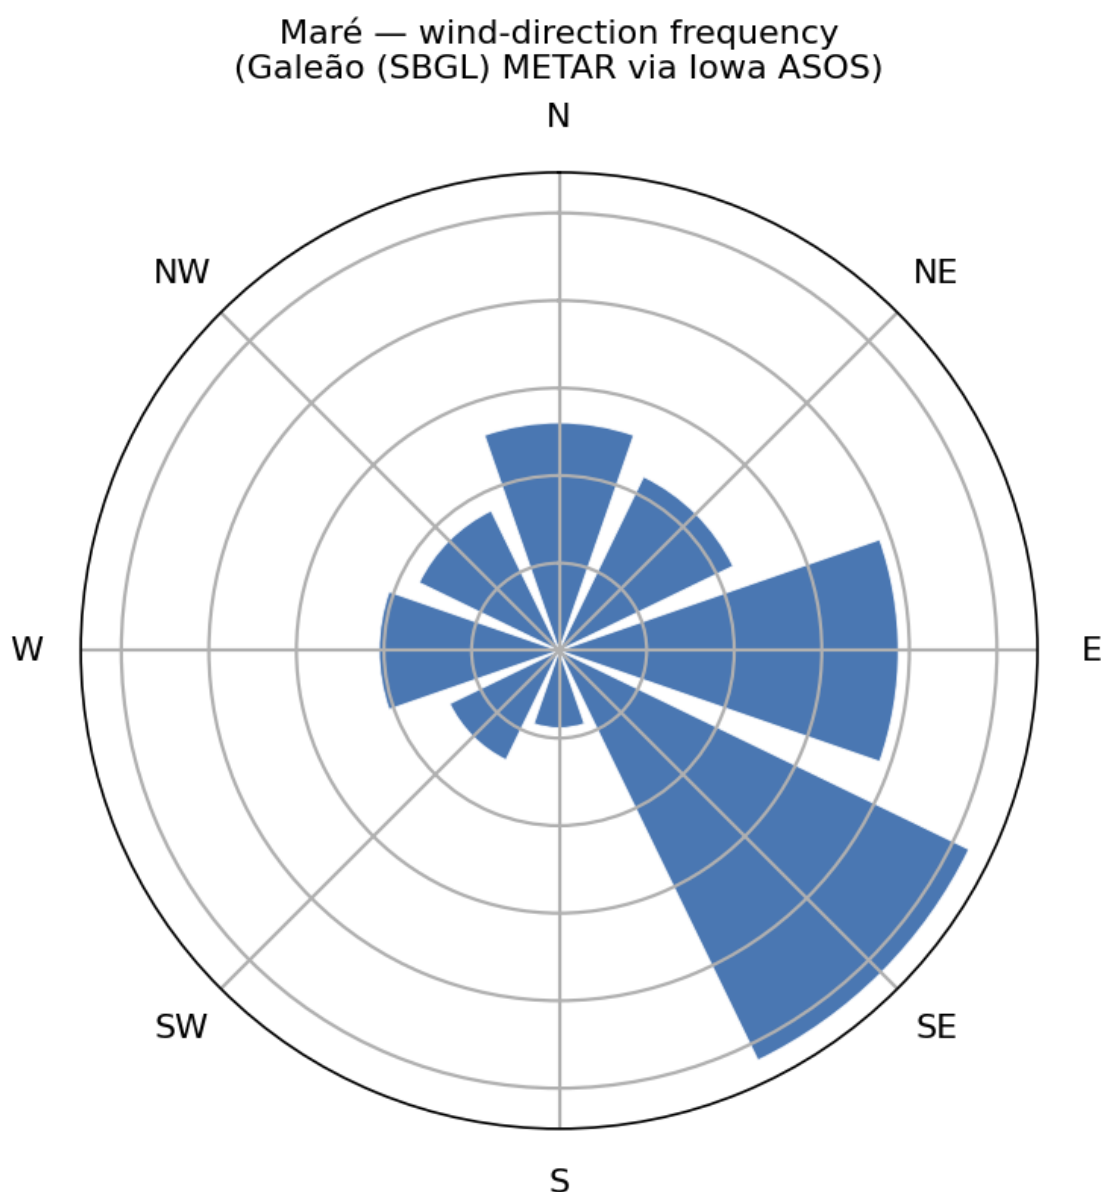


Figure Five.
Measured wind-direction frequency, Galeão (SBGL) METAR via Iowa ASOS.

A morphometric roughness-length estimate is also available per patch, but its published method envelope is wide at Maré's density: across 25 sampled patches, 56% fall outside the calibration range of the published drag-partition methods used, and 20% hit the estimator's lower floor. No absolute roughness value is reported here for that reason.

These geometric tendencies are a pre-simulation prioritisation surface, not a ventilation verdict. A wind-simulation study of two Maré patches is a parked companion track with no results to report at this time.

Maré among the five campaign sites

MorphoFavela's five-site campaign spans hillside and flatland informal settlements in Rio de Janeiro. Maré is one of two flatland sites in the campaign, distinguished among them by its scale and by the near-uniform block interiors of its planned-housing sections. This section positions Maré within that typology; it is not a ranking of the five sites.

The campaign's fabric-vector clustering assigns each built cell to one of six recurring morphotypes. Maré's composition:

Morphotype	Share of built cells
T0 — Open Fringe	7.54%
T1 — Flatland Consolidated	3.65%
T2 — Hillside Fringe	1.16%
T3 — Shaded Consolidated	0.298%
T4 — Hillside Core	11.8%
T5 — Saturated Core	75.6%

Maré's fabric is dominated by T5 Saturated Core (λ_p near its maximum), the flatland-conditional type associated with the tight, near-fully-covered block interiors of the original housing-project layout; T4 Hillside Core, the type universal across all five campaign sites, is present as a secondary component. T1 and T5 are present only where flat buildable land exists, which is why they concentrate at the two flatland sites rather than recurring campaign-wide.

Availability and terms

Derived aggregates — the morphometric grid, street-level SVF and sun-hour summaries, geometry-derived ventilation tendencies, and the wind climatology — can be shared, including a de-georeferenced version of the grid (relative cell indices, no coordinates). The underlying building cadastre and LiDAR-derived

terrain inputs cannot be shared in any form that reconstructs them (licence-restricted third-party data). Per-cell georeferenced layers are available on request under the project's conditions.

Contact: \${pi_contact}

Methods notes and references

- Sky View Factor: Tregenza sky discretisation, ray-cast at pedestrian height from passageway sample points.
- Frontal-area density and enclosure-threshold classification: Oke (1988); Stewart & Oke (2012), local climate zones.
- Daylight-adequacy floor: Athens Charter (1943), Point 26.
- Roughness-length estimation: morphometric drag-partition methods, method envelope only; not independently validated at time of writing.