HH35L 2.0
Multi-Spectrum Binocular



The HIKMICRO HABROK 4K 2.0 HH35L 2.0 is a multi-mode binocular combining thermal and digital imaging capabilities. It features a 384×288 thermal detector (NETD <15 mK) with a 35mm F1.0 lens for detection up to 1800m, alongside a 4K CMOS sensor and 60mm F2.2 digital lens offering 4x–20x zoom. Integrated with a shutterless imaging system and a 1000m laser rangefinder, it delivers high-performance observation for hunting, wildlife monitoring, exploration, and search-and-rescue operations in varied conditions.

Key Feature

- 384x288 resolution @12μm thermal detector
- High sensitivity thermal module NETD ＜ 15 mK (@25°C, F# = 1.0)
- 35mm, F1.0 lens with thermal detection range up to 1800m
- 3840 x 2160 4K Ultra high-resolution CMOS detector
- 60mm, F2.2 digital lens with 4.0x-20.0x digital zoom
- HIKMICRO Shutterless Image System (HSIS)
- 940nm & 850nm replaceable IR illuminators and Laser Rangefinder of 1000m distance
- 900g lightweight, with a compact and ergonomic design

· Specification

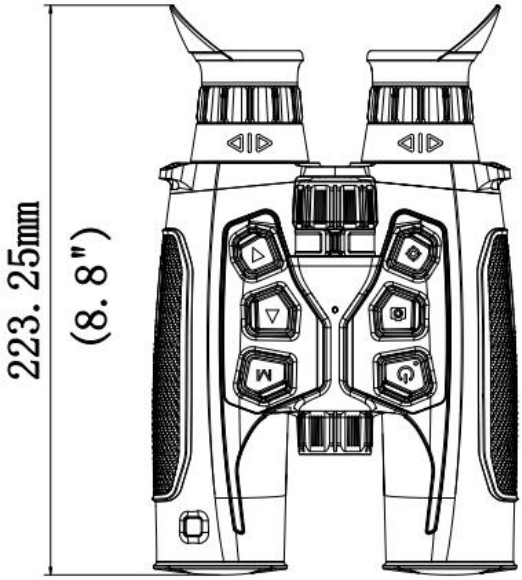
Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	384x288
Frame Rate	50Hz
Pixel Interval	12μm
Response Waveband	8μm to 14μm
NETD	Less than 15 mK (@25℃),F#=1.0
Lens (Focal Length)	35mm, F1.0
Focus Mode	Rear Focus Wheel
Detection Range	1800m
Min. Focusing Distance	5m
Magnification	4.0x-20.0x (5x) Support 2×, 3x, 4x, 5x Zooming Value, Support Zoom in and out
Field of View(H × V), Degrees / m @100m	7.53° x 5.65° / 13.16×9.87@100m
Optical Module	
Image Sensor	1/1.8 Progressive Scan CMOS
Max. Resolution	3840 x 2160
Focal Length	60mm, F2.2
Min. Working Distance	8m
Focus Mode	Rear Focus Wheel
Magnification	5.5x - 22.0x （4x) Support 2×, 3x, 4x, 5x Zooming Value, Support Zoom in and out
Field of View (H × V), Degrees/m @100 m	7.3° x 4.1° / 12.8m × 7.2m
Smart IR	Yes
IR Illuminator Wavelength	940nm (default) and 850nm (replaceable)
Viewing Range at Night	400m
Replaceable IR Illuminator	Yes
Image Display	
Display	0.49 inch, OLED, 1920 ×1080
Palettes	Thermal: Black Hot, White Hot, Red Hot, Red Monochrome， Green Monochrome， Fusion; Optical: Day, Night, Auto, Green, Yellow
Exit Pupil	8mm
Eye Relief	15mm
Diopter (Range)	-5D~+3D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes
Electric Image Stabilization	Supports Both Thermal and Digital Channels, Starting from 2x
Zoom Pro	Yes

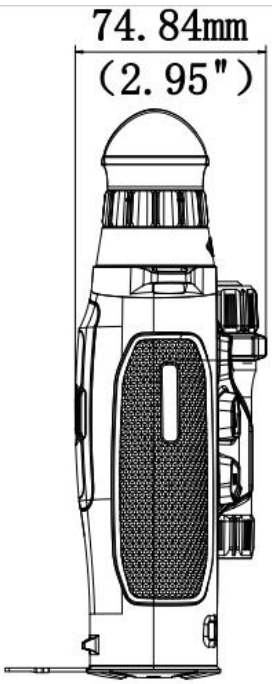
HSIS (HIKMICRO Shutterless Image System)	Yes
System	
Record Video	Yes
Capture Snapshot	Yes
Audio Recording	Yes
Standby Mode	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Hotspot	Yes
Hot Track	Yes
Digital Magnetic Compass	Yes
Local Album	Yes
Power Supply	
Battery Type	Replaceable and Rechargeable Li-ion Battery
Battery Operating Time	≥6.5h (25 ℃, with hotspot and LRF on)
Type-C Power Supply	5V DC, 2 A Supports External Power Supply, Support Direct Charging
General	
Protection Level	IP67
Dimension	143.1mm × 74.8 mm × 223.3 mm (5.63" × 2.95" × 8.8")
Weight	900g without Batteries
Working Temperature	-30℃ ~ +55℃
Interpupillary Adjustment Range	60 mm to 74 mm
Mounting Adapter	1/4 ″-20-UNC
Laser Rangefinder	
Safety Class for Laser	Class 1
Wavelength	905nm
Max. Measuring Range	1000m
Measurement Accuracy	±1m
Min. Measuring Range	10m

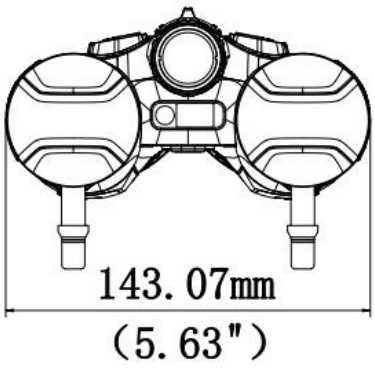
· Available Model

HM-TSE3-35Y1G/W1LVN-HH35L 2.0

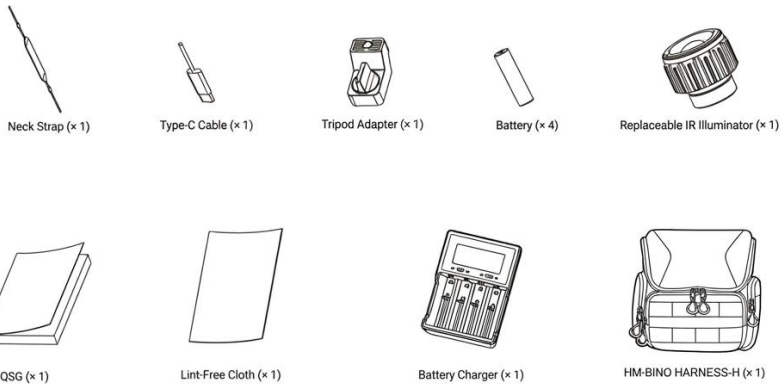
· Dimension


223.25mm
(8.8")


74.84mm
(2.95")


143.07mm
(5.63")

Unit:mm (Inch)


Neck Strap (× 1)
Type-C Cable (× 1)
Tripod Adapter (× 1)
Battery (× 4)
Replaceable IR Illuminator (× 1)
QSG (× 1)
Lint-Free Cloth (× 1)
Battery Charger (× 1)
HM-BINO HARNESS-H (× 1)

· Accessory

- **Included**

HM-BINO HARNESS-H

HM-BINO HARNESS-H



HIKMICRO



HIKMICRO SIGHT

Download on the App Store

GET IT ON Google Play

BATTERY 1 YEAR

FULL PRODUCT 3 YEARS

DETECTOR 10 YEARS

Hikmicro Hunting.Global | HIKMICRO Outdoor | www.hikmicrotech.com | hikmicro hunting.global | HIKMICRO | info@hikmicrotech.com

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang

© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!