# SQ35L 3.0

# Thermal Scope



HIKMICRO STELLAR SQ35L 3.0 Thermal Scope is equipped with a 640 × 512 @12 μm thermal detector, with much higher sensitivity (NETD<15 mK) and the latest image processing algorithm (Image Pro 2.0) and shutterless system (HSIS), ensuring users catch the finest details no matter the weather or light conditions without interruption. With a 2560 × 2560 1.03” OLED larger display, SQ35L 3.0 makes it easier to spot targets quickly and accurately. The built-in 1000 m LRF and ballistic calculation contribute to more accurate shooting. The scope is mainly used for field and forest hunting.

## Key Feature

- 640 × 512 resolution @12 μm thermal detector
- High sensitivity thermal module NETD < 15 mK (@25°C, F# = 1.0)
- 35 mm, F1.0 lens with detection range up to 1800 m
- 2560 × 2560 resolution 1.03-inch OLED display
- HIKMICRO Shutterless Image System (HSIS)
- Built-in laser rangefinder up to 1000 m, with ballistic calculation
- Rechargeable internal batteries and external battery, 9h continuous operation
- High shock resistance up to 1000 g/0.4 ms

# Specification


| | |
|---|---|
| **Thermal Module** | |
| Image Sensor | VOx Uncooled Focal Plane Arrays |
| Max. Resolution | 640 × 512 |
| Frame Rate | 50 Hz |
| Pixel Interval | 12 μm |
| Response Waveband | 8 μm to 14 μm |
| NETD | Less than 15 mK (@25°C, F# = 1.0) |
| Lens (Focal Length) | 35 mm, F1.0 |
| Focus Mode | Focus Ring |
| Detection Range | 1800 m |
| Min. Focusing Distance | 3 m |
| Magnification | 2.5× to 24.5×<br>Support 1× step value of continuous zooming |
| Field of View(H × V), Degrees / m @100 m | 12.5° × 10.0°/ 21.9 m × 17.5 m |
| **Image Display** | |
| Display | 2560 × 2560, 1.03-inch OLED |
| Palettes | Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome |
| Exit Pupil | 6 mm |
| Eye Relief | 45 mm |
| Diopter (Range) | -4D to 4D |
| Brightness Adjustment | Yes |
| Tone Adjustment | Cold, Warm |
| Contrast Adjustment | Yes |
| Zoom Pro | Yes |
| Image Pro 2.0 | Yes |
| HSIS (HIKMICRO Shutterless Image System) | Yes |
| **System** | |
| Record Video | On-board Video Recording |
| Capture Snapshot | Yes |
| Audio Recording | Yes |
| Recoil-activation Recording | Yes |
| Standby Mode | Yes |
| Storage | Built-in EMMC (64 GB) |
| PIP | Yes |
| Hotspot | Yes |
| Hot Track | Yes |
| Distance Measurement | Yes |
| Zeroing Profiles | 5 |

| | |
|---|---|
| Freeze Zeroing | Yes |
| Max. Recoil | 1000 g/0.4 ms |
| Local Album | Yes |
| Ballistic Calculation | Yes |
| **Power Supply** | |
| Battery Type | Two rechargeable Lithium batteries (internal), one replaceable and rechargeable 18650 battery (external) |
| Battery Operating Time | 9 hours continuous running (@25°C, Zoom Pro, LRF on) |
| Type-C Power Supply | DC 5 V/2 A, USB Type-C interface<br>Supports QC3.0<br>* Only the built-in battery will be charged via the type-C cable. Use the battery charger to charge the external battery. |
| **General** | |
| Protection Level | IP67 |
| Mounting | Standard 30 mm |
| Dimension | 410 mm × 85 mm × 86.3 mm |
| Working Temperature | -30°C to 55°C (-22°F to 131°F) |
| Weight | 830 g without external battery |
| Center Height | 32 mm |
| **Laser Rangefinder** | |
| Safety Class for Laser | Class 1 |
| Wavelength | 905 nm |
| Max. Measuring Range | 1000 m |
| Measurement Accuracy | ±1 m |
| Min. Measuring Range | 10 m |

# · Available Model


HM-TR86-35S2G/WL-SQ35L 3.0

## · Dimension

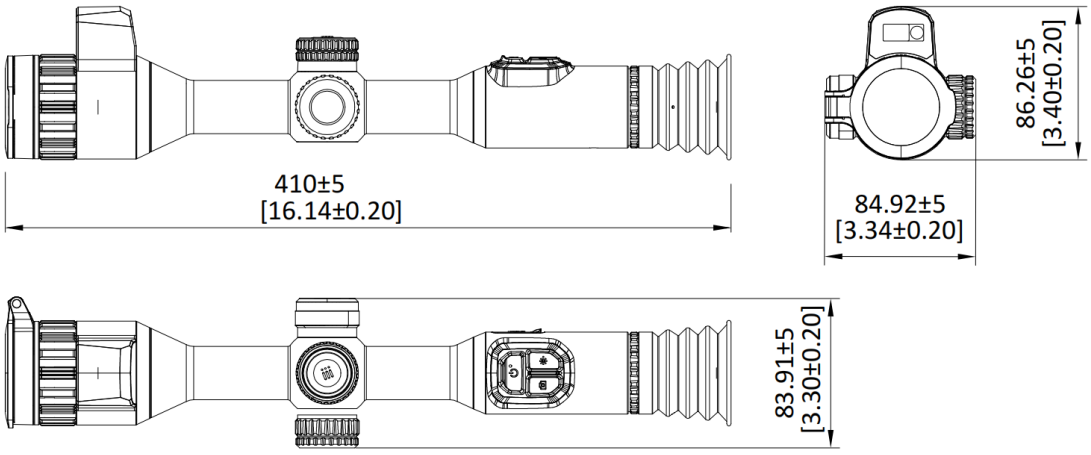


Unit: mm[inch]

## · Accessories

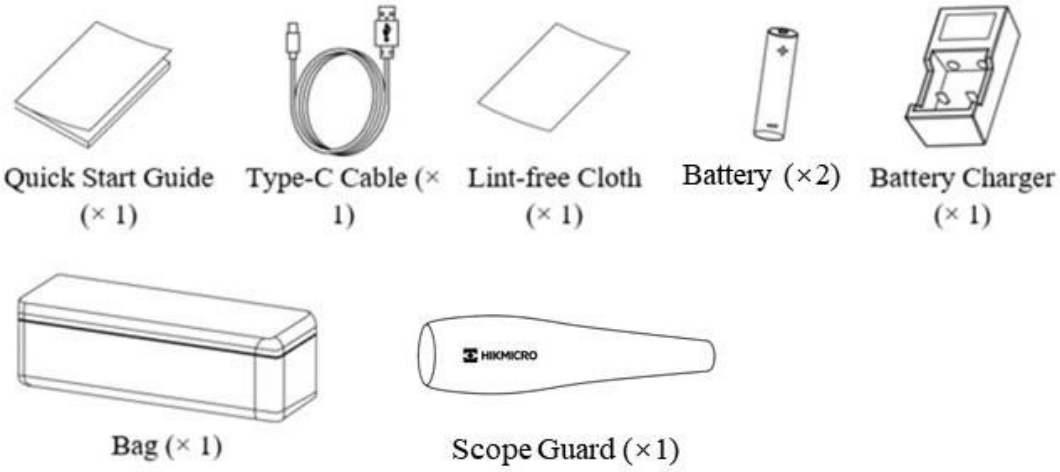


COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.

HIKMICRO

HIKMICRO SIGHT

Download on the App Store

GET IT ON Google Play

BATTERY 1 YEAR

FULL PRODUCT 3 YEARS

DETECTOR 10 YEARS

Hikmicro Hunting.Global | HIKMICRO Outdoor | www.hikmicrotech.com | hikmicro hunting.global | HIKMICRO | info@hikmicrotech.com

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!