SX60LS 3.0
Thermal Scope



HIKMICRO STELLAR SX60LS 3.0 Thermal Scope is equipped with the latest 50Hz 1280×1024 @12μm thermal detector, offering much smoother image display. With much higher sensitivity (NETD < 15mK) and the latest image processing algorithm (Image Pro 3.0), users can catch the finest details no matter the weather or light conditions without interruption. With a 2560×2560 1.03”OLED larger display, SX60LS 3.0 makes it easier to spot targets quickly and accurately. The built-in lens 1000m LRF and ballistic calculation contribute to more accurate shooting. The scope is mainly used for field and forest hunting.

Key Feature

- 1280×1024 resolution @12μm 50Hz thermal detector
- High sensitivity thermal module NETD < 15 mK (@25°C, F# = 1.0)
- 60mm, F1.0 lens with detection range up to 3100m
- 2560 × 2560 resolution 1.03-inch OLED display
- Built-in lens laser rangefinder up to 1000m, with ballistic calculation
- Rechargeable internal batteries and external battery, 6.5h continuous operation
- High shock resistance up to 1000g/0.4ms

· Specification


Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	1280×1024
Frame Rate	50Hz
Pixel Interval	12 μm
Response Waveband	8 μm to 14 μm
NETD	Less than 15 mK (@25°C),F#=1.0
Lens (Focal Length)	60mm, F1.0
Focus Mode	Focus Ring
Detection Range	3100m
Min. Focusing Distance	6m
Magnification	2.5×-28.5× Support 1× step value of continuous zooming
Field of View(H × V), Degrees / m @100m	14.6°×11.7°/25.6m×20.5m
Image Display	
Display	2560x2560, 1.03 inch OLED
FFC (Flat Field Correction) Mode	Auto, Manual, External Correction
Palettes	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome
Exit Pupil	6mm
Eye Relief	45mm
Diopter (Range)	-4D to 4D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes
HSIS (HIKMICRO Shutterless Image System)	No
Zoom Pro	No
Image Pro 3.0	Yes
Sync Pro	Yes
System	
Record Video	On-board Video Recording
Audio Recording	Yes
Capture Snapshot	Yes
Recoil-activation Recording	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Hotspot	Yes
Hot Track	Yes
Distance Measurement	Yes
Zeroing Profiles	5
Freeze Zeroing	Yes

Max. Recoil	1000g/0.4ms
Standby Mode	Yes
Ballistic Calculation	Yes
Local Album	Yes
Power Supply	
Battery Type	Two rechargeable Lithium batteries (internal), one replaceable and rechargeable 18650 battery (external)
Battery Operating Time	6.5 hours continuous running (@25℃, LRF on)
Type-C Power Supply	5 V DC/2 A, USB Type-C interface, Supports QC3.0 * Only the built-in battery will be charged via the type-C cable. Use the battery charger to charge the external battery.
General	
Mounting	Standard 30mm
Dimension	452.6mm x 94.3mm x78.9mm
Weight	1150g
Working Temperature	-30 ℃ to 55 ℃ (-22 °F to 131°F)
Protection Level	IP67
Center Height	41mm
Laser Rangefinder	
LRF Module in Lens	Yes
Wavelength	905 nm
Safety Class for Laser	Class 1
Max. Measuring Range	1000 m
Measurement Accuracy	±1 m
Min. Measuring Range	10 m

· Available Model

HM-TR8C-60S2G/WL-SX60LS 3.0

· Dimension

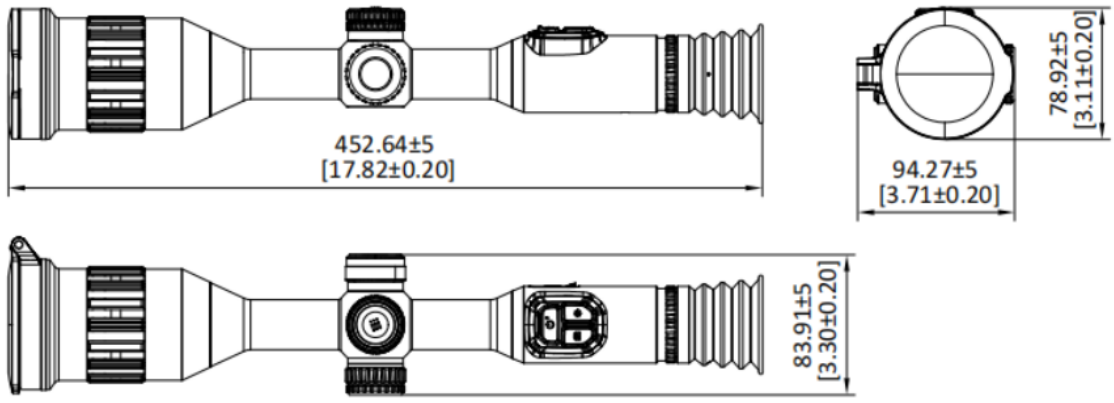


· Accesories



Quick Start Guide (× 1)



Type-C Cable (× 1)




Lint-free Cloth (× 1)



Battery (×2)



Battery Charger (× 1)



Bag (× 1)



Scope Guard (×1)

· Accessory

▪ Included

HM-3632DC
Battery



HIKMICRO



HIKMICRO SIGHT

Download on the App Store

GET IT ON Google Play

BATTERY 1 YEAR

FULL PRODUCT 3 YEARS

DETECTOR 10 YEARS

Hikmicro Hunting.Global | HIKMICRO Outdoor | www.hikmicrotech.com | hikmicro hunting.global | HIKMICRO | info@hikmicrotech.com

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang

© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!