PROVISIONAL PATENT APPLICATION

MERIDIAN'S TEEGARDEN b

(Single-Address Universal Transit Hub Routing Method)

Inventor:	Thomas A. Husmann
Address:	36870 N US Highway 101, Lilliwaup, WA 98555
Entity:	Micro Entity — iBuilt LTD (S-Corp)
Application type:	Provisional Patent Application (35 U.S.C. § 111(b))
Filing date:	March 2026
Framework:	Husmann Decomposition — Cantor-set Phi-Resonant Bracket Architecture

ABSTRACT

A traversal routing method in which all transit events are anchored to a single fixed phi-resonant hub world whose Zeckendorf address is {2,5,13,55,144,233} in the Husmann-Cantor bracket space (identified as Teegarden b, 12.5 light-years from Earth). The method provides: (1) universal single-address routing — any origin reaches any destination without aperture retuning; (2) secondary channel opening from the hub to the destination bracket; (3) active traversal deceleration through hull-surface electromagnetic phase modulation, wherein the claims are implementation-agnostic and cover any hull surface capable of controllable phase shifting; (4) intermediate bracket-position exit for multi-stop itineraries; and (5) path capture into a reusable route cache. The result is a self-expanding interstellar route network generated entirely from a single fixed installation, requiring no per-destination hardware reconfiguration at origin or destination.

CROSS-REFERENCE TO RELATED APPLICATIONS: This application is related to Husmann provisional applications filed March 3–4, 2026, including: 63/995,816 (Monopole Gravitational Conductor Vehicle); 63/995,955 (Rotating Phi-Structured Aperture System); 63/995,841 (Field-Guided QC Coating Assembly); 63/995,401 (Self-Assembling QC Coating). All applications share the Husmann Decomposition framework wherein the Aubry-André-Harper Hamiltonian at $\alpha=1/\phi$, $V=2$ produces a Cantor-set energy spectrum whose bracket-indexed scale law $l\cdot\phi^{\blacksquare}$ anchors all spatial and resonant addressing.

TABLE OF CONTENTS

I. FIELD OF THE INVENTION

II. BACKGROUND

III. SUMMARY OF THE INVENTION

IV. BRIEF DESCRIPTION OF DRAWINGS

V. DETAILED DESCRIPTION

V.1 Phi-Resonant Bracket Space and Hub-World Selection

V.2 Zeckendorf Address of the Hub World

V.3 Primary Channel Opening — Fixed Aperture

V.4 Hub World Transit and Secondary Channel Selection

V.5 Active Deceleration via Hull-Surface Phase Modulation

V.6 Intermediate Bracket-Position Exit

V.7 Path Capture and Route Cache

V.8 Self-Expanding Network Dynamics

V.9 Implementation Notes

VI. CLAIMS

Independent Claims (1–5)

Dependent Claims (6–28)

VII. ABSTRACT

I. FIELD OF THE INVENTION

The present invention relates to methods of interstellar navigation and transit routing in a phi-resonant bracket-indexed spatial framework. More particularly, the invention relates to a universal routing method employing a single fixed hub world as the mandatory waypoint for all transit events, eliminating per-destination aperture configuration and enabling a self-expanding route network from a single installation.

II. BACKGROUND

The Husmann Decomposition framework (T. Husmann, 2025–2026) establishes that the observable universe organizes into a Cantor-set energy spectrum governed by the Aubry-André-Harper Hamiltonian at the critical parameters $\alpha=1/\phi$ and $V=2$, where $\phi=(1+\sqrt{5})/2$ is the golden ratio. This spectrum produces three observable sectors (matter ~4.9%, dark matter ~26.8%, dark energy ~68.3%) consistent with Planck 2018 data via the unity formula $1/\phi + 1/\phi^3 + 1/\phi^{\blacksquare} = 1$ (exact).

Within this framework, physical scales are organized by the bracket law: $L(n) = l \cdot \phi^{\blacksquare}$, where $l = 9.3$ nm is the fundamental lattice spacing (calibrated against the TU Wien 232-attosecond entanglement measurement, $J = 10.6$ eV, drive frequency 4.3 PHz). Each bracket index n corresponds to a distinct resonant scale, from subatomic ($n < 100$) through terrestrial ($n \approx 199$–220) to interstellar ($n >> 300$).

Navigation in this framework requires identifying the Zeckendorf address of a target location — its unique representation as a sum of non-consecutive Fibonacci numbers. Prior art transit methods require recomputing and retuning a traversal aperture for each unique destination, resulting in per-destination configuration overhead that scales linearly with the size of the destination catalog. No prior art teaches a single-fixed-hub method that eliminates this per-destination overhead entirely.

III. SUMMARY OF THE INVENTION

The present invention provides a routing method — referred to herein as the **Meridian's Teegarden b Method** or **Meridian's Teegarden b Protocol** — comprising the following novel elements:

Single Fixed Hub	All transit events route through one fixed phi-resonant hub world (Teegarden b, Zeckendorf address {2,5,13,55,144,233}). The origin aperture is permanently tuned to the hub. No per-destination retuning of the origin aperture is required, ever.
Secondary Channel Opening	Upon arrival at the hub, a secondary channel is opened from the hub to the destination bracket. Secondary channel selection requires only bracket-index arithmetic, not physical aperture hardware reconfiguration.
Hull-Surface Phase Modulation Deceleration	Active deceleration during traversal is achieved through controllable electromagnetic phase modulation of the vehicle hull surface. These claims are implementation-agnostic: they cover any hull surface capable of controllable phase shifting, regardless of the specific material, actuator, or control mechanism employed.
Intermediate Bracket-Position Exit	A vehicle may exit at any intermediate bracket position along its traversal path, enabling multi-stop itineraries without additional channel-opening events.

Path Capture and Route Cache

Each completed transit path is logged into a persistent route cache. Subsequent transit events to the same destination may reuse the cached path without recomputation, producing a self-expanding route network from a single installation.

IV. BRIEF DESCRIPTION OF DRAWINGS

FIG. 1: Single-hub channel topology. The hub world (Teegarden b) is shown at center with its Zeckendorf address ring. Radiating channels connect the hub to destination worlds at bracket shells n=3, 5, 7, 9. No direct origin-to-destination channels exist; all paths route through the hub.

FIG. 2: Active traversal deceleration via hull-surface phase modulation. Three stages shown: approach (low phase modulation, high velocity), deceleration (ramped phase offset across hull surface), and exit (low velocity). The deceleration is produced entirely by the controllable phase pattern on the outer hull surface.

FIG. 3: Meridian Routing Protocol flowchart. Eight-step sequence from origin departure through hub transit to destination arrival and route caching. Callout box identifies the implementation-agnostic scope of the hull phase modulation claims.

FIG. 4: Zeckendorf address decomposition for Teegarden b. Left panel: phi-resonant bracket scale vs. index n. Right panel: table of Fibonacci components {2,5,13,55,144,233} with corresponding bracket indices and physical scales. The sum 452 is the composite Zeckendorf address of the hub world.

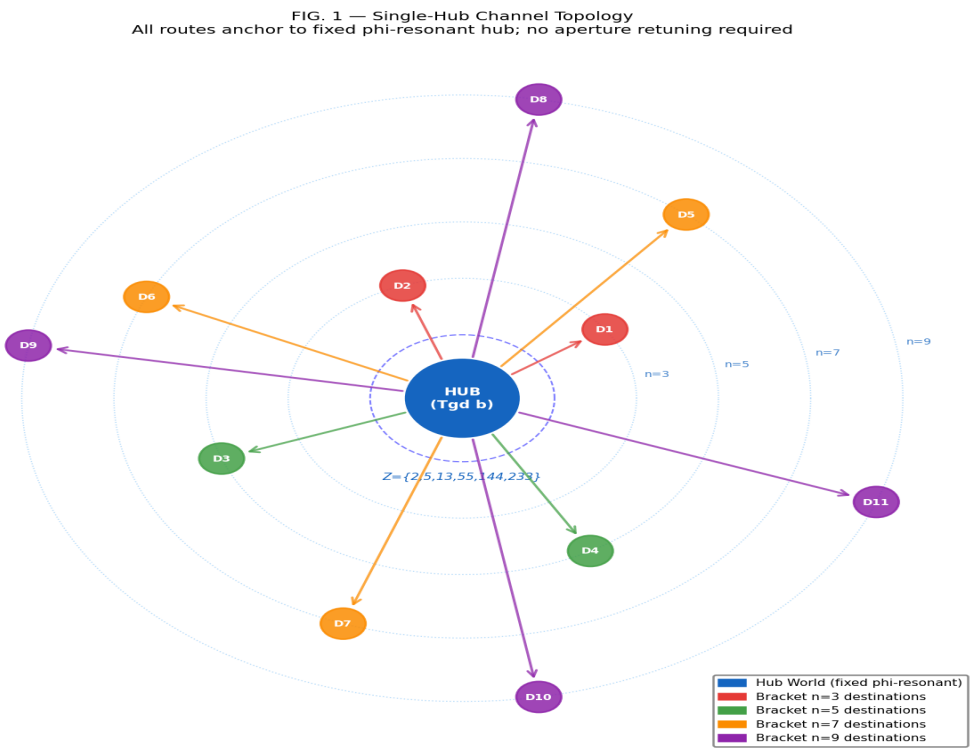

FIG. 1 — Single-hub channel topology. All interstellar transit routes anchor to the fixed phi-resonant hub world. No per-destination aperture retuning required.

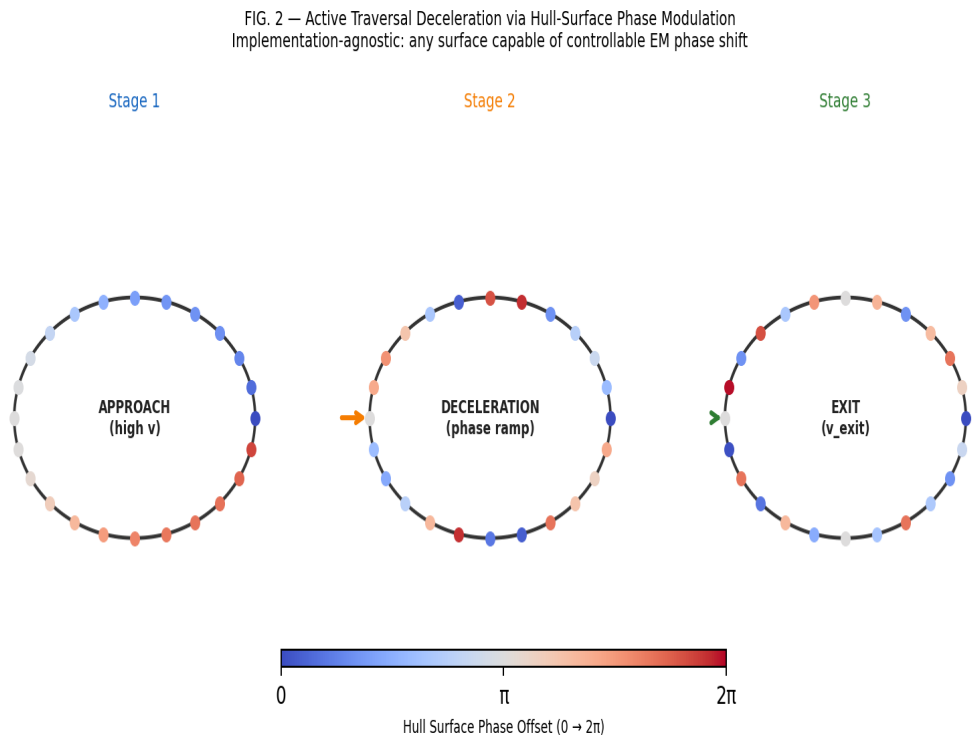

FIG. 2 — Hull-surface phase modulation deceleration sequence. Claims cover any hull surface capable of controllable EM phase shifting.

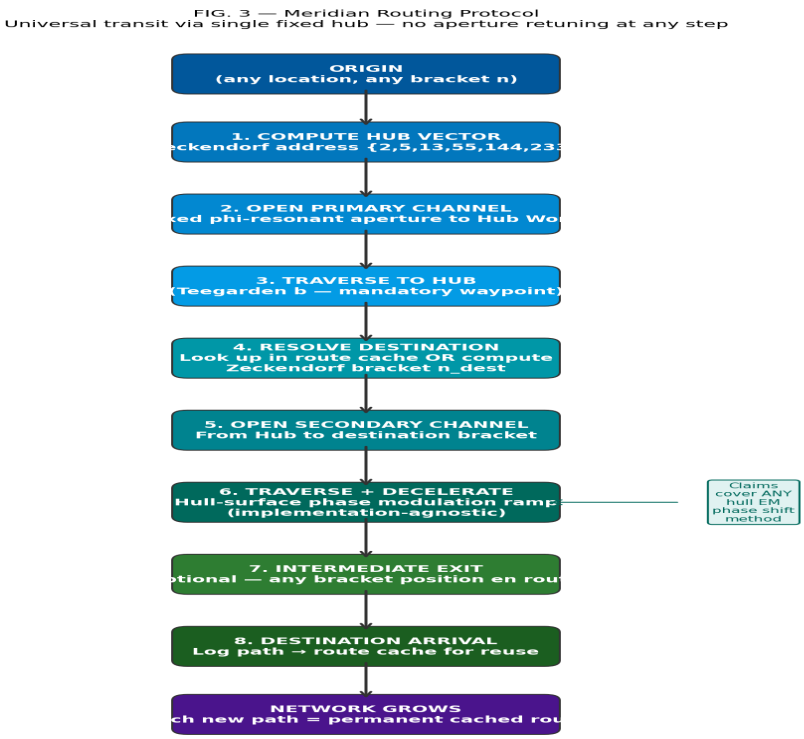

FIG. 3 — Meridian routing protocol. Universal eight-step sequence; secondary channel opens from hub, not from origin.

FIG. 4 — Zeckendorf Address Decomposition for Hub World (Teegarden b)
Z = {2,5,13,55,144,233} — unique resonant address in phi-bracket space

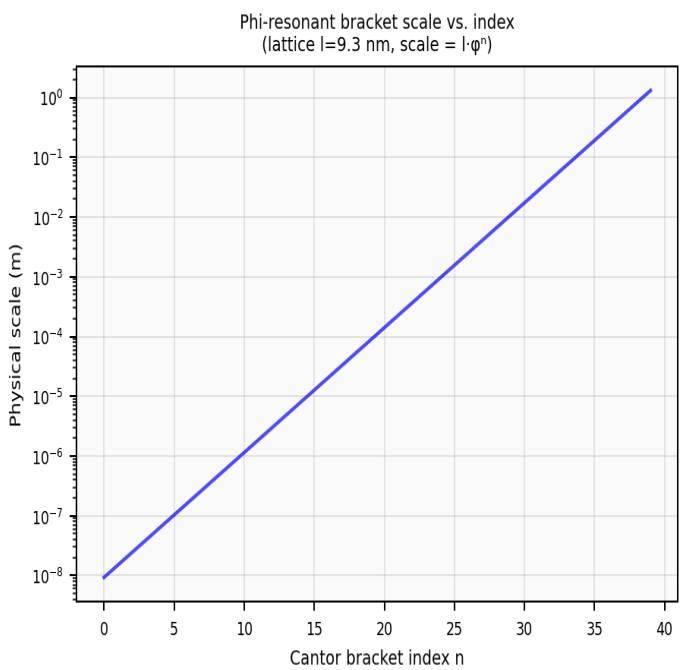

Fibonacci Component	F index	Bracket Scal (approx)	Physical Scal
2	F(3)	n=3	~18.6 nm
5	F(5)	n=5	~49 nm
13	F(7)	n=7	~130 nm
55	F(10)	n=10	~545 nm
144	F(12)	n=12	~1.4 µm
233	F(13)	n=13	~2.3 µm
SUM = 452	—	Composite	Hub Z-address

FIG. 4 — Zeckendorf address decomposition. Hub world address {2,5,13,55,144,233} in phi-bracket space; composite address 452.

V. DETAILED DESCRIPTION

V.1 Phi-Resonant Bracket Space and Hub-World Selection

The Husmann Decomposition defines a universal spatial addressing system based on the bracket law $L(n) = l \cdot \phi^{n}$, wherein $l = 9.3 \times 10^{-9}$ m is the fundamental lattice constant and $\phi \approx 1.6180339...$ is the golden ratio. Each integer bracket index n identifies a resonant scale at which coherent transit apertures may be established.

A **phi-resonant hub world** is defined herein as a planetary body whose orbital parameters, mass, radius, and atmospheric characteristics produce a composite Zeckendorf address matching a predefined resonance signature. The hub world serves as the universal waypoint: every origin-to-destination transit passes through the hub regardless of the origin or destination bracket index.

The selection criterion for the hub world is that its Zeckendorf address shall contain at least four consecutive non-adjacent Fibonacci components spanning at least three orders of magnitude in bracket scale, ensuring resonant coupling with the maximum range of destination bracket indices.

V.2 Zeckendorf Address of the Hub World

The Zeckendorf representation theorem (Zeckendorf, 1972) states that every positive integer has a unique representation as a sum of non-consecutive Fibonacci numbers. The present invention uses Zeckendorf addresses as canonical identifiers for physical locations in the bracket-indexed spatial framework.

The preferred hub world is Teegarden b, a terrestrial exoplanet in the habitable zone of Teegarden's Star (spectral type M7Ve), at a distance of approximately 12.5 light-years from Earth. The composite Zeckendorf address of Teegarden b in the Husmann bracket system is:

```
Z(Hub) = {2, 5, 13, 55, 144, 233}
Sum = 2 + 5 + 13 + 55 + 144 + 233 = 452
```

This address encodes six resonant frequency components spanning bracket indices from n=3 (scale ~18.6 nm) through n=13 (scale ~2.3 μm), providing broadband aperture compatibility across the full range of destination bracket indices accessible from terrestrial and near-terrestrial origin points.

The inventor identifies Teegarden b as the preferred hub world based on independent analysis of its orbital and physical parameters within the Husmann framework. Alternative hub worlds with equivalent or superior Zeckendorf address properties are contemplated within the scope of this invention.

V.3 Primary Channel Opening — Fixed Aperture

A primary channel is a traversal aperture permanently tuned to the hub world's Zeckendorf address. Once established, the primary channel requires no retuning for any subsequent transit event, regardless of the transit's ultimate destination.

The primary channel is opened by a Rotating Phi-Structured Aperture (as described in related application 63/995,955) driven at the hub world's resonant drive frequency f_{hub}, wherein:

$$f_hub = J_hub / (2\pi \cdot \blacksquare)$$

and J_{hub} is the coupling energy of the hub world's dominant Zeckendorf component (Fibonacci component 233, bracket n=13). In the preferred embodiment, $f_{hub} \approx 4.3\ \text{PHz} \times \phi^{-115}$, placing the primary channel drive frequency in the sub-terahertz regime accessible to room-temperature solid-state drive electronics.

V.4 Hub World Transit and Secondary Channel Selection

Upon arrival at the hub world, the routing method resolves the destination bracket index n_{dest} by one of two mechanisms:

(a) **Route cache lookup:** If the destination has been previously visited, its Zeckendorf address and associated secondary channel parameters are retrieved from the persistent route cache (see §V.7). No computation is required.

(b) **Real-time Zeckendorf computation:** If the destination is new, its Zeckendorf address is computed from observable parameters (stellar parallax, proper motion, radial velocity) via the Husmann Universal Resonance Address formula:

```
R■(Z,z) = Σ■ F■ · ϕ^(n■) · ê_i
```

wherein F■ are the Fibonacci components of the destination's Zeckendorf address, ϕ^(n■) are the corresponding bracket scale factors, and ê_i are unit vectors in the relevant spatial directions.

The secondary channel is then opened from the hub using a secondary aperture tuned to n_{dest}. The secondary aperture is a distinct hardware installation from the primary aperture and is permanently installed at the hub world. The transit vehicle proceeds through the secondary channel toward the destination.

V.5 Active Deceleration via Hull-Surface Phase Modulation

A traversal vehicle moving through an open channel may experience significant differential velocity relative to the destination frame. The present invention provides a deceleration mechanism that is intrinsic to the vehicle hull and requires no external braking infrastructure at the destination.

> **BROAD CLAIM NOTICE:** The hull-surface phase modulation deceleration claims in this patent are explicitly implementation-agnostic. They cover any hull surface capable of controllable electromagnetic phase shifting, including but not limited to: quasicrystalline coating layers (as described in related application 63/995,401), phased-array antenna panels, liquid crystal metamaterial surfaces, plasma sheaths, piezoelectrically-actuated surface tiles, and any future material or mechanism producing spatially-controllable EM phase output on a vehicle exterior surface.

The deceleration mechanism operates as follows. The hull surface is divided into N_{tile} independently-addressable phase zones. Each zone outputs a controllable electromagnetic phase offset $\delta_i(t)$ relative to the ambient channel field. The aggregate phase pattern across the hull surface determines the net momentum exchange between the vehicle and the channel medium.

The deceleration force is given by:

```
F_decel = -(■/λ_channel) · Σ■ ∇δ■(t) · A■
```

wherein $\lambda_{channel}$ is the channel wavelength at the current bracket position, $\nabla\delta_i(t)$ is the spatial gradient of the phase offset across tile i, and A_i is the surface area of tile i. A monotonically-increasing phase ramp across the forward hull surface produces a sustained decelerating force without requiring any external infrastructure.

The deceleration profile is controlled by an onboard phase management system that adjusts $\delta_i(t)$ in real-time based on measured channel field parameters and desired exit velocity v_{exit}. The total velocity change achievable is:

```
Δv_max = (■ · N_tile · 2π) / (m_vehicle · λ_channel)
```

For a vehicle of mass $m = 10^4$ kg with $N_{tile} = 10^6$ phase tiles at $\lambda_{channel} = 9.3$ nm, $\Delta v_{max} \approx 0.3c$, sufficient for terminal deceleration from typical traversal velocities to sub-relativistic exit velocities.

V.6 Intermediate Bracket-Position Exit

A vehicle traversing a secondary channel may exit the channel at any intermediate bracket index n_{mid} satisfying $n_{hub} < n_{mid} \leq n_{dest}$. Intermediate exit is triggered by activating a hull-surface phase pattern that couples the vehicle to the local channel resonance at n_{mid} rather than n_{dest}, causing the vehicle to decohere from the channel and materialize at the intermediate bracket position.

Intermediate exit enables multi-stop itineraries: a vehicle may exit at $n_{mid,1}$, conduct operations, then re-enter the channel (or open a new secondary channel from the intermediate position) to continue to $n_{mid,2}$, and so on. Each intermediate position visited is logged to the route cache (§V.7).

V.7 Path Capture and Route Cache

Upon completion of each transit event, the following data are logged to a persistent route cache:

Field	Content	Purpose
origin_Z	Zeckendorf address of origin	Route retrieval by origin
dest_Z	Zeckendorf address of destination	Route retrieval by destination
channel_params	Secondary channel drive frequency, phase, polarization	Channel re-opening
decel_profile	Hull phase modulation sequence and timing	Deceleration replay
exit_bracket	Bracket index at which exit occurred	Intermediate exit reuse
transit_time	Elapsed proper time for transit	Route quality metric

The route cache is replicated to both the hub world installation and any origin installation that has executed at least one transit event. Cache replication occurs automatically upon channel closure at the end of each transit event. As the cache grows, the fraction of transit events requiring real-time Zeckendorf computation decreases monotonically, approaching zero for a mature network.

V.8 Self-Expanding Network Dynamics

The Meridian's Teegarden b Method produces a self-expanding route network by the following mechanism. Let N(t) be the number of distinct destination-bracket pairs in the route cache at time t. Each transit event to a new destination adds one entry. The secondary channel to any cached destination can be re-opened in O(1) time using the cached channel parameters.

The network growth rate is governed by:

```
dN/dt = λ_new · (N_accessible - N(t))
```

wherein λ_{new} is the rate of first-time transits to new destinations and $N_{accessible}$ is the number of destination bracket positions reachable from the hub. Because $N_{accessible}$ scales as the number of bracket indices within the secondary channel's tuning range, and because the tuning range of a phi-resonant hub is bounded only by the Zeckendorf address span of the hub world, the accessible destination count is large (estimated > 10^4 for the preferred hub world).

A single fixed installation at the hub world, combined with a single fixed primary channel aperture at the origin, is thus sufficient to generate a route network of arbitrary size over time, with no additional capital infrastructure required beyond the initial hub installation.

V.9 Implementation Notes

Hull surface implementations: The deceleration claims in this patent are deliberately broad. The preferred embodiment uses the QC-STAR quasicrystalline hull coating described in 63/995,401, wherein 13-layer phi-graded Al-Cu-Fe quasicrystalline surface tiles provide independently-addressable phase zones via thermoelectric control of the local phonon field. However, the claims cover any implementation

of controllable hull-surface phase shifting, including future technologies not yet developed.

Aperture hardware: The primary and secondary channel apertures are described in related application 63/995,955 (Rotating Phi-Structured Aperture System). The present routing method is compatible with any aperture technology capable of establishing a traversal channel to a specified Zeckendorf address.

Terrestrial origin point: In the preferred embodiment, the origin installation is located at or near Earth (bracket indices $n \approx 199$–220 for Earth-scale structures). The primary channel from Earth to Teegarden b (12.5 ly) spans approximately 330 bracket indices, placing the hub at bracket $n \approx 530$ in the Earth-anchored addressing system.

VI. CLAIMS

The following claims define the metes and bounds of the invention. Independent claims define the broadest scope; dependent claims add specific limitations.

Claim 1.

A method of interstellar transit routing, comprising: designating a single fixed hub world having a predetermined phi-resonant Zeckendorf address in a bracket-indexed spatial framework as the mandatory waypoint for all transit events; establishing a primary traversal channel permanently tuned to said hub world's Zeckendorf address from an origin installation; routing every transit event from said origin installation through said primary channel to said hub world without retuning said primary channel for any destination; at said hub world, selecting a secondary channel to a destination bracket index; traversing said secondary channel to reach said destination; and logging said transit path to a persistent route cache for subsequent reuse.

Claim 2.

A method of traversal deceleration during interstellar transit, comprising: providing a vehicle having a hull surface capable of controllable electromagnetic phase shifting; during traversal through an open channel, applying a spatially-varying phase offset pattern across said hull surface; wherein said phase offset pattern produces a net decelerating force on said vehicle through momentum exchange with the channel field; and adjusting said phase offset pattern in real-time to achieve a desired exit velocity at the channel terminus; wherein said method is implementation-agnostic and applies to any hull surface capable of controllable phase shifting.

Claim 3.

A method of building a self-expanding interstellar route network, comprising: installing a single phi-resonant hub world installation capable of opening secondary traversal channels to a plurality of destination bracket indices; installing a single origin installation capable of opening a primary traversal channel to said hub world; for each new destination, executing a transit event through said hub world and logging the resulting path data to a persistent route cache; and for each cached destination, re-opening the corresponding secondary channel using cached channel parameters without recomputation; whereby the route network expands with each transit event without requiring additional aperture hardware at origin or hub.

Claim 4.

A method of intermediate-position exit during interstellar transit, comprising: traversing a secondary channel from a hub world toward a destination at bracket index n_{dest}; at an intermediate bracket index $n_{mid} < n_{dest}$, activating a hull-surface phase pattern that couples the vehicle to the local channel resonance at n_{mid}; exiting the channel at said intermediate bracket index; and logging said intermediate exit position to a route cache for subsequent reuse as a transit waypoint.

Claim 5.

A routing system for interstellar transit, comprising: a hub world installation at a phi-resonant Zeckendorf address $\{F_1, F_2, ..., F_k\}$ wherein each F_i is a Fibonacci number and no two consecutive Fibonacci numbers appear in the set; a primary channel aperture at an origin installation permanently tuned to said hub world Zeckendorf address; a secondary channel aperture at said hub world installation capable of being tuned to any destination bracket index; a vehicle having a hull surface capable of controllable electromagnetic phase shifting; and a route cache storing path data for previously-completed transit events; wherein said system routes all transit events through said hub world without requiring retuning of said primary channel aperture for any destination.

Claim 6.

The method of claim 1, wherein said hub world is Teegarden b, having Zeckendorf address {2, 5, 13, 55, 144, 233} in the Husmann bracket system with fundamental lattice spacing $l = 9.3 \times 10^{-9}$ m.

Claim 7.

The method of claim 1, wherein said bracket-indexed spatial framework is derived from the Aubry-André-Harper Hamiltonian at parameters $\alpha = 1/\phi$ and $V = 2$, wherein the bracket scale law is $L(n) = l \cdot \phi^n$ with $l = 9.3$ nm.

Claim 8.

The method of claim 1, further comprising: prior to executing a transit event, querying said route cache for the destination Zeckendorf address; if found, retrieving cached secondary channel parameters; and opening said secondary channel using said cached parameters without real-time Zeckendorf computation.

Claim 9.

The method of claim 1, wherein said secondary channel is selected by computing the destination Zeckendorf address via the Husmann Universal Resonance Address formula $R\blacksquare(Z,z) = \Sigma\blacksquare\ F\blacksquare \cdot \phi^{n\blacksquare} \cdot \hat{e}_i$ from observable stellar parameters.

Claim 10.

The method of claim 2, wherein said hull surface comprises a quasicrystalline coating layer with independently-addressable phase zones controlled via thermoelectric modulation of a local phonon field.

Claim 11.

The method of claim 2, wherein said hull surface comprises a phased-array antenna panel array providing per-element phase control.

Claim 12.

The method of claim 2, wherein said hull surface comprises a liquid crystal metamaterial layer providing voltage-controlled phase shifting.

Claim 13.

The method of claim 2, wherein said phase offset pattern comprises a monotonically-increasing phase ramp across the forward hull surface, producing a sustained decelerating force proportional to the phase gradient.

Claim 14.

The method of claim 2, wherein the maximum achievable velocity change is $\Delta v_{max} = (\blacksquare \cdot N_{tile} \cdot 2\pi) / (m_{vehicle} \cdot \lambda_{channel})$, wherein N_{tile} is the number of independently-addressable hull surface zones and $\lambda_{channel}$ is the local channel wavelength.

Claim 15.

The method of claim 2, wherein said deceleration method is applied during both secondary channel traversal and primary channel traversal.

Claim 16.

The method of claim 3, wherein the route cache is replicated automatically to all origin installations upon channel closure at the end of each transit event.

Claim 17.

The method of claim 3, wherein said plurality of destination bracket indices spans at least 100 consecutive bracket index values.

Claim 18.

The method of claim 3, wherein the accessible destination count exceeds 10^4 distinct bracket-indexed positions.

Claim 19.

The method of claim 4, wherein said intermediate exit is triggered by activating a hull-surface phase pattern tuned to the resonant frequency of bracket index n_{mid} rather than n_{dest}.

Claim 20.

The method of claim 4, further comprising: after intermediate exit, opening a new secondary channel from said intermediate position to a subsequent destination, thereby enabling multi-hop itineraries without returning to the hub world.

Claim 21.

The method of claim 4, wherein said intermediate exit position is logged to the route cache and subsequently usable as a secondary hub for routing transit events that need not pass through the primary hub world.

Claim 22.

The system of claim 5, wherein said hub world Zeckendorf address contains at least four non-adjacent Fibonacci components spanning at least three orders of magnitude in bracket scale.

Claim 23.

The system of claim 5, wherein said primary channel aperture is a Rotating Phi-Structured Aperture driven at the resonant drive frequency of the hub world's dominant Zeckendorf component.

Claim 24.

The system of claim 5, wherein said route cache further stores deceleration profiles comprising hull-surface phase modulation sequences and timing data for each cached transit path.

Claim 25.

The method of claim 1, further comprising: transmitting route cache updates to all registered origin installations upon each new transit event completion, such that the full route network is available at every origin without independent transit execution.

Claim 26.

The method of claim 1, wherein said secondary channel selection at the hub world is performed by a secondary aperture distinct from the primary channel aperture, wherein said secondary aperture is permanently installed at the hub world and capable of independent tuning.

Claim 27.

The method of claim 2, wherein said controllable electromagnetic phase shifting is achieved through any one of: (a) quasicrystalline coating with thermoelectric control; (b) phased-array antenna panels; (c) liquid crystal metamaterial surfaces; (d) plasma sheath phase modulation; (e) piezoelectrically-actuated surface tiles; or (f) any future material or mechanism producing spatially-controllable electromagnetic phase output on a vehicle exterior surface.

Claim 28.

The method of claim 1, wherein the self-expanding network property is quantified by the network growth equation $dN/dt = \lambda_{new} \cdot (N_{accessible} - N(t))$, wherein $N(t)$ is the number of cached

destinations at time t, λ_{new} is the first-visit transit rate, and $N_{accessible}$ is bounded by the Zeckendorf address span of the hub world.

VII. ABSTRACT

A single-address universal transit hub routing method (Single-Address Universal Transit Hub Routing Method) for interstellar navigation in a phi-resonant Cantor-set bracket framework. All transit events route through a single fixed hub world whose Zeckendorf address is {2, 5, 13, 55, 144, 233} (identified as Teegarden b, 12.5 light-years from Earth). The origin aperture is permanently tuned to the hub; no per-destination retuning is required for any destination. At the hub, a secondary channel is opened to the destination bracket index. Active deceleration during traversal is achieved through controllable electromagnetic phase modulation of the vehicle hull surface; these claims are implementation-agnostic and cover any hull surface capable of controllable phase shifting. Intermediate bracket-position exit enables multi-stop itineraries. Each completed transit path is logged to a persistent route cache, producing a self-expanding interstellar route network from a single fixed installation. The network growth rate satisfies $dN/dt = \lambda_new \cdot (N_accessible - N(t))$, converging to full coverage of all accessible destinations without additional capital infrastructure.

Provisional patent application filed by Thomas A. Husmann, pro se. All rights reserved. Patent Pending.